




Product Catalog
CAMLOG®
Implant System



Valid from September 2025



Content

Service

Clinical evidence and Science	2
-------------------------------	---

System information

The CAMLOG® Implant System	3
----------------------------	---

Surgery

Planning	18
PROGRESSIVE-LINE Implants and instruments	20
PROGRESSIVE-LINE Guide System instruments	26
PROGRESSIVE-LINE Flex instruments	33
SCREW-LINE Implants and instruments	37
SCREW-LINE Guide System instruments	45
Surgical instruments	48
SCREW-LINE Osteotomy Sets	53
Cover screws	58
Healing caps	58

Prosthetics

Scanbodies	64
Impression taking	65
Bite registration	66
Cast fabrication	67
Temporary restoration	68
Titanium bases CAD/CAM	69
Titanium bases CAD/CAM free	70
CAM blanks	71
Esthomic® Abutments	73
Universal and telescope abutments	75
Gold-plastic abutments	75
Multi-unit System	76
COMFOUR®	82
Ball abutment	87
ODSecure®	88

Locator®	90
----------	----

Locator R-Tx®	94
---------------	----

Abutment and lab screws	96
-------------------------	----

Prosthetic instruments	98
------------------------	----

Instruments for dental technicians	99
------------------------------------	----

Selection abutments	100
---------------------	-----

Auxiliary articles

Implants for practice	102
Insertion posts	102
Demonstration models	103
Macro models	103
Literature	104

Additional information

Indication overview	106
Implant overview	108
Prosthetics overview	109
Screw overview	122
Overview tightening torques	126
Materials	130

Additional documentation

Further documentation	133
Legal	133

Clinical evidence and Science

From the beginning, the Camlog company has set high standards in scientific documentation of all essential properties of their implant systems.

In **Clinical evidence and Science**, we have summarized the current state of research on Camlog Implant Systems.

We are happy to pass on this concentrated knowledge to you. You are also welcome to request a printed version.



www.biohorizonscamlog.com/clinical-evidence-and-science



The CAMLOG® Implant System



The CAMLOG® Implant System has been developed on the basis of many years of clinical and laboratory experience. It is a user-friendly, consistently prosthetically oriented implant system.

All CAMLOG® Products are manufactured with the latest state-of-the-art technology. The CAMLOG® Implant System is continuously being developed by the company's research and development team in collaboration with clinicians, universities and dental technicians and therefore stays abreast of the latest technology.

The CAMLOG® and CONELOG® Implant Systems are very well documented scientifically. Studies* support this with respect to many parameters including the implant surface, time of implantation and/or implant loading, primary stability, and the connection design.

*see "Further documentation" on page 133

CAMLOG® PROGRESSIVE-LINE Implants

The CAMLOG® PROGRESSIVE-LINE Implants make it easier to implement modern treatment concepts such as immediate restorations or immediate loading, which require high primary stability.^{1,2*}

The geometry of the implant is consistently designed to develop high initial stability:

- The self-tapping screw implant has a conically shaped apical area that enables pronounced primary stability even in soft bone.^{1,2*}
- Thread extending to the apex for good anchorage in immediate implantations.^{1,2*}
- Crestal thread for improved hold with limited residual bone height.^{2*}

The CAMLOG® PROGRESSIVE-LINE Implants are available with the Promote® plus Surface which features a 0.4 mm high machined implant neck. Depending on the clinical situation, this surface design thus permits slightly supracrestal or epicrestal implant positioning.

CAMLOG® PROGRESSIVE-LINE Implants with screw-mounted insertion post can be used for template guided implant dentistry.

CAMLOG® PROGRESSIVE-LINE Implants are equipped with the proven Tube-in-Tube® Implant abutment-connection and feature three symmetrically arranged angular grooves in the cylindrical part of the implant neck. The prosthetic restoration is performed with CAMLOG® Abutments, optionally also with components for Platform Switching.



* see "Further documentation" on page 133

Implant diameter



3.3 mm 3.8 mm 4.3 mm 5.0 mm

Implant lengths



Promote® Surface

CAMLOG® Implants are available with the abrasive-blasted, acid-etched Promote® Surface. The surface is based on current scientific knowledge and supports rapid osseointegration. Scientific results from studies with cell cultures, osteohistology and in pull-out trials illustrate this impressively.^{3*}

* see "Further documentation" on page 133

CAMLOG® SCREW-LINE Implants

CAMLOG® SCREW-LINE Implants are slightly conical, self-tapping screw implants. They enable easy insertion by self-centering with continuous bone contact and thus achieve solid primary stability.



CAMLOG® SCREW-LINE Implants are available with both the Promote® Surface (1.4 mm machined implant neck section) and the Promote® plus Surface (0.4 mm machined implant neck section) and thus allow maximum flexibility of the vertical implant position. Rounding of the apical geometry ensures gentle insertion of the CAMLOG® SCREW-LINE Implants into the bone, also near the maxillary sinus.

CAMLOG® SCREW-LINE Implants with screw-mounted insertion post can be used for template guided implant dentistry.

CAMLOG® SCREW-LINE Implants are equipped with the proven Tube-in-Tube® Implant-abutment connection and feature three symmetrically arranged angular grooves in the cylindrical part of the implant neck. The prosthetic restoration is performed with CAMLOG® Abutments, optionally also with components for Platform Switching.

Implant diameter



3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm

Implant lengths



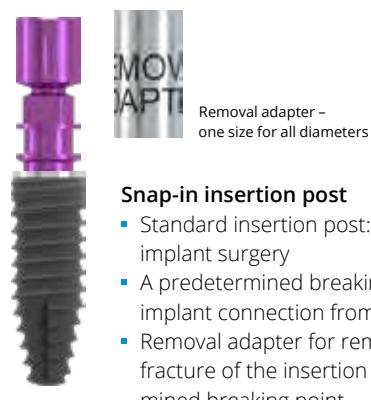
All CAMLOG® Implants are delivered pre-assembled in sterile packaging on a color-coded insertion post corresponding to the diameter. The option of Platform Switching may only be used with CAMLOG® Implants with K article numbers.



The insertion posts of the CAMLOG® Implants

The PROGRESSIVE-LINE and SCREW-LINE Implants are each offered with two different versions of the insertion post. Regardless of which option you choose, the instruments used to insert the implant are identical. A separate set of instruments for guided surgery is not required.

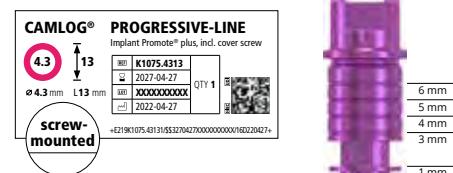
- Pre-assembled transfer part - simplified application and transfer to the patient's mouth
- Small diameter - easier access to the interdental spaces and posterior region
- Color-coded insertion post according to implant diameter - provides easy orientation during surgery
- Can be used as a paralleling pin - for aligning the position of multiple implants



Removal adapter –
one size for all diameters

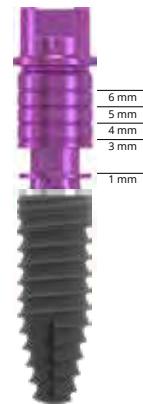
Snap-in insertion post

- Standard insertion post: easy removal following implant surgery
- A predetermined breaking point protects the implant connection from excessive loading
- Removal adapter for removing the implant after fracture of the insertion post at the predetermined breaking point



Screw-mounted insertion post

- For guided surgery
- Fixation to the implant using a screw: enables vertical adjustments of the implant position in the implant bed

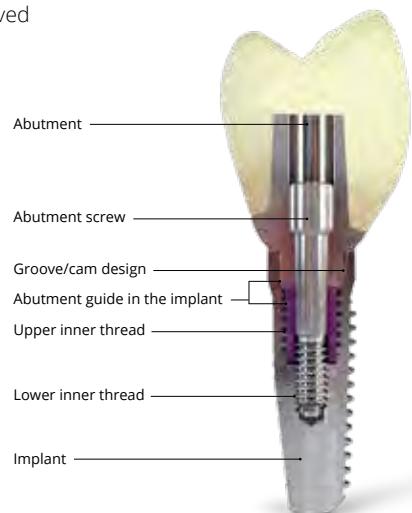


CAMLOG® Tube-in-Tube® Implant-abutment connection

The unmistakable Tube-in-Tube® principle with the three interlocking grooves and cams creates a very precise, stable, and antirotational implant-abutment-connection. This was designed biomechanically on the basis of complex finite element analyses. It has proven itself millions of times over for many years and its long-term success has been scientifically documented.

The CAMLOG® Tube-in-Tube® connection has undergone extensive scientific studies and achieved above average good results for precision fit.^{4,5*}

* see "Further documentation" on page 133



Advantages and benefits of the Tube-in-Tube® connection

- Easy indexing due to three possible positioning of the abutments
- Precision, with excellent tactile feedback
- Platform Matching and Platform Switching
- Defined vertical stop: no height offset across the entire workflow
- Scientifically documented long-term outcomes

For optimal positioning of the abutments, the implant should be aligned in the bone so that one of the three grooves points in vestibular direction. With the CAMLOG® Implants, the insertion tools include markings that correspond to the three grooves of the implant inner configuration.

CAMLOG® Prosthetic components

The CAMLOG® Implants can be provided with a wide range of flexible, anatomically adapted prosthetic components. CAMLOG® Abutments are color-coded according to the implant diameters.

CAMLOG® Abutments



Short cam geometry



The abutments are extended apically in tubular shape (5.4 mm) and include three short cams in the upper section that correspond to the three grooves in the implant.

When inserting the abutments, their tubular extension towards the apex affects the simple, easy and safe orientation in the longitudinal axis of the implant before the three cams lock into the grooves of the implant shoulder. The abutment is rotated until tactile engagement of the cams in the grooves of the implant. The abutment is then in the final position.

The implant-abutment connection of the CAMLOG® Implant System is a largely positive-locking connection. Connection with the cam geometry was optimally designed in terms of biomechanics by applying elaborate finite element analyses.

The image opposite displays the distribution of the von Mises stress in the implant-abutment connection in accordance with ISO 14801 at a load of 200 N.

CAMLOG® Healing caps

The various healing caps are used according to their indication for single and two-stage procedures. The CAMLOG® Healing caps are available in four geometries (cylindrical, wide body, wide body narrow and bottleneck). They are not anti-rotational and are screw-mounted in the upper inner thread of the implants.

Anatomical healing caps and (to prevent a collapse of the gingiva) form-congruent impression posts are available in two versions via our DEDICAM® CAD/CAM services:

1. Gingividual Concept Pro are individual PEEK healing caps and impression posts for patient-specific restorations.
2. Gingividual Concept Basic are prefabricated PEEK healing caps and impression posts in eight predefined tooth shapes.

For further information please go to:
www.camlog.com/en/products/cadcad



CAMLOG® impression taking

Impression taking of the CAMLOG® Implant is possible with impression posts, open or closed tray. The CAMLOG® Impression posts are color-coded according to the implant diameter and feature an emergence profile which corresponds to the shape of the healing caps and are supplied sterile. High-precision components ensure correct transfer of the intraoral situation. The antirotational mechanism is ensured by the CAMLOG® groove/cam geometry.



CAMLOG® Temporary abutments

Various abutments are available for the CAMLOG® Implant System for temporary prosthetic restorations. CAMLOG® Temporary abutments made of titanium alloy (Ti-6Al-4V ELI) are available in crown and bridge versions.

As an option, temporary restoration on CAMLOG® Implants can also be performed with temporary abutments made of PEEK (poly ether ether ketone). The abutments can be used in immediate implantations or after exposing the gingiva.

CAMLOG® Esthomic® Abutments

Anatomically preformed abutments allow for optimal stump design. The CAMLOG® Esthomic® Abutments are available both straight and angled with various gingival heights and with an oval anatomically pre-shaped shoulder profile. The angled Esthomic® Abutments are available in A and B versions differentiated by a cam offset of 60°. This results in six prosthetic-oriented rotating positions and allows perfect prosthetic alignment of the axes.



CAMLOG® Esthomic® Abutment cam alignment



Type A
Cam alignment
against the angle

Type B
Cam alignment in
direction of the angle



Type A

Type B
Cams with 60°
offset

CAMLOG® Titanium bases CAD/CAM and CAMLOG® Titanium bases CAD/CAM free

CAMLOG® Titanium bases CAD/CAM and CAMLOG® Titanium bases CAD/CAM free act as a bonding basis for customized, implant-supported dental restorations made of suitable materials. Reconstructions are fabricated with the aid of CAD/CAM techniques. CAMLOG® Titanium bases CAD/CAM are available in crown and bridge versions. CAMLOG® Titanium bases CAD/CAM free for the angled screw channel are available in the crown version in two chimney heights.





CAMLOG® Universal and telescope abutments

CAMLOG® Universal and telescope abutments can be used for individually fabricated cementable crown and bridge restorations and for double crown restorations. The abutments are made of titanium alloy and can be custom trimmed.

CAMLOG® Ball, ODSecure®, and straight Multi-unit abutments

Ball, ODSecure®, and straight Multi-unit abutments are available for the CAMLOG® Implant System. These differ from the abutments with a separate abutment screw through different connection designs to the implant. Ball, ODSecure® and straight Multi-unit abutments are manufactured as single units with a thread in the apical region which engages with the upper inner thread of the CAMLOG® Implant. These abutments are screwed into the CAMLOG® Implant using the corresponding insertion tools.



Example: CAMLOG® ODSecure® abutment (\varnothing 4.3 mm)
in a CAMLOG® PROGRESSIVE-LINE Implant

Platform Switching design

Platform Switching (PS) is used to support the hard and soft tissue in the peri-implant esthetic region. The distance between the implant-abutment interface and the alveolar crest is increased and thereby reduces the effect of inflammatory cell infiltration with concomitant bone resorption. The option of Platform Switching may only be used with CAMLOG® Implants with K article numbers.

When selecting the Platform Switching effect, the soft tissue is ideally prepared for an esthetic emergence profile by using the PS components in all treatment steps.

- CAMLOG® Healing caps PS, (cylindrical, wide body, bottleneck)
- CAMLOG® Impression posts PS, open and closed tray
- CAMLOG® Temporary abutments PS
- CAMLOG® Titanium bases CAD/CAM PS
- CAMLOG® Titanium bases CAD/CAM free PS
- CAMLOG® Esthomic® Abutments PS
- CAMLOG® Universal abutments PS



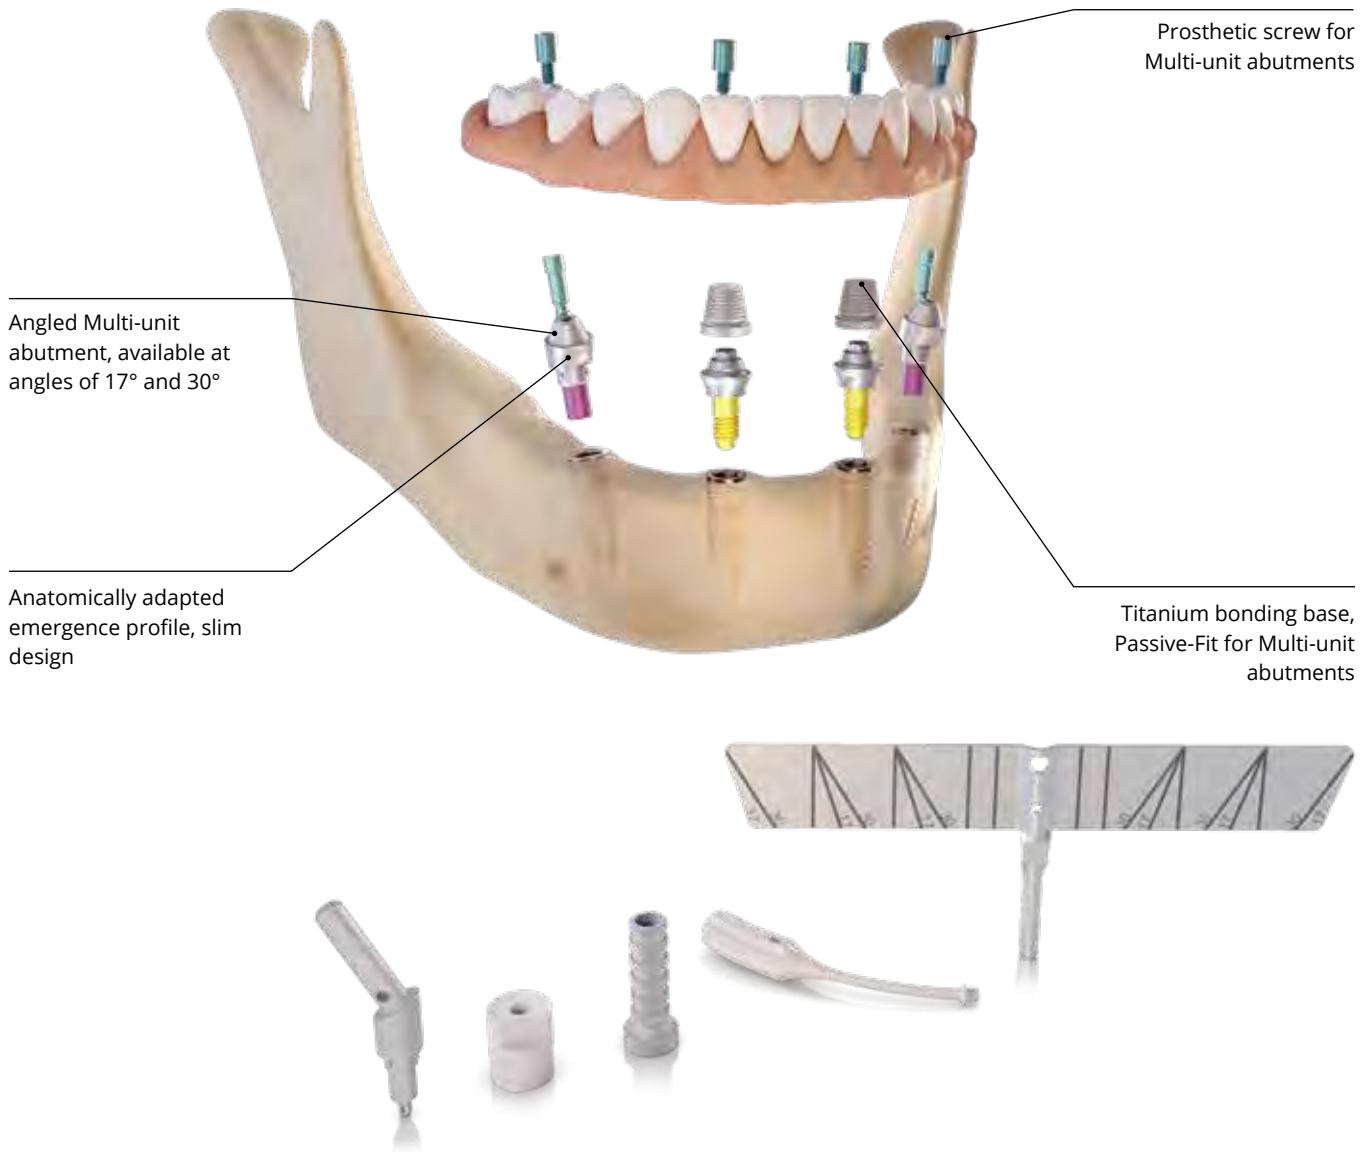
Multi-unit System

With the Multi-unit System, edentulous patients are given the option of comfortable fixed dentures based on four or six implants. The existing bone for the implant site can be optimally utilized by inserting the posterior implants at a 17° or 30° angle from distal to mesial. The distal emergence of the abutments creates a sufficiently large load polygon for a balanced support of the denture.

In addition to occlusally screw-retained bridges for temporary immediate and definitive late restorations, the Multi-unit system also allows for removable restorations on bars or ODSecure® Attachments. Single-piece straight as well as 17° and 30° angled

Multi-unit abutments are available in different gingival heights for this purpose – straight and 17° angled in 1, 2, 3, and 4 mm and 30° angled in 1, 2, and 3 mm – and in diameters of 3.3, 3.8, 4.3, and 5.0 mm. A carrier and a PEEK handle ensure easy placement of the Multi-unit abutments into the implant.

Depending on the prosthetic restoration concept selected, various components are available to the user: both adhesive or cast-on bases for temporary or final screw-retained restorations as well as a retentive abutment from the ODSecure® System. Thus, users always have the choice between conventional or digital workflows.



CAD/CAM Services

Individually CAD/CAM fabricated prosthetics, healing caps and impression posts, scanning and design services, 3D implant planning, printed drilling templates and jaw models are available from Camlog through our DEDICAM® Service Division.

Personal support with the accustomed competence of our employees as well as processes optimized right down to the finest detail ensure a high degree of certainty of results with the greatest possible individual freedom.

Extensive libraries for the open CAD systems from 3Shape, exocad and Dental Wings are available for implant-supported restorations.



DEDICAM®
DIGITAL CONCEPTS

Discover your options and start your digital future with DEDICAM®.

DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

For further information please go to: www.camlog.com/en/products/cadcams

Explanation of symbols

	CE-label
	CE-label with number of the Notified Body
	Consult instructions for use
	Caution, observe the warning notices
	Medical Device
	Article number
	Lot number
	Serial number
	Sterilized using irradiation
	Single sterile barrier system with protective packaging outside
	Single sterile barrier
	Non-sterile
	Date of manufacture
	Use-by date
	Do not resterilize
	Do not reuse
	Do not use if package is damaged
	Keep away from sunlight
	Temperature limit
	Manufacturer
	MR-safe*
	MR-conditional
	Contains hazardous substances
	Caution: US Federal law restricts this device to sale by or on the order of a dentist or physician.
	Store in a dry place

Explanation of abbreviations

\emptyset	Diameter
$A\emptyset$	Apical diameter
$G\emptyset$	Gingival diameter
$PP\emptyset$	Prosthetic platform diameter
L	Length
GH	Gingival height
PBT	Polybutylene terephthalate
$PEEK$	Poly ether ether ketone
POM	Polyoxymethylene
$PPSU$	Polyphenylsulfone
PS	Platform Switching

Color coding of the surgical and prosthetic CAMLOG® Products



General safety instructions and warnings

- The descriptions in this product catalog are not sufficient to allow immediate use of the CAMLOG® Implant System.
- Instruction by a surgeon experienced in using the CAMLOG® Implant System is strongly recommended. The products may only be used by dentists, physicians, surgeons and dental technicians. Appropriate courses and training sessions are offered by Camlog if required.
- Methodical errors made during the treatment can result in loss of the implant and significant loss of the peri-implant bone.
- The images in this document are for reference purposes only and may differ from the actual product.

* for non-metallic DEDICAM® Components

Packaging PROGRESSIVE-LINE Implants

Secondary packaging

Sealed, folding box with color-coded product label

Inner Implant packaging (primary packaging)

Sealed, color-coded



Example of product label for outer Implant packaging



Packaging SCREW-LINE Implants

Secondary packaging

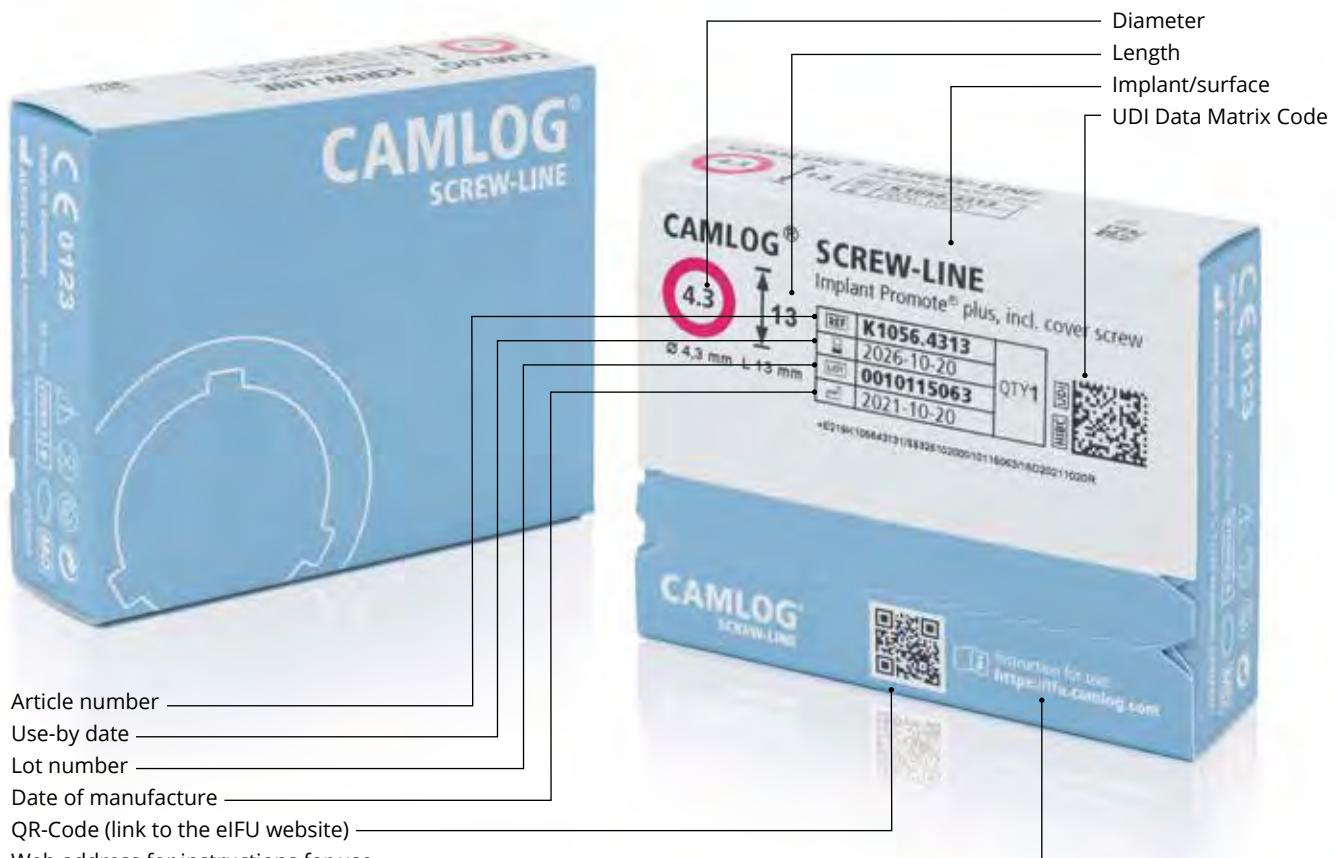
Sealed, folding box with color-coded product label

Inner Implant packaging (primary packaging)

Sealed, color-coded



Example of product label for outer Implant packaging



Packaging units: unless described otherwise, each pack contains one product.



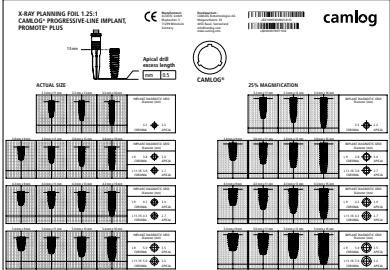
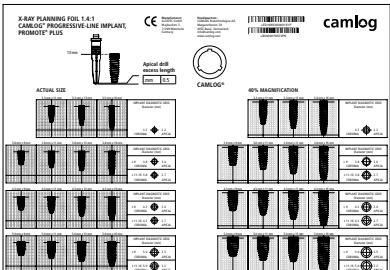
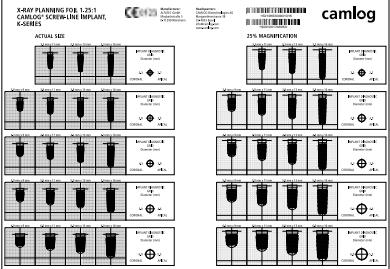
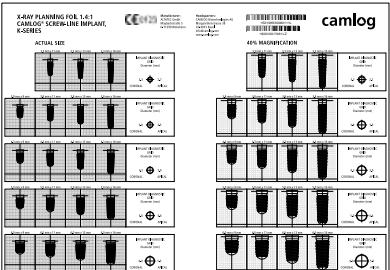
Direct part marking – better identification and traceability

In future, all Camlog instruments will feature a label with the lot number and/or UDI code in addition to the article number. This makes it easier for the entire practice team to identify and assign the products. The product images contained in the catalog do not yet always reflect this specification.

Surgery



Implant planning

	Article	Art. No.
	X-Ray planning foil 1.25:1 CAMLOG® PROGRESSIVE-LINE Implants Magnification 25%	K5300.9014
	X-Ray planning foil 1.4:1 CAMLOG® PROGRESSIVE-LINE Implants Magnification 40%	K5300.9015
	X-Ray planning foil 1.25:1 CAMLOG® SCREW-LINE Implants Magnification 25%	K5300.9010
	X-Ray planning foil 1.4:1 CAMLOG® SCREW-LINE Implants Magnification 40%	K5300.9011

CT-Planning

	Article	Quantity	Art. No.	\emptyset	L
	CT-tube for drill Ø 2.0 mm*, corrugated tube internal diameter 2.1 mm external diameter 2.5 mm Material Titanium alloy	10	A2002.2000	-	4.0 mm 10.0 mm
	CT-tube for drill Ø 2.2 mm, corrugated tube internal diameter 2.3 mm external diameter 2.7 mm Material Titanium alloy	10	A2222.2200	-	4.0 mm 10.0 mm
	Drill for placing corrugated CT-tubes (for A2002.2000) Material Stainless steel	1	A2050.2600	2.6 mm	-
	Drill for placing corrugated CT-tubes (for A2222.2200) Material Stainless steel	1	A2050.2800	2.8 mm	-

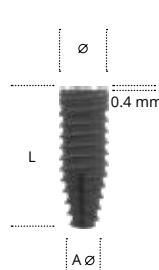
* for pilot drills J5051.2003 and pilot drills SCREW-LINE J5051.2000

PROGRESSIVE-LINE

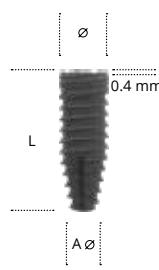


PROGRESSIVE-LINE

Implants with snap-in insertion post

	Article	Art. No.	\emptyset	L	A \emptyset
	CAMLOG® PROGRESSIVE-LINE Implant, Promote® plus incl. snap-in insertion post and cover screw, sterile Material Titanium Grade 4	K1076.3311	3.8 mm	11 mm	2.2 mm
		K1076.3313		13 mm	
		K1076.3316		16 mm	
		K1076.3809	3.8 mm	9 mm	3.0 mm
		K1076.3811		11 mm	2.7 mm
		K1076.3813		13 mm	
		K1076.3816		16 mm	
		K1076.4309	4.3 mm	9 mm	3.0 mm
		K1076.4311		11 mm	2.7 mm
		K1076.4313		13 mm	
		K1076.4316		16 mm	
		K1076.5009	5.0 mm	9 mm	3.5 mm
		K1076.5011		11 mm	3.2 mm
		K1076.5013		13 mm	
		K1076.5016		16 mm	

Implants with screw-mounted insertion post

	Article	Art. No.	\emptyset	L	A \emptyset
	CAMLOG® PROGRESSIVE-LINE Implant, Promote® plus incl. screw-mounted insertion post and cover screw, sterile Material Titanium Grade 4	K1075.3311	3.8 mm	11 mm	2.2 mm
		K1075.3313		13 mm	
		K1075.3316		16 mm	
		K1075.3809	3.8 mm	9 mm	3.0 mm
		K1075.3811		11 mm	2.7 mm
		K1075.3813		13 mm	
		K1075.3816		16 mm	
		K1075.4309	4.3 mm	9 mm	3.0 mm
		K1075.4311		11 mm	2.7 mm
		K1075.4313		13 mm	
		K1075.4316		16 mm	
		K1075.5009	5.0 mm	9 mm	3.5 mm
		K1075.5011		11 mm	3.2 mm
		K1075.5013		13 mm	
		K1075.5016		16 mm	

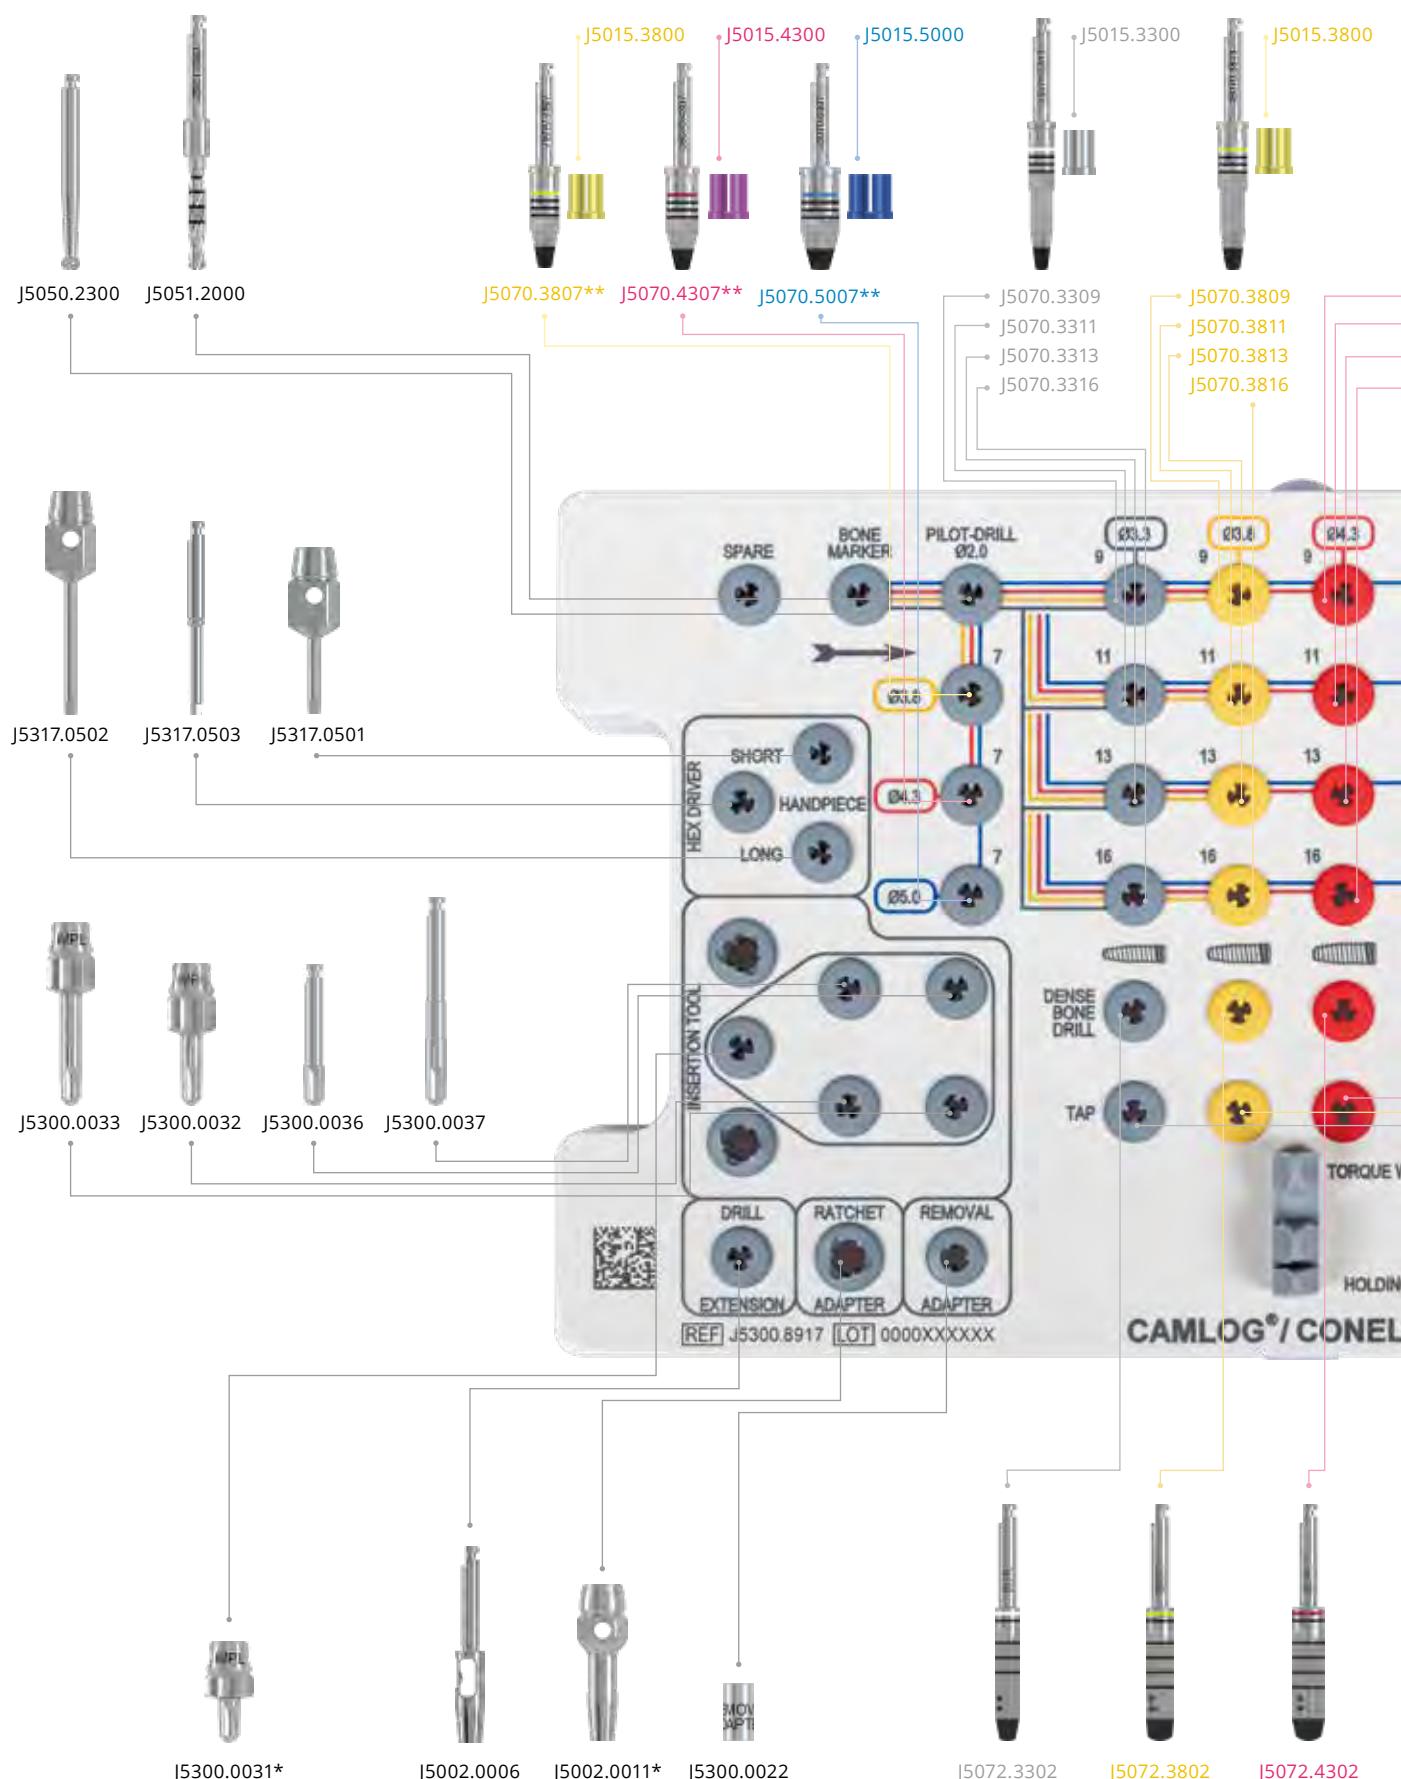
With CAMLOG® PROGRESSIVE-LINE Implants with the diameters 3.8/4.3/5.0 mm, the option of Platform Switching is possible.

Note

Implants with the screw-mounted insertion post (Art. No. K1075.xxxx) are to be used for template-guided implant placement with the PROGRESSIVE-LINE Guide System.

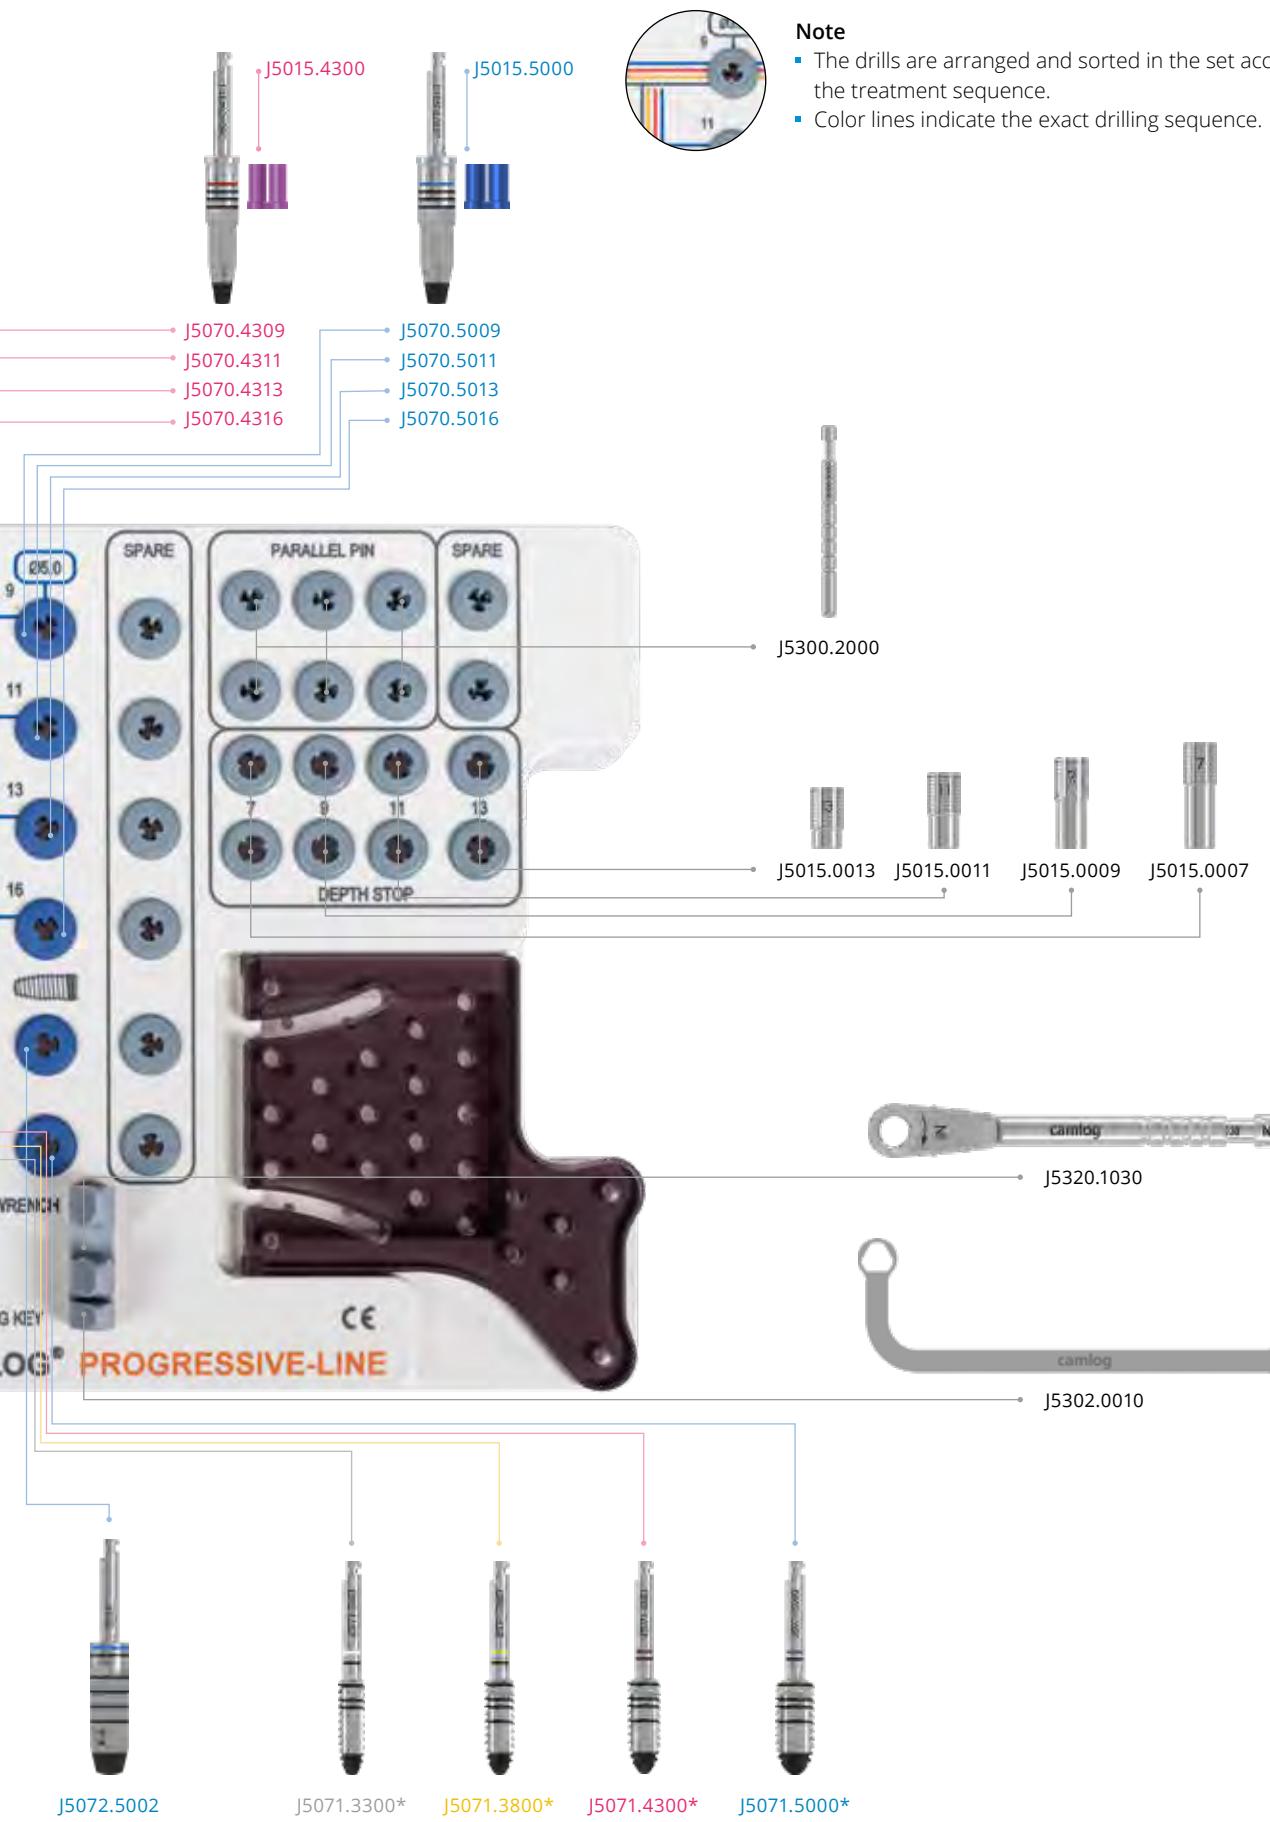
PROGRESSIVE-LINE

Surgery set CAMLOG®/CONELOG®



* These articles are not included in the surgery set and must be ordered separately.

** only for CONELOG® PROGRESSIVE-LINE Implants length 7 mm

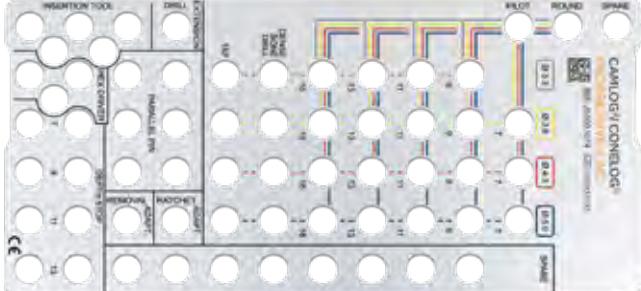


Note

- The drills are arranged and sorted in the set according to the treatment sequence.
- Color lines indicate the exact drilling sequence.

PROGRESSIVE-LINE

Surgery set and wash tray

	Article	Art. No.
	<p>Surgery set CAMLOG®/CONELOG® PROGRESSIVE-LINE contains all necessary surgical instruments sorted by color code, incl. torque wrench and holding key for insertion post (taps are not included)</p>	J5300.0075
	<p>Surgery wash tray CAMLOG®/CONELOG® PROGRESSIVE-LINE incl. steel pattern, without content</p>	J5300.8970
	<p>Steel pattern for surgery wash tray CAMLOG®/CONELOG® PROGRESSIVE-LINE</p> <p>Material Stainless steel</p>	J5300.1074

Preparation of the implant bed for CAMLOG® PROGRESSIVE-LINE Implants and for CONELOG® PROGRESSIVE-LINE Implants is performed with identical instruments.

Surgical instruments

	Article	Art. No.	\emptyset	L
	Form drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5070.3309	3.3 mm	9 mm
		J5070.3311		11 mm
		J5070.3313		13 mm
		J5070.3316		16 mm
		J5070.3809	3.8 mm	9 mm
		J5070.3811		11 mm
		J5070.3813		13 mm
		J5070.3816		16 mm
		J5070.4309	4.3 mm	9 mm
		J5070.4311		11 mm
		J5070.4313		13 mm
		J5070.4316		16 mm
		J5070.5009	5.0 mm	9 mm
		J5070.5011		11 mm
		J5070.5013		13 mm
		J5070.5016		16 mm
	Depth stop for form drills SCREW-LINE (can also be used for form drills PROGRESSIVE-LINE), resterilizable Material Titanium alloy	J5015.3300	3.3 mm	-
		J5015.3800	3.8 mm	
		J5015.4300	4.3 mm	
		J5015.5000	5.0 mm	
	Dense bone drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5072.3300	3.3 mm	-
		J5072.3800	3.8 mm	
		J5072.4300	4.3 mm	
		J5072.5000	5.0 mm	
	Dense bone drill 2 PROGRESSIVE-LINE resterilizable Material Stainless steel	J5072.3302	3.3 mm	-
		J5072.3802	3.8 mm	
		J5072.4302	4.3 mm	
		J5072.5002	5.0 mm	
	Tap PROGRESSIVE-LINE resterilizable Material Stainless steel	J5071.3300	3.3 mm	-
		J5071.3800	3.8 mm	
		J5071.4300	4.3 mm	
		J5071.5000	5.0 mm	
	Paralleling pin with depth marks (for pilot drilling Ø 2.0 mm) Material Titanium alloy	J5300.2000	-	-

PROGRESSIVE-LINE

Guide System

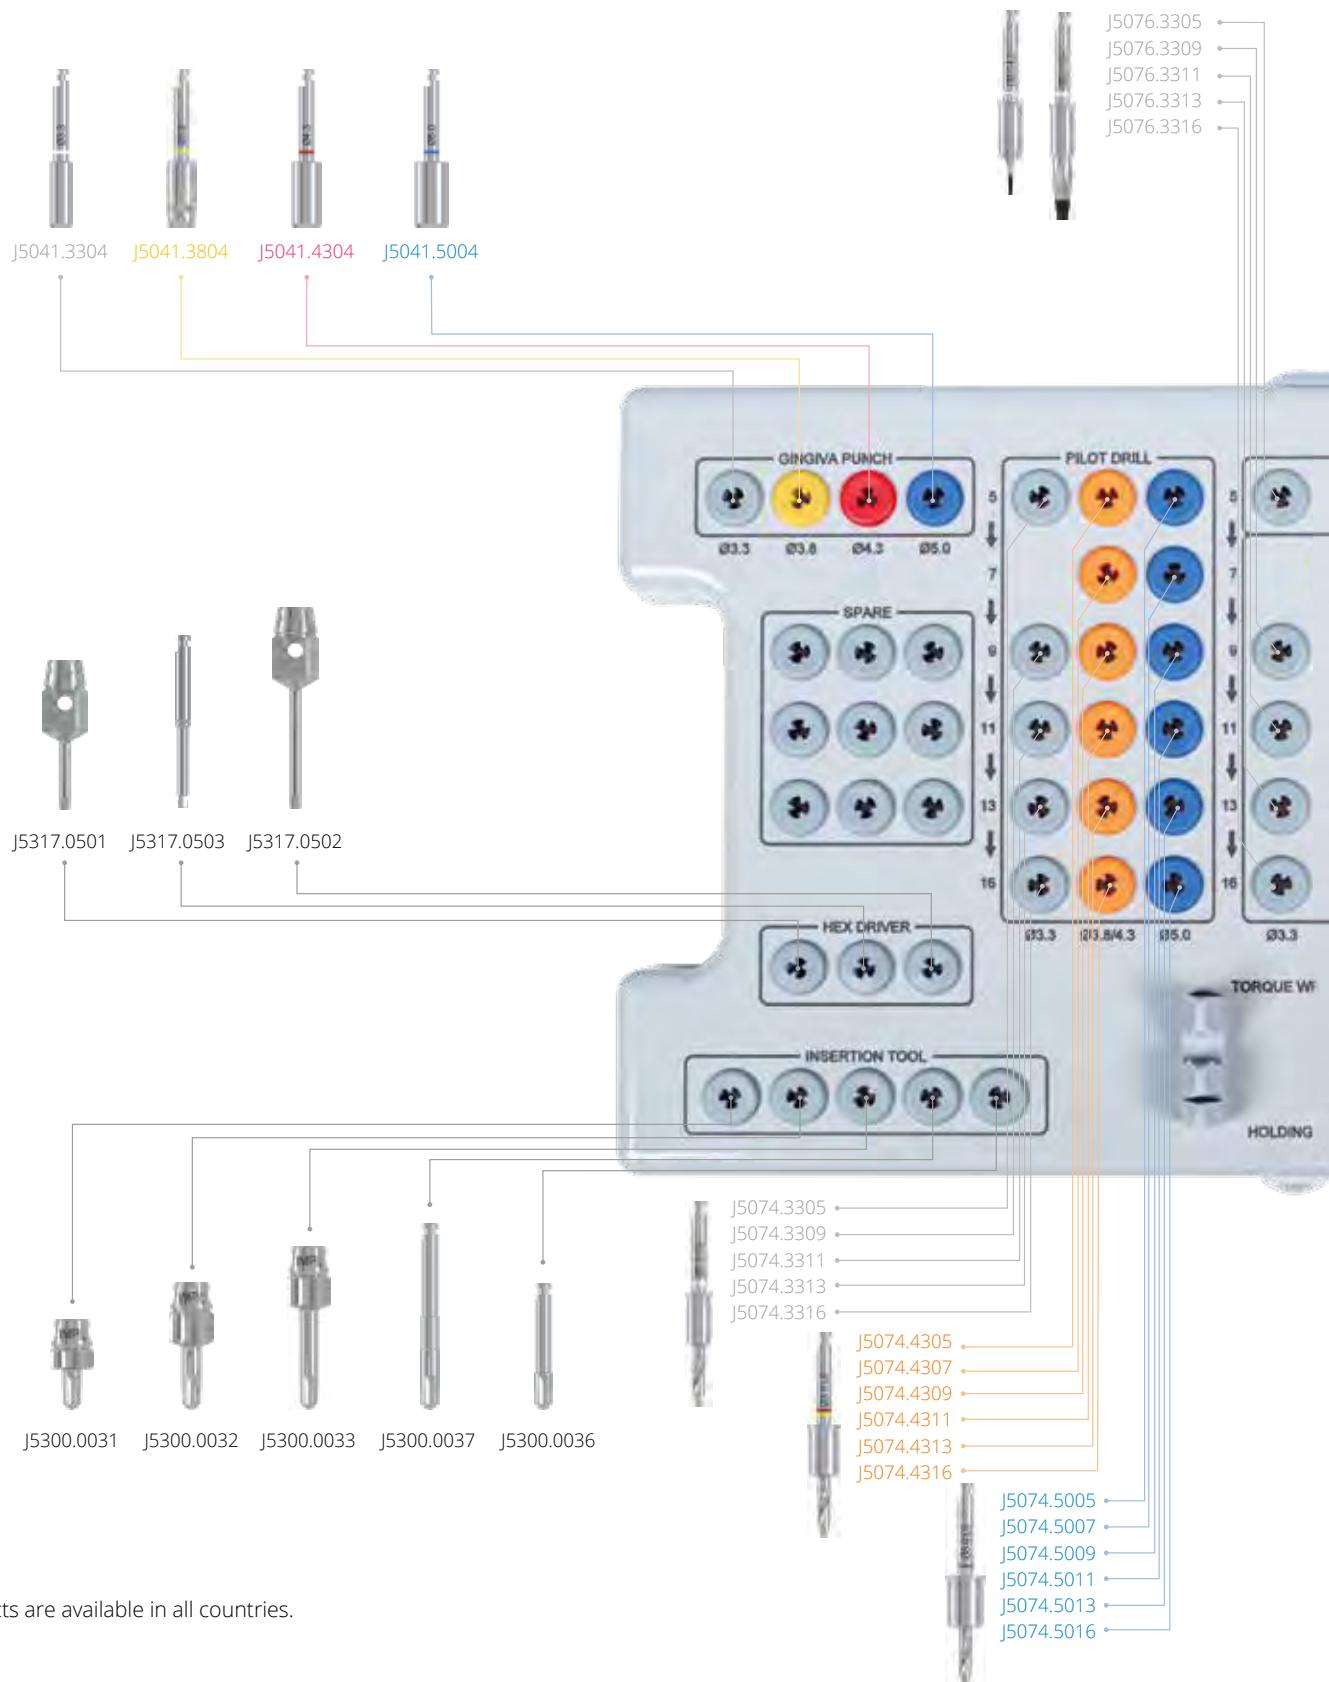


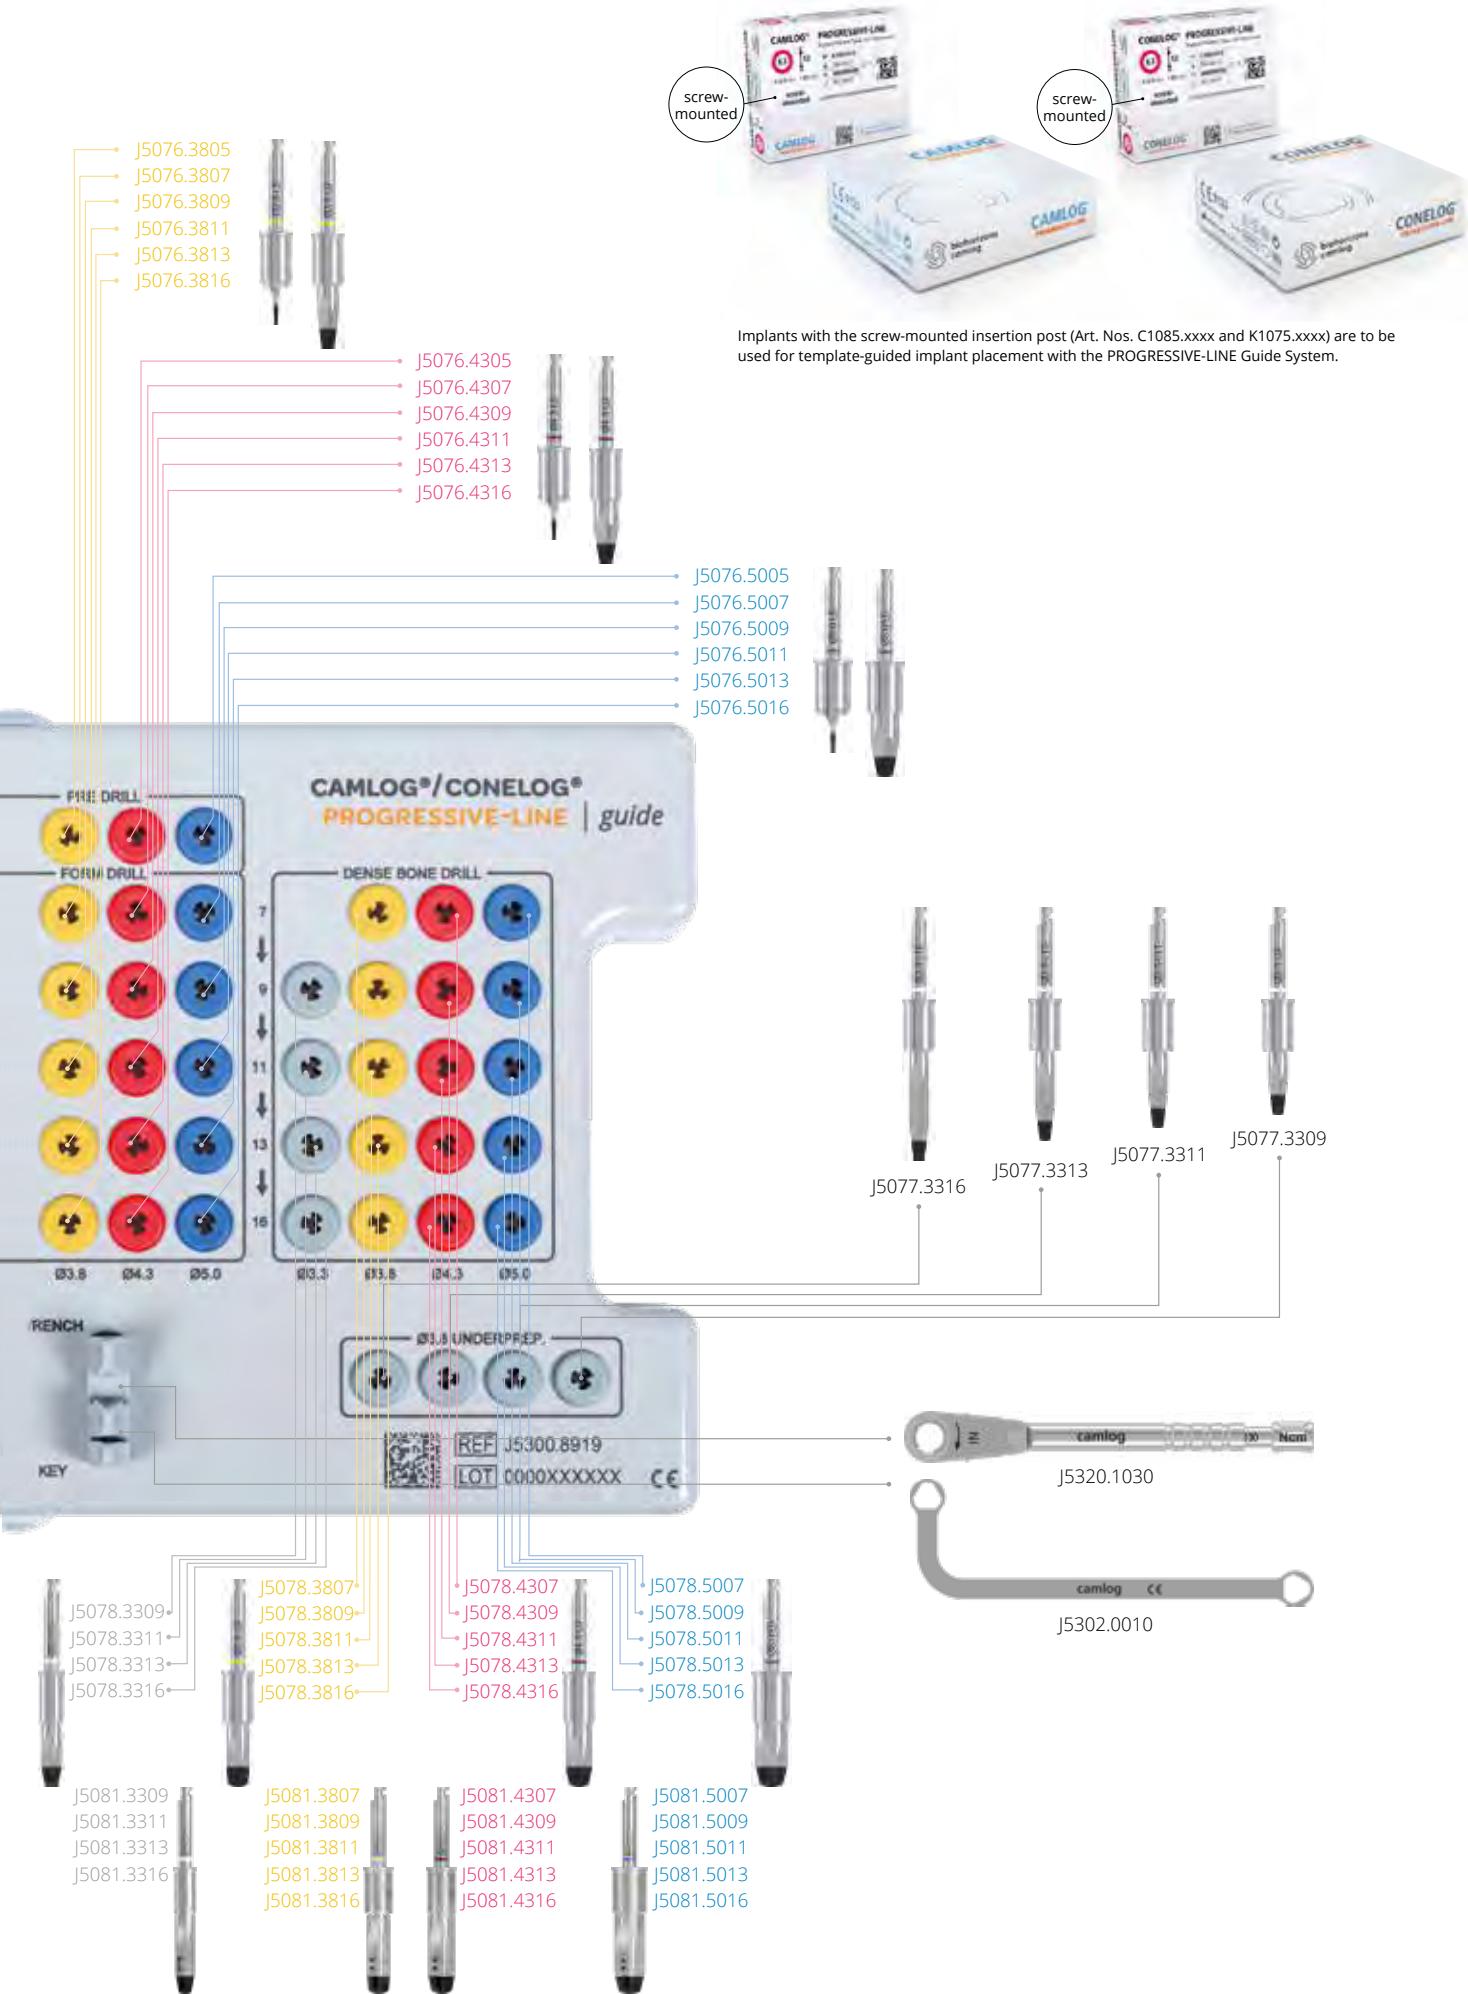


3D implant planning, creation of drilling template designs and drilling templates are available from our CAD/CAM DEDICAM® Service Division. DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

PROGRESSIVE-LINE Guide System

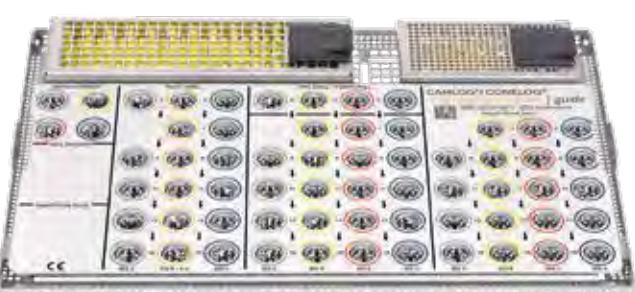
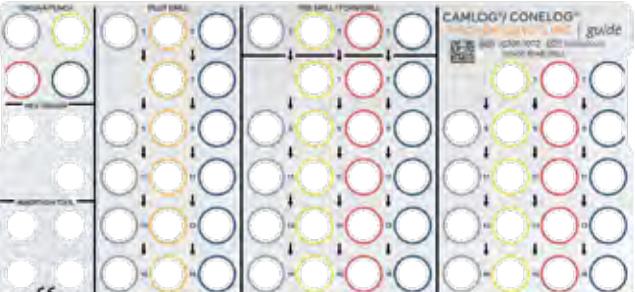
Surgery tray CAMLOG®/CONELOG®





PROGRESSIVE-LINE Guide System

Surgery and wash tray

	Article	Art. No.
	Guide System Surgery tray CAMLOG®/CONELOG® PROGRESSIVE-LINE without content	J5300.8919
	Guide System Surgery wash tray CAMLOG®/CONELOG® PROGRESSIVE-LINE incl. steel pattern, without content	J5300.8971
	Guide System Steel pattern for surgery wash tray CAMLOG®/CONELOG® PROGRESSIVE-LINE Material Stainless steel	J5300.1072

Note

Implants with the screw-mounted insertion post (Art. No. K1075.xxxx) are to be used for template-guided implant placement with the PROGRESSIVE-LINE Guide System.

Surgical instruments

	Article	Art. No.	Ø	L
	Guide System Gingiva punch PROGRESSIVE-LINE resterilizable	J5041.3304	3.3 mm	
		J5041.3804	3.8 mm	
		J5041.4304	4.3 mm	
	Material Stainless steel	J5041.5004	5.0 mm	
		J5074.3305		5 mm
		J5074.3309		9 mm
		J5074.3311		11 mm
		J5074.3313		13 mm
		J5074.3316		16 mm
	Guide System Pilot drill PROGRESSIVE-LINE resterilizable	J5074.4305	3.8 mm	5 mm
		J5074.4307		7 mm
		J5074.4309		9 mm
		J5074.4311		11 mm
		J5074.4313		13 mm
		J5074.4316		16 mm
	Material Stainless steel	J5074.5005		5 mm
		J5074.5007		7 mm
		J5074.5009		9 mm
		J5074.5011		11 mm
		J5074.5013		13 mm
		J5074.5016		16 mm
	Guide System Pre-drill PROGRESSIVE-LINE resterilizable	J5076.3305	3.3 mm	
		J5076.3805	3.8 mm	
		J5076.4305	4.3 mm	
	Material Stainless steel	J5076.5005	5.0 mm	
		J5076.3309		9 mm
		J5076.3311		11 mm
		J5076.3313		13 mm
		J5076.3316		16 mm
	Guide System Form drill PROGRESSIVE-LINE resterilizable	J5076.3809		9 mm
		J5076.3811		11 mm
		J5076.3813		13 mm
		J5076.3816		16 mm
	Material Stainless steel	J5076.4309		9 mm
		J5076.4311		11 mm
		J5076.4313		13 mm
		J5076.4316		16 mm
		J5076.5009		9 mm
		J5076.5011		11 mm
		J5076.5013		13 mm
		J5076.5016		16 mm

PROGRESSIVE-LINE Guide System

Surgical instruments

	Article	Art. No.	Ø	L
	Guide System dense bone drill PROGRESSIVE-LINE resterilizable Material Stainless steel	J5078.3309	3.3 mm	9 mm
		J5078.3311		11 mm
		J5078.3313		13 mm
		J5078.3316		16 mm
		J5078.3809	3.8 mm	9 mm
		J5078.3811		11 mm
		J5078.3813		13 mm
		J5078.3816		16 mm
		J5078.4309	4.3 mm	9 mm
		J5078.4311		11 mm
		J5078.4313		13 mm
		J5078.4316		16 mm
		J5078.5009	5.0 mm	9 mm
		J5078.5011		11 mm
		J5078.5013		13 mm
		J5078.5016		16 mm
	Guide System dense bone drill 2 PROGRESSIVE-LINE resterilizable Material Stainless steel	J5081.3309	3.3 mm	9 mm
		J5081.3311		11 mm
		J5081.3313		13 mm
		J5081.3316		16 mm
		J5081.3809	3.8 mm	9 mm
		J5081.3811		11 mm
		J5081.3813		13 mm
		J5081.3816		16 mm
		J5081.4309	4.3 mm	9 mm
		J5081.4311		11 mm
		J5081.4313		13 mm
		J5081.4316		16 mm
		J5081.5009	5.0 mm	9 mm
		J5081.5011		11 mm
		J5081.5013		13 mm
		J5081.5016		16 mm
	Guide System Form drill for Ø 3.8 mm under preparation PROGRESSIVE-LINE resterilizable Material Stainless steel	J5077.3309	3.3 mm	9 mm
		J5077.3311		11 mm
		J5077.3313		13 mm
		J5077.3316		16 mm
		J3754.3301*	3.3 mm	-
	Guide System Guiding sleeve PROGRESSIVE-LINE 2 units Material Titanium alloy	J3754.3801*	3.8 mm	
		J3754.4301*	4.3 mm	
		J3754.5001*	5.0 mm	

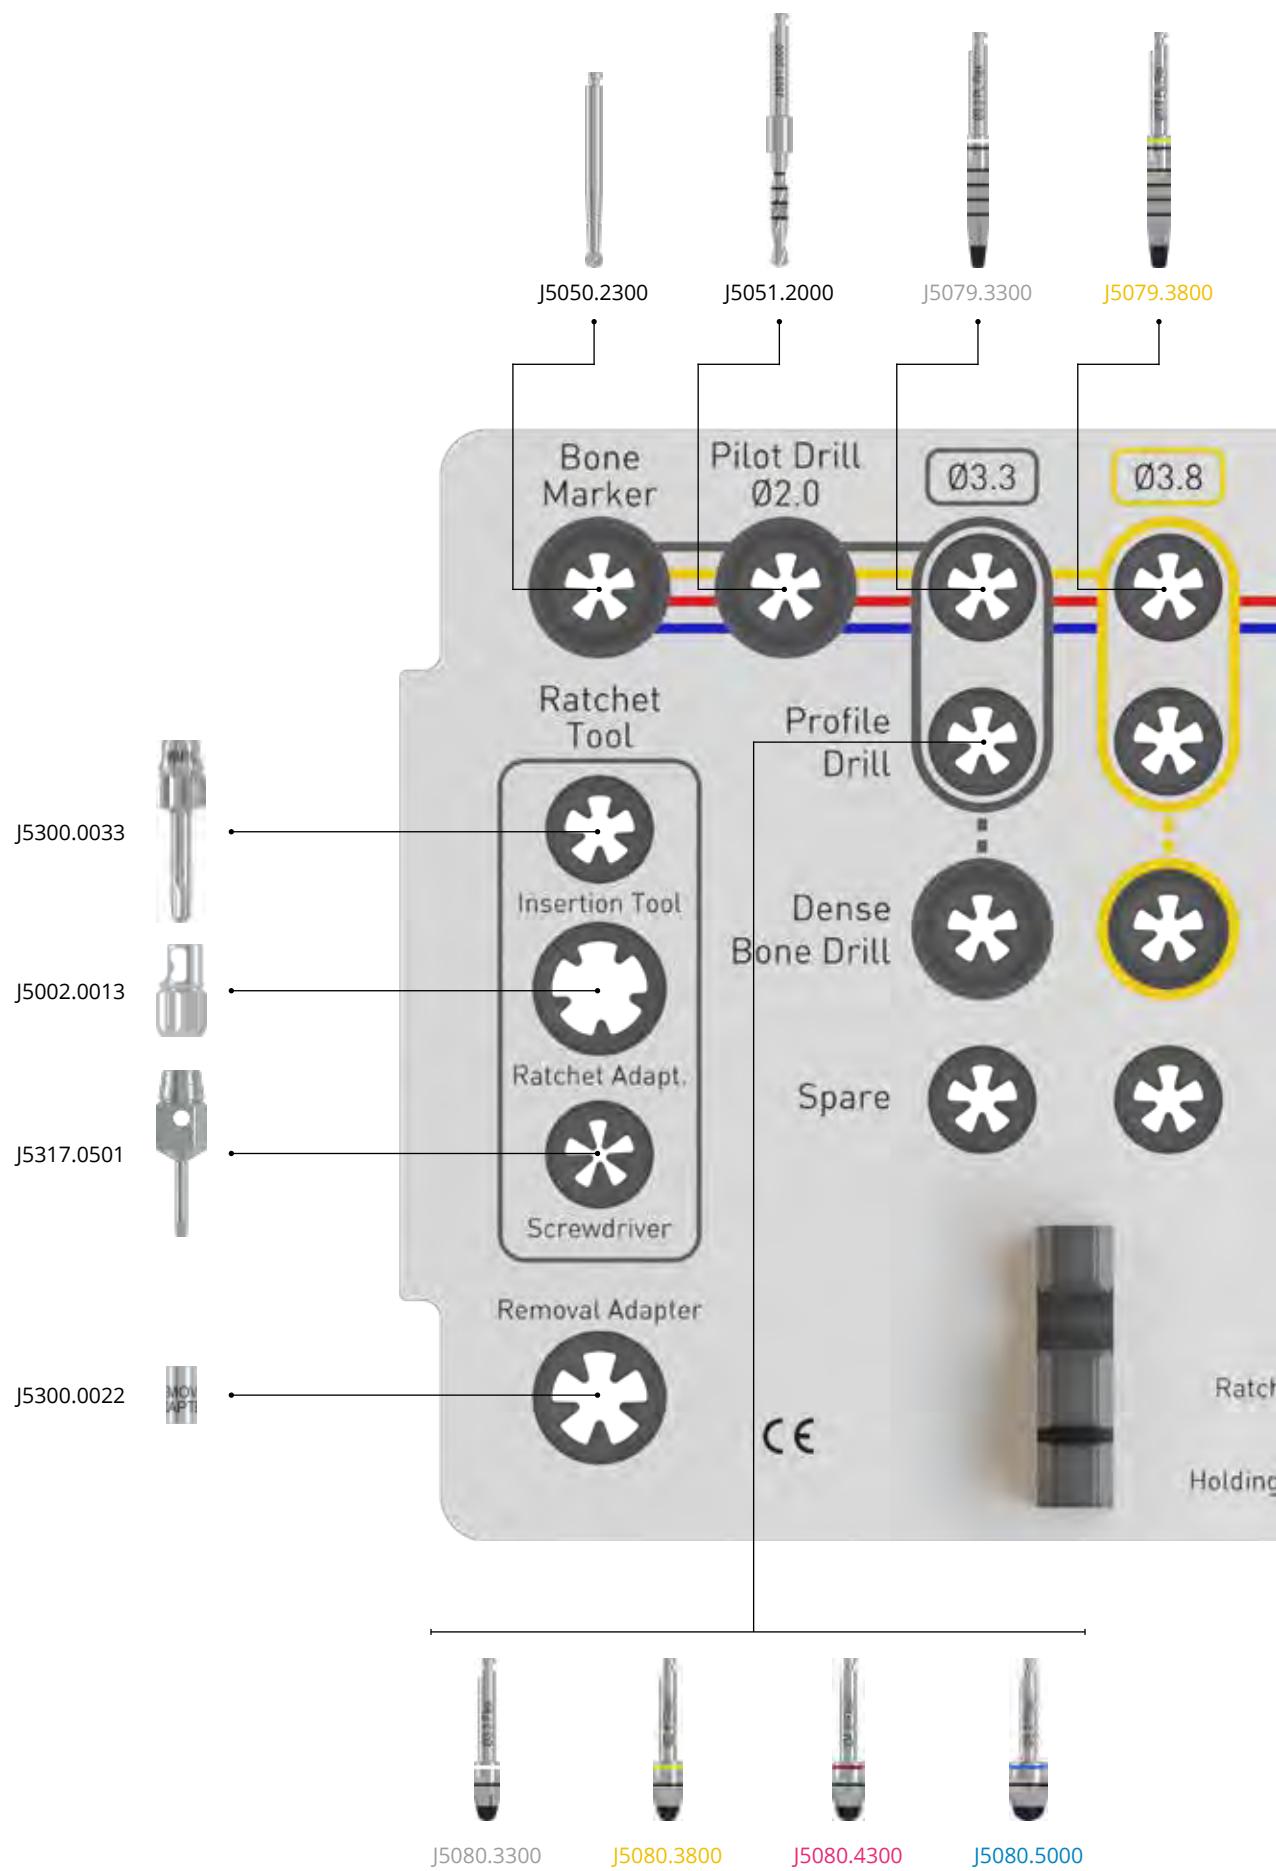
* The sleeves are not compatible with the SCREW-LINE Guide System.

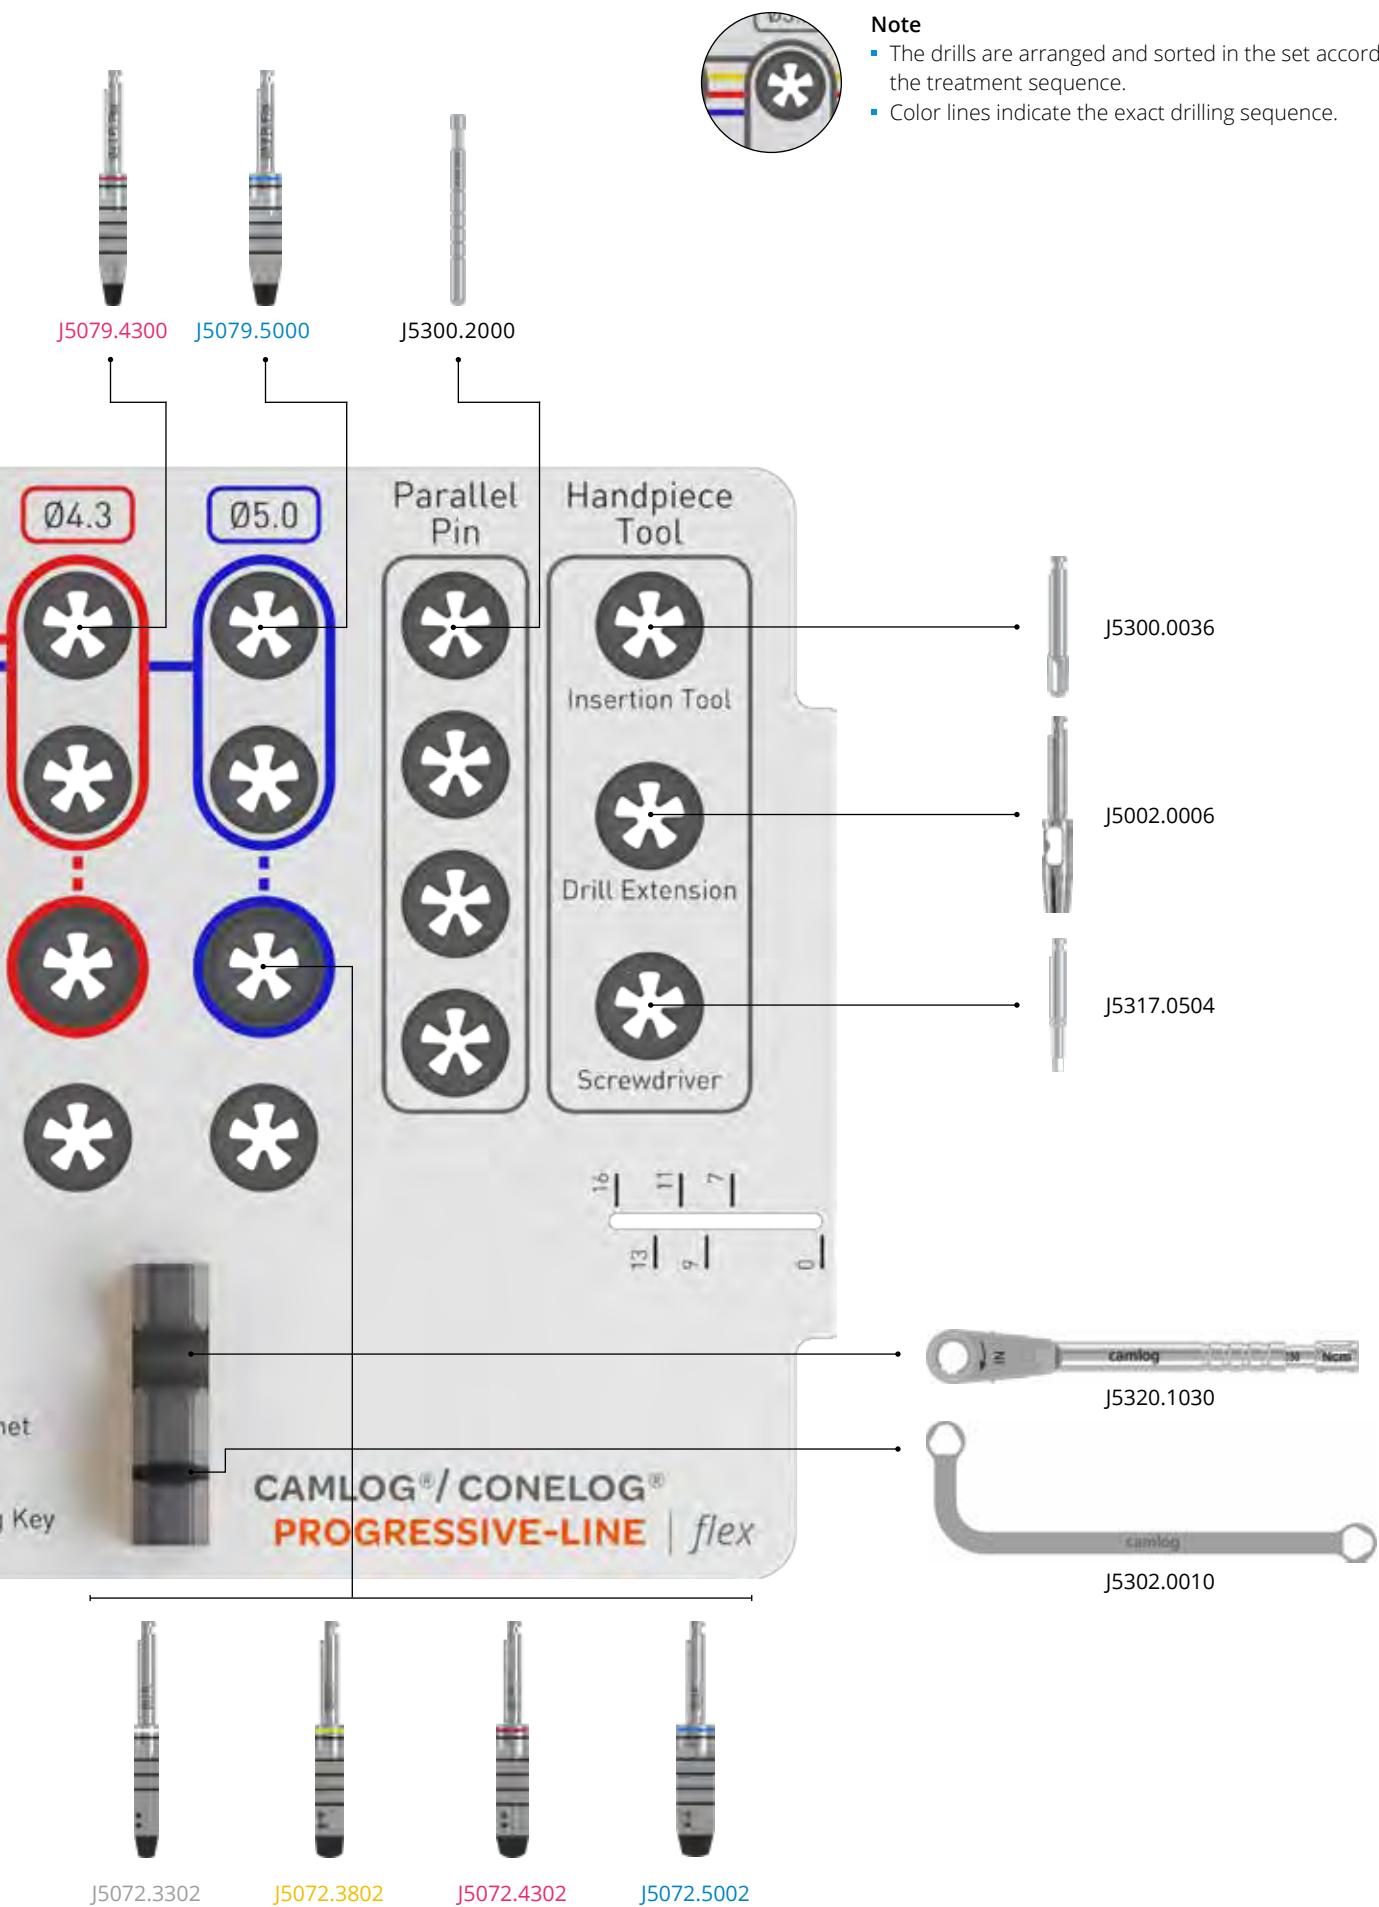
PROGRESSIVE-LINE Flex



PROGRESSIVE-LINE Flex

Surgery set CAMLOG®/CONELOG®





PROGRESSIVE-LINE Flex

Surgery set

	Article	Art. No.
	<p>Surgery set CAMLOG®/CONELOG® PROGRESSIVE-LINE Flex contains all necessary surgical instruments sorted by color code, incl. torque wrench and holding key for insertion post</p>	J5300.0081

Surgical instruments

	Article	Art. No.	Ø
	Drill PROGRESSIVE-LINE Flex resterilizable	J5079.3300	3.3 mm
	Material Stainless steel	J5079.3800	3.8 mm
		J5079.4300	4.3 mm
		J5079.5000	5.0 mm
	Profile drill PROGRESSIVE-LINE Flex resterilizable	J5080.3300	3.3 mm
	Material Stainless steel	J5080.3800	3.8 mm
		J5080.4300	4.3 mm
		J5080.5000	5.0 mm
	Dense bone drill PROGRESSIVE-LINE resterilizable	J5072.3300	3.3 mm
	Material Stainless steel	J5072.3800	3.8 mm
		J5072.4300	4.3 mm
		J5072.5000	5.0 mm
	Dense bone drill 2 PROGRESSIVE-LINE resterilizable	J5072.3302	3.3 mm
	Material Stainless steel	J5072.3802	3.8 mm
		J5072.4302	4.3 mm
		J5072.5002	5.0 mm
	Tap PROGRESSIVE-LINE resterilizable	J5071.3300	3.3 mm
	Material Stainless steel	J5071.3800	3.8 mm
		J5071.4300	4.3 mm
		J5071.5000	5.0 mm
	Paralleling pin with depth marks (for pilot drilling Ø 2.0 mm)	J5300.2000	-
	Material Titanium alloy		

SCREW-LINE




SCREW-LINE

Implants with snap-in insertion post

Article	Art. No.	\emptyset	L	A \emptyset
 <p>CAMLOG® SCREW-LINE Implant, Promote® incl. snap-in insertion post and cover screw, sterile</p> <p>Material Titanium Grade 4</p>	K1046.3311	3.3 mm	11 mm	2.7 mm
	K1046.3313		13 mm	
	K1046.3316		16 mm	
	K1046.3809	3.8 mm	9 mm	3.5 mm
	K1046.3811		11 mm	
	K1046.3813		13 mm	
	K1046.3816		16 mm	
	K1046.4309	4.3 mm	9 mm	3.9 mm
	K1046.4311		11 mm	
	K1046.4313		13 mm	
	K1046.4316		16 mm	
	K1046.5009	5.0 mm	9 mm	4.6 mm
	K1046.5011		11 mm	
	K1046.5013		13 mm	
	K1046.5016		16 mm	
	K1046.6009	6.0 mm	9 mm	5.5 mm
	K1046.6011		11 mm	
	K1046.6013		13 mm	
	K1046.6016		16 mm	
 <p>CAMLOG® SCREW-LINE Implant, Promote® plus incl. snap-in insertion post and cover screw, sterile</p> <p>Material Titanium Grade 4</p>	K1056.3311	3.3 mm	11 mm	2.7 mm
	K1056.3313		13 mm	
	K1056.3316		16 mm	
	K1056.3809	3.8 mm	9 mm	3.5 mm
	K1056.3811		11 mm	
	K1056.3813		13 mm	
	K1056.3816		16 mm	
	K1056.4309	4.3 mm	9 mm	3.9 mm
	K1056.4311		11 mm	
	K1056.4313		13 mm	
	K1056.4316		16 mm	
	K1056.5009	5.0 mm	9 mm	4.6 mm
	K1056.5011		11 mm	
	K1056.5013		13 mm	
	K1056.5016		16 mm	
	K1056.6009	6.0 mm	9 mm	5.5 mm
	K1056.6011		11 mm	
	K1056.6013		13 mm	
	K1056.6016		16 mm	

Implants with screw-mounted insertion post

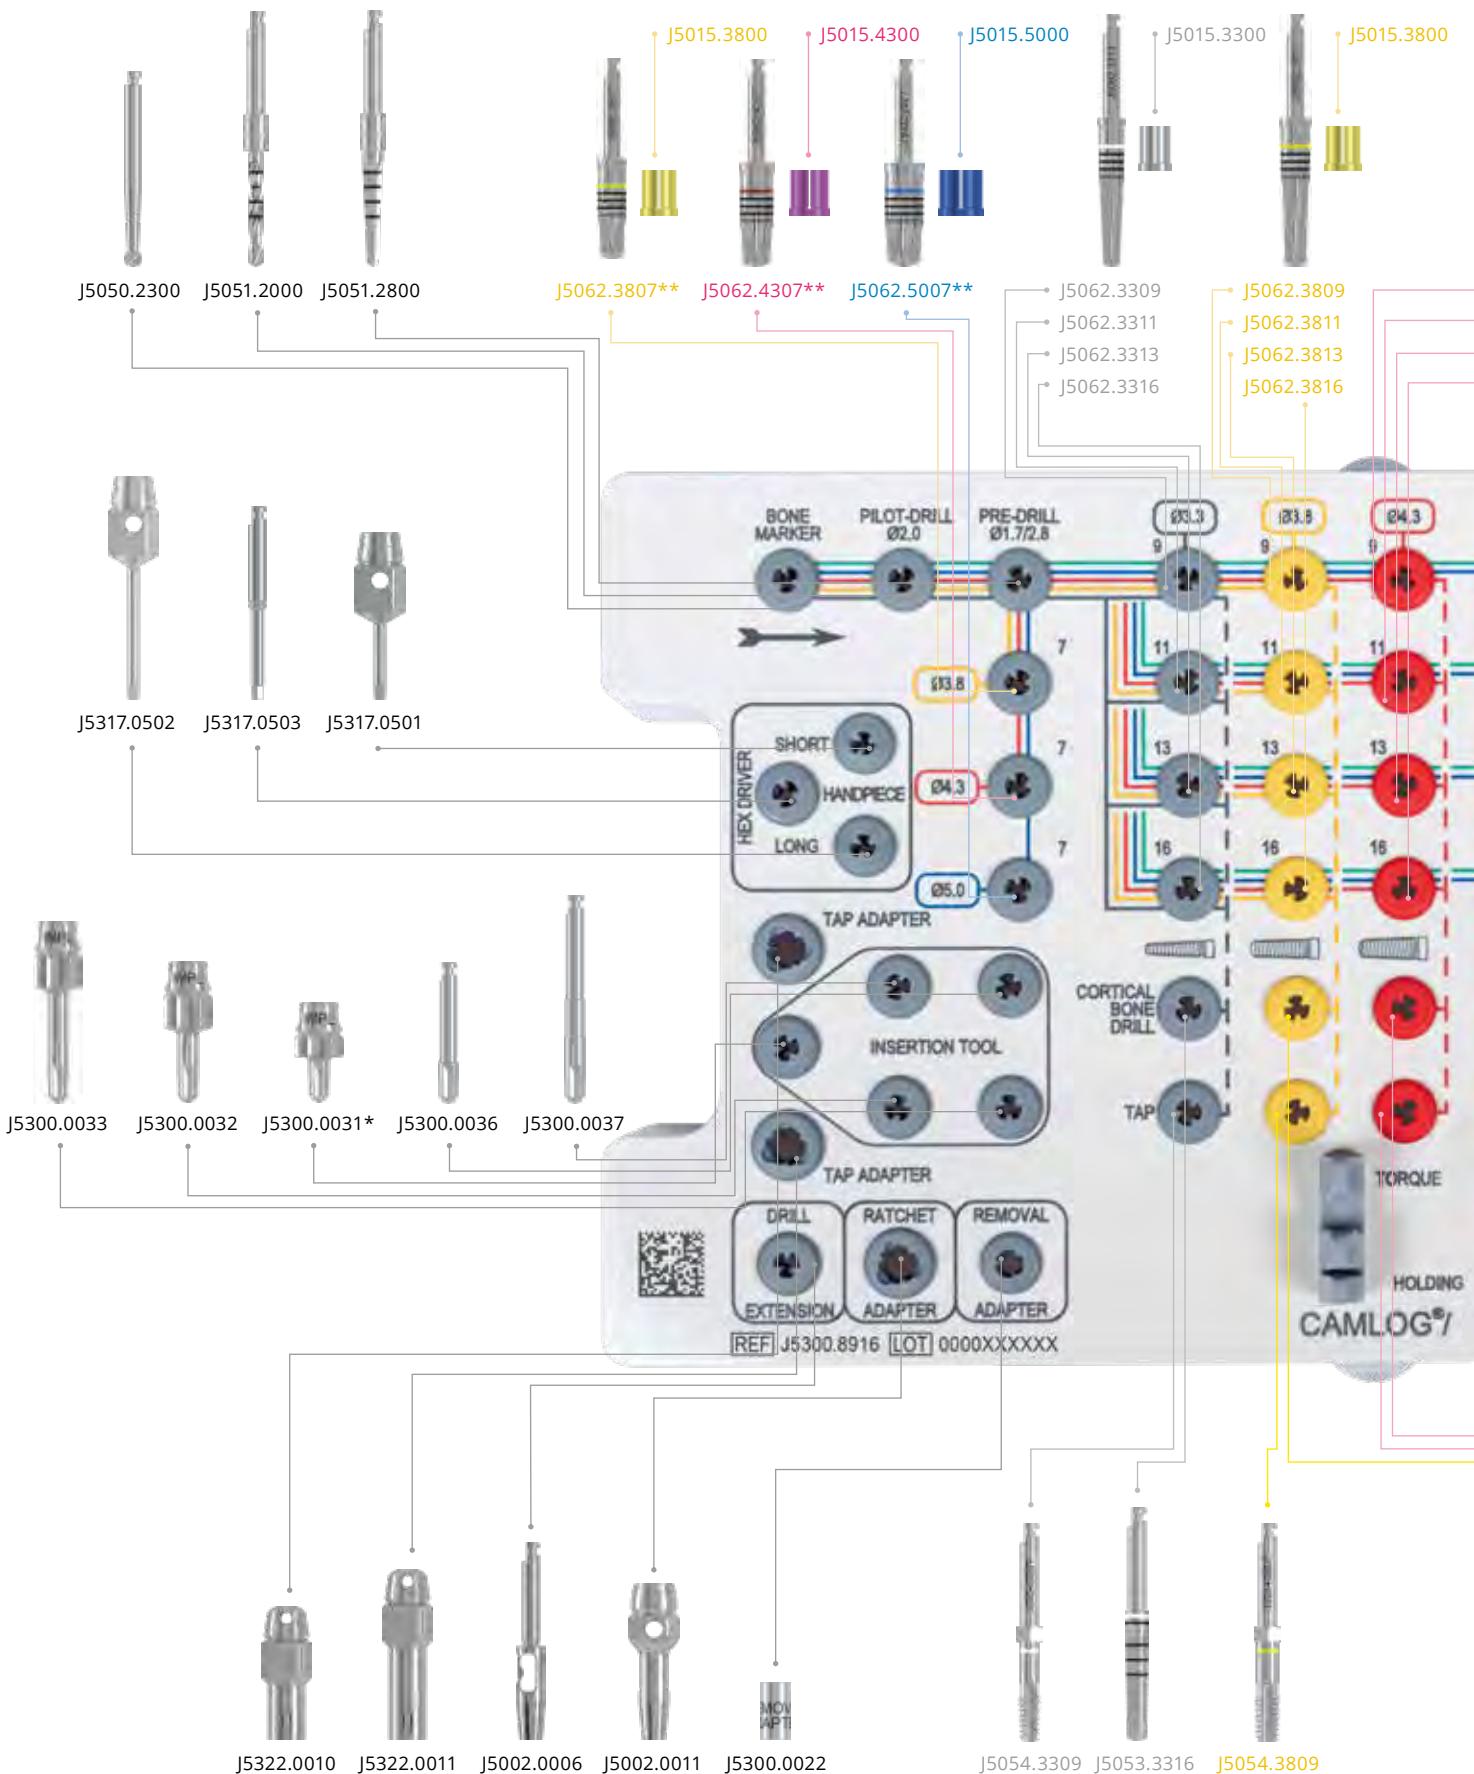
	Article	Art. No.	\emptyset	L	A \emptyset		
 <p>CAMLOG® SCREW-LINE Implant, Promote® incl. screw-mounted insertion post and cover screw, sterile</p> <p>Material Titanium Grade 4</p>	K1045.3311	3.3 mm	11 mm 13 mm 16 mm	2.7 mm	3.5 mm		
	K1045.3313						
	K1045.3316						
	K1045.3809	3.8 mm	9 mm 11 mm 13 mm 16 mm				
	K1045.3811						
	K1045.3813						
	K1045.3816						
	K1045.4309	4.3 mm	9 mm 11 mm 13 mm 16 mm	3.9 mm	4.6 mm		
	K1045.4311						
	K1045.4313						
	K1045.4316						
	K1045.5009	5.0 mm	9 mm 11 mm 13 mm				
	K1045.5011						
	K1045.5013						
 <p>CAMLOG® SCREW-LINE Implant, Promote® plus incl. screw-mounted insertion post and cover screw, sterile</p> <p>Material Titanium Grade 4</p>	K1055.3311	3.3 mm	11 mm 13 mm 16 mm	2.7 mm	3.5 mm		
	K1055.3313						
	K1055.3316						
	K1055.3809	3.8 mm	9 mm 11 mm 13 mm 16 mm				
	K1055.3811						
	K1055.3813						
	K1055.3816						
	K1055.4309	4.3 mm	9 mm 11 mm 13 mm 16 mm	3.9 mm	4.6 mm		
	K1055.4311						
	K1055.4313						
	K1055.4316						
	K1055.5009	5.0 mm	9 mm 11 mm 13 mm				
	K1055.5011						
	K1055.5013						

Note

Implants with the screw-mounted insertion post (Art. No. K1045.xxxx/K1055.xxxx) are to be used for template-guided implant insertion with the SCREW-LINE Guide System.
The SCREW-LINE Guide System can only be used for implant diameters 3.3/3.8/4.3 mm.

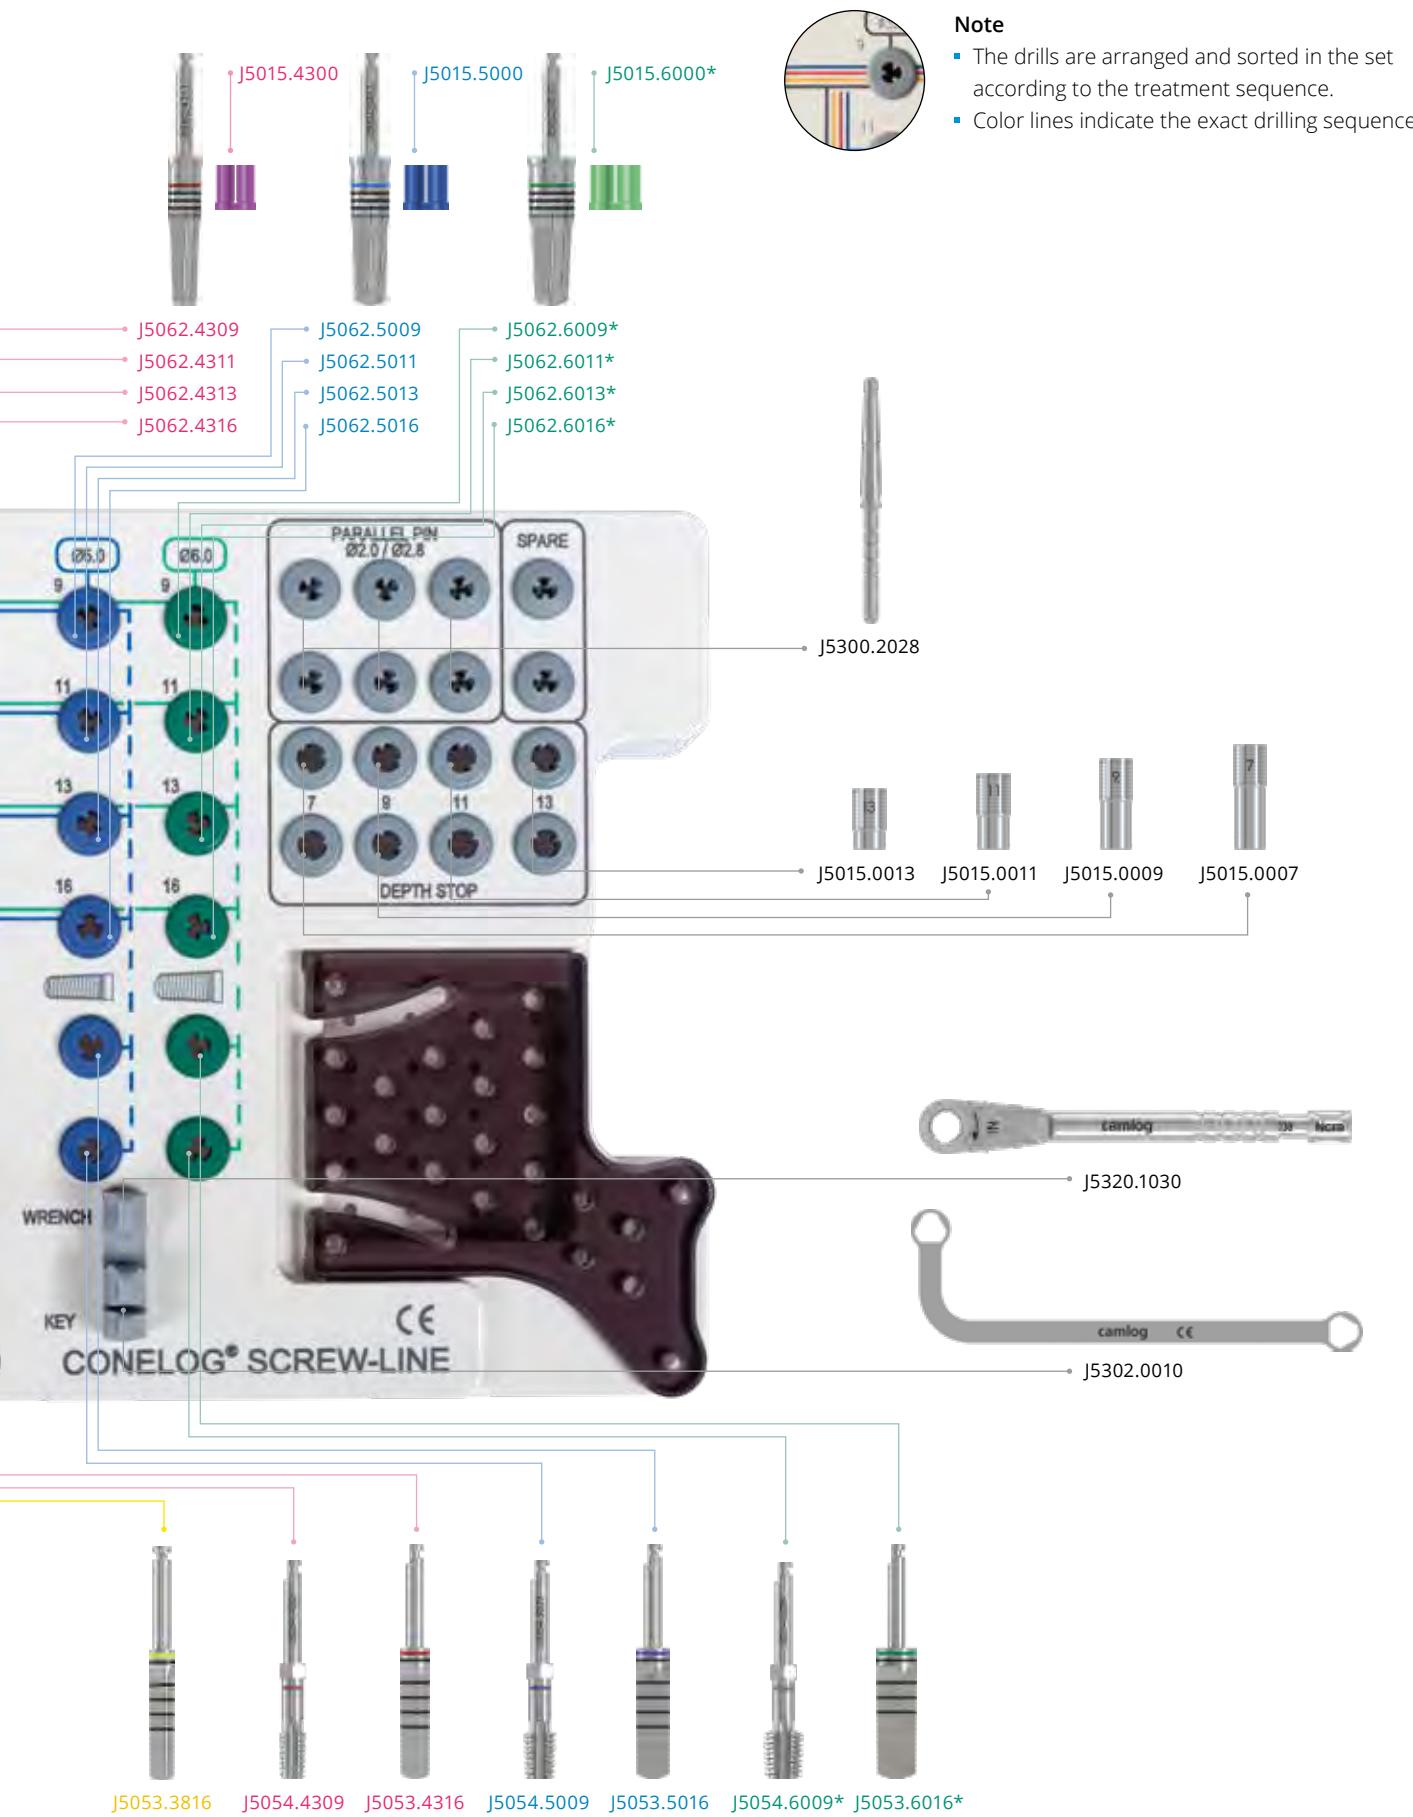
SCREW-LINE

Surgery set CAMLOG®/CONELOG®



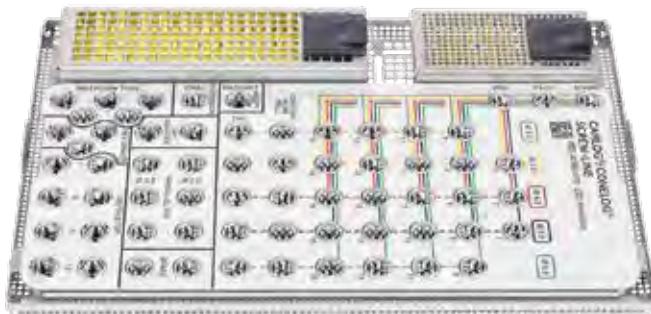
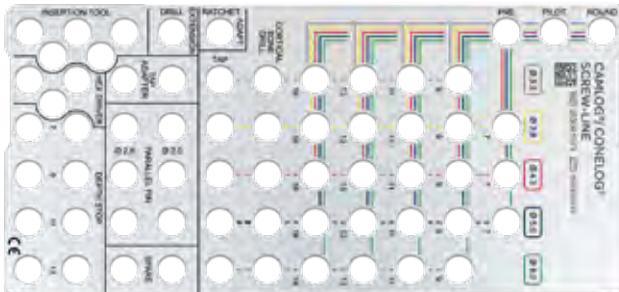
* This article is not included in the surgery set and must be ordered separately.

** only for CONELOG® SCREW-LINE Implants length 7 mm



SCREW-LINE

Surgery set and wash tray

	Article	Art. No.
	<p>Surgery set CAMLOG®/CONELOG® SCREW-LINE contains all necessary surgical instruments sorted by color code, incl. torque wrench and holding key for insertion post (drills and taps for Ø 6.0 mm are not included)</p>	J5300.0063
	<p>Surgery wash tray CAMLOG®/CONELOG® SCREW-LINE incl. steel pattern, without content</p>	J5300.8968
	<p>Pattern for surgery wash tray CAMLOG®/CONELOG® SCREW-LINE</p> <p>Material Stainless steel</p>	J5300.1073

Preparation of the implant bed for CAMLOG® SCREW-LINE Implants and for CONELOG® SCREW-LINE Implants is performed with identical instruments.

Surgical instruments

	Article	Art. No.	Ø	L
	<p>Pre-drill SCREW-LINE resterilizable</p> <p>Material Stainless steel</p>	J5051.2800	1.7- 2.8 mm	-
	<p>Paralleling pin SCREW-LINE with depth marks</p> <p>Material Titanium alloy</p>	J5300.2028	1.7- 2.8 mm/ 2.0 mm	33.5 mm

	Article	Size	Art. No.	Ø	L
	Form drill SCREW-LINE resterilizable	-	J5062.3309 J5062.3311 J5062.3313 J5062.3316 J5062.3809 J5062.3811 J5062.3813 J5062.3816 J5062.4309 J5062.4311 J5062.4313 J5062.4316 J5062.5009 J5062.5011 J5062.5013 J5062.5016 J5062.6009 J5062.6011 J5062.6013 J5062.6016	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm	9 mm 11 mm 13 mm 16 mm 9 mm 11 mm 13 mm 16 mm 9 mm 11 mm 13 mm 16 mm 9 mm 11 mm 13 mm 16 mm 9 mm 11 mm 13 mm 16 mm
	Depth stop for form drills SCREW-LINE (can also be used for form drills PROGRESSIVE-LINE), resterilizable	-	J5015.3300 J5015.3800 J5015.4300 J5015.5000 J5015.6000	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm	-
	Form drill SCREW-LINE Cortical bone resterilizable	-	J5053.3316 J5053.3816 J5053.4316 J5053.5016 J5053.6016	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm	-
	Tap SCREW-LINE with hexagon, resterilizable	-	J5054.3309 J5054.3809 J5054.4309 J5054.5009 J5054.6009	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm	-
	Tap adapter for tap SCREW-LINE	short	J5322.0010		18.0 mm
	Material Stainless steel	long	J5322.0011		23.0 mm

SCREW-LINE Guide System



3D implant planning, creation of drilling template designs and drilling templates are available from our CAD/CAM DEDICAM® Service Division. DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

SCREW-LINE Guide System

Surgical instruments

	Article	Art. No.	\varnothing	L
	Guide System Pilot drill set internal irrigation, sterile (for pilot drilling \varnothing 2.0 mm)	J5063.3311	3.3 mm	11 mm (incl. 5 and 9 mm)**
		J5063.3313		13 mm (incl. 5, 9 and 11 mm)**
		J5064.3316*		16 mm
		J5063.4309	3.8 mm	9 mm (incl. 5 mm)**
			4.3 mm	
		J5063.4311	3.8 mm	11 mm (incl. 5 and 9 mm)**
			4.3 mm	
		J5063.4313	3.8 mm	13 mm (incl. 5, 9 and 11 mm)**
			4.3 mm	
		J5064.4316*	3.8 mm	16 mm
			4.3 mm	
	Guide System Surgery set SCREW-LINE internal irrigation, sterile	J5065.3311	3.3 mm	11 mm (incl. 5 and 9 mm)****
		J5065.3313		13 mm (incl. 5, 9 and 11 mm)****
		J5066.3316***		16 mm
		J5065.3809	3.8 mm	9 mm (incl. 5 mm)****
		J5065.3811		11 mm (incl. 5 and 9 mm)****
		J5065.3813		13 mm (incl. 5, 9 and 11 mm)****
		J5066.3816***		16 mm
		J5065.4309	4.3 mm	9 mm (incl. 5 mm)****
		J5065.4311		11 mm (incl. 5 and 9 mm)****
		J5065.4313		13 mm (incl. 5, 9 and 11 mm)****
		J5066.4316***		16 mm

* Necessary Guide System pilot drill for implant length 16 mm, following obligatory prior use of the pilot drill set length 13 mm.

** All Guide System pilot drill sets include a 5 mm long pilot drill, as well as all pilot drills necessary for the selected implant length.

*** Necessary Guide System form drill for implant length 16 mm, following obligatory prior use of the Guide System surgery set length 13 mm.

**** All Guide System surgery sets include a 5 mm long pre-drill, as well as all form drills necessary for the selected implant length.

All Guide System drills and gingiva punches for SCREW-LINE are intended for single use only.

Note

Implants with the screw-mounted insertion post (Art. No. K1045.xxxx/K1055.xxxx) are to be used for template-guided implant insertion with the SCREW-LINE Guide System.

The SCREW-LINE Guide System can only be used for implant diameters 3.3/3.8/4.3 mm.

	Article	Art. No.	Ø	L
	Guide System Form drill SCREW-LINE Cortical bone internal irrigation, sterile	J5068.3311	3.3 mm	11 mm
		J5068.3313		13 mm
		J5068.3316		16 mm
		J5068.3809	3.8 mm	9 mm
		J5068.3811		11 mm
		J5068.3813		13 mm
		J5068.3816		16 mm
		J5068.4309	4.3 mm	9 mm
		J5068.4311		11 mm
		J5068.4313		13 mm
		J5068.4316		16 mm
	Guide System Gingiva punch sterile	J5041.3303	3.3 mm	-
		J5041.3803	3.8 mm	
		J5041.4303	4.3 mm	
	Guide System Guiding sleeve height 3.0 mm 2 units	J3734.3303*	3.3 mm	-
		J3734.3803*	3.8 mm	
		J3734.4303*	4.3 mm	
	Drill extension ISO shaft, for instruments with internal irrigation	J5002.0005	-	26.6 mm
	Cleaning needle for instruments with internal irrigation	J5002.0012	-	-
	Cleaning cannula for instruments with internal irrigation	J5002.0020	-	-

* The sleeves are not compatible with the PROGRESSIVE-LINE Guide System.

All Guide System drills and gingiva punches for SCREW-LINE are intended for single use only.

Surgical instruments



Surgical instruments

	Article	Art. No.	Ø	L
	Round bur resterilizable Material Stainless steel	J5050.2300	2.3 mm	-
	Point drill resterilizable Material Stainless steel	J5051.1500	1.5 mm	-
	Pilot drill without coil, resterilizable Material Stainless steel	J5051.2003	2.0 mm	-
	Pilot drill SCREW-LINE (can also be used for the PROGRESSIVE-LINE), resterilizable Material Stainless steel	J5051.2000	2.0 mm	-
	Depth stop SCREW-LINE for pilot drill (J5051.2000) and pre-drill (J5051.2800) with reduced coil, resterilizable Material Stainless steel	J5015.0009	-	9 mm
		J5015.0011		11 mm
		J5015.0013		13 mm
	Bone profiler Material Stainless steel	Ø 5.0 mm	J5003.3350*	3.3 mm
		Ø 6.0 mm	J5003.4360*	3.8 mm
		Ø 7.0 mm	J5003.5070*	4.3 mm
	CAMLOG® Guiding pin for bone profiler Material Titanium alloy	J5002.3300	5.0 mm	5.0 mm
		J5002.3800	3.3 mm	-
		J5002.4300	3.8 mm	-
		J5002.5000	4.3 mm	-

* Always to be used in conjunction with the matching guiding pin!

Surgical instruments

	Article	Art. No.	Ø	Dimension
	Countersink Material Stainless steel	Ø 4.6 mm	J5006.3346	3.3 mm
		Ø 5.2 mm	J5006.3852	3.8 mm
		Ø 5.6 mm	J5006.4356	4.3 mm
		Ø 6.3 mm	J5006.5063	5.0 mm
	Baring drill for cover screw Material Stainless steel	J5004.3300	3.3 mm	
		J5004.3800	3.8 mm	
		J5004.4300	4.3 mm	
		J5004.5000	5.0 mm	
	Drill extension ISO shaft (not for drills with internal irrigation) Material Stainless steel	J5002.0006	-	26.5 mm
	Drill shaft extension 15 mm for angle shaft instruments Material Stainless steel	KI589B.204.	-	15.0 mm
	Removal adapter for implants with snap-in insertion posts Material Stainless steel	J5300.0022*	3.3 mm	
			3.8 mm	
			4.3 mm	6.2 mm
			5.0 mm	
	Orientation gauge for Ø 2.0 mm pilot drill hole Material Nitinol	J3551.0001	-	-
	Aligning tool for angled bar abutments, for insertion post Material Stainless steel	J2269.0005		17°
				30°
		J2269.0006		
	Gingival height indicator, straight Material Titanium alloy	J3550.3300	3.3 mm	
		J3550.3800	3.8 mm	
		J3550.4300	4.3 mm	
		J3550.5000	5.0 mm	

* only for use with CAMLOG® PROGRESSIVE-LINE Implants with Art. No. K1076.xxxx and CAMLOG® SCREW-LINE Implants with Art. No. K1046.xxxx and K1056.xxxx

Manufacturer of the drill shaft extension: Gebr. Brasseler GmbH & Co. KG | Trophagener Weg 25 | 32657 Lemgo | Germany

	Article	Size	Art. No.	Dimension
	Driver for screw implants, manual/wrench	extra short	J5300.0031	13.7 mm
	Material Stainless steel	short	J5300.0032	19.2 mm
		long	J5300.0033	24.8 mm
	Driver for screw implants, with ISO shaft for angled hand piece (without hexagon at the shaft)	short	J5300.0036	19.1 mm
	Material Stainless steel	long	J5300.0037	28.2 mm
	Driver for screw implants, with ISO shaft for angled hand piece, for hexagon clamping system	short	J5300.0034	19.1 mm
	Material Stainless steel	long	J5300.0035	28.2 mm
	Torque wrench Material Stainless steel	-	J5320.1030	-
	Torque wrench 10-70 Ncm Material Stainless steel	-	2-1001120	-
	PickUp instrument Holder for carrying implants Material Stainless steel	-	J5300.0030	-
	Adapter ISO shaft for angled hand piece/wrench Material Stainless steel	-	J5002.0011	21.0 mm
	Wrench adapter Material Stainless steel	-	J5002.0013	12.5 mm

Manufacturer torque wrench 10-70 Ncm: Josef Ganter Feinmechanik GmbH | Niedereschacher Strasse 24 | 78083 Dauchingen | Germany

Surgical instruments

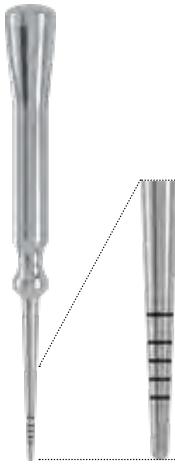
	Article	Size	Art. No.	Ø	Dimension
	Holding key for insertion post Material Stainless steel	-	J5302.0010	-	-
	CAMLOG® Adapter for CAMLOG® Implants Material Stainless steel	short	K5302.3311	3.3 mm	29.8 mm
			K5302.3811	3.8 mm	
			K5302.4311	4.3 mm	
			K5302.6011	5.0 mm	
				6.0 mm	
		long	K5302.3310	3.3 mm	34.8 mm
			K5302.3810	3.8 mm	
			K5302.4310	4.3 mm	
	Holding sleeve to guide the adapter into the screw implant Material Titanium alloy	-	J5302.3300	3.3 mm	-
			J5302.3800	3.8 mm	
			J5302.4300	4.3 mm	
			J5302.5000	5.0 mm	
			J5302.6000	6.0 mm	
	Screwdriver Hex, manual/wrench Material Stainless steel	extra short	J5317.0510	-	14.5 mm
		short	J5317.0501		22.5 mm
		long	J5317.0502		30.3 mm
	Screwdriver Hex, ISO shaft Material Stainless steel	short	J5317.0504	-	18.0 mm
		long	J5317.0503		26.0 mm
	Manual screwdriver, hex without wrench head connection Material Stainless steel	-	J5317.0511	-	23.0 mm

SCREW-LINE Osteotomy Set



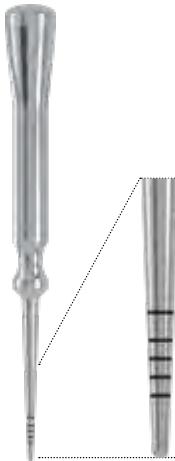
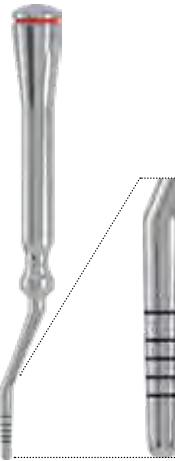
SCREW-LINE Osteotomy Set

straight convex

	Article	Art. No.	Ø
	Osteotomy set CAMLOG®/CONELOG® SCREW-LINE straight convex Material Stainless steel	J5418.0020	-
	Pre-Osteotome SCREW-LINE straight convex Material Stainless steel	J5417.2800*	1.7- 2.8 mm
	Osteotomes SCREW-LINE straight convex Material Stainless steel	J5418.3300* J5418.3800* J5418.4300* J5418.5000* J5418.6000*	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm

* These products are also included in the osteotomy set CAMLOG®/CONELOG® SCREW-LINE straight convex.

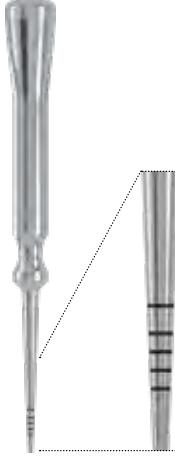
angled convex

	Article	Art. No.	Ø
	Osteotomy set CAMLOG®/CONELOG® SCREW-LINE angled convex Material Stainless steel	J5418.0030	-
	Pre-Osteotome SCREW-LINE straight convex Material Stainless steel	J5417.2800*	1.7- 2.8 mm
	Osteotomes SCREW-LINE angled convex Material Stainless steel	J5418.3310* J5418.3810* J5418.4310* J5418.5010* J5418.6010*	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm

* These products are also included in the osteotomy set CAMLOG®/CONELOG® SCREW-LINE angled convex.

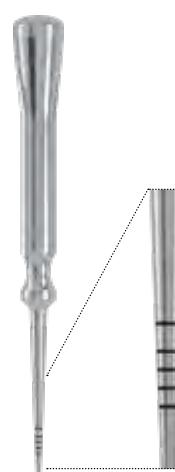
SCREW-LINE Osteotomy Set

straight concave

	Article	Art. No.	Ø
	Osteotomy set CAMLOG®/CONELOG® SCREW-LINE straight concave Material Stainless steel	J5420.0020	-
	Pre-Osteotome SCREW-LINE straight concave Material Stainless steel	J5419.2800*	1.7- 2.8 mm
	Osteotomes SCREW-LINE straight concave Material Stainless steel	J5420.3300*	3.3 mm
		J5420.3800*	3.8 mm
		J5420.4300*	4.3 mm
		J5420.5000*	5.0 mm
		J5420.6000*	6.0 mm

* These products are also included in the osteotomy set CAMLOG®/CONELOG® SCREW-LINE straight concave.

angled concave

	Article	Art. No.	Ø
	Osteotomy set CAMLOG®/CONELOG® SCREW-LINE angled concave Material Stainless steel	J5420.0030	-
	Pre-Osteotome SCREW-LINE straight concave Material Stainless steel	J5419.2800*	1.7- 2.8 mm
	Osteotomes SCREW-LINE angled concave Material Stainless steel	J5420.3310* J5420.3810* J5420.4310* J5420.5010* J5420.6010*	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm

* These products are also included in the osteotomy set CAMLOG®/CONELOG® SCREW-LINE angled concave.

Cover screws and healing caps




Cover screws

	Article	Art. No.	\emptyset
	CAMLOG® Implant cover screw	J2019.3300	3.3 mm
	Material Titanium alloy	J2019.3800	3.8 mm
		J2019.4300	4.3 mm
		J2019.5000	5.0 mm
		J2019.6000	6.0 mm


The implant cover screws are for single use only and must not be resterilized.

Healing caps

	Article	Art. No.	\emptyset	GH	$G \emptyset$
	CAMLOG® Healing caps, cylindrical sterile	J2015.3320	3.3 mm	2.0 mm	3.5 mm
		J2015.3340		4.0 mm	3.5 mm
		J2015.3360		6.0 mm	3.5 mm
		J2015.3820	3.8 mm	2.0 mm	4.0 mm
		J2015.3840		4.0 mm	4.0 mm
		J2015.3860*		6.0 mm	4.0 mm
		J2015.4320	4.3 mm	2.0 mm	4.5 mm
		J2015.4340		4.0 mm	4.5 mm
		J2015.4360*		6.0 mm	4.5 mm
		J2015.5020	5.0 mm	2.0 mm	5.2 mm
		J2015.5040		4.0 mm	5.2 mm
		J2015.5060*		6.0 mm	5.2 mm
		J2015.6020	6.0 mm	2.0 mm	6.2 mm
		J2015.6040		4.0 mm	6.2 mm
		J2015.6060*		6.0 mm	6.2 mm
	CAMLOG® Healing caps, wide body sterile	J2014.3320	3.3 mm	2.0 mm	4.4 mm
		J2014.3340		4.0 mm	4.5 mm
		J2014.3820	3.8 mm	2.0 mm	4.9 mm
		J2014.3840		4.0 mm	5.0 mm
		J2014.3860		6.0 mm	5.0 mm
		J2014.4320	4.3 mm	2.0 mm	5.4 mm
		J2014.4340		4.0 mm	5.5 mm
		J2014.4360		6.0 mm	5.5 mm
		J2014.5020	5.0 mm	2.0 mm	6.1 mm
		J2014.5040		4.0 mm	6.2 mm
		J2014.5060		6.0 mm	6.2 mm
		J2014.6020	6.0 mm	2.0 mm	7.1 mm
		J2014.6040		4.0 mm	7.2 mm
		J2014.6060		6.0 mm	7.2 mm

* suitable for bite registration

Healing caps

	Article	Art. No.	\emptyset	GH	$G \emptyset$
	CAMLOG® Healing cap, wide body, narrow emergence sterile Material Titanium alloy	J2024.3340	3.3 mm	4.0 mm	4.5 mm
		J2024.3360		6.0 mm	4.5 mm
		J2024.3840	3.8 mm	4.0 mm	5.0 mm
		J2024.3860		6.0 mm	5.0 mm
		J2024.4340	4.3 mm	4.0 mm	5.5 mm
		J2024.4360		6.0 mm	5.5 mm
		J2024.5040	5.0 mm	4.0 mm	6.2 mm
		J2024.5060		6.0 mm	6.2 mm
		J2024.6040	6.0 mm	4.0 mm	7.2 mm
		J2024.6060		6.0 mm	7.2 mm
	CAMLOG® Healing cap, bottleneck sterile Material Titanium alloy	J2011.3340	3.3 mm	4.0 mm	3.5 mm
		J2011.3840	3.8 mm	4.0 mm	4.0 mm
		J2011.3860		6.0 mm	4.0 mm
		J2011.4340	4.3 mm	4.0 mm	4.5 mm
		J2011.4360		6.0 mm	4.5 mm
		J2011.5040	5.0 mm	4.0 mm	5.2 mm
		J2011.5060		6.0 mm	5.2 mm
		J2011.6040	6.0 mm	4.0 mm	6.2 mm
		J2011.6060		6.0 mm	6.2 mm

Healing caps

Platform Switching

	Article	Art. No.	\emptyset	GH	$G \emptyset$
	CAMLOG® Healing cap PS, cylindrical sterile, for Platform Switching with CAMLOG® Implants with K article numbers Material Titanium alloy	K2005.3820	3.8 mm	2.0 mm	3.3 mm
		K2005.3840		4.0 mm	3.3 mm
		K2005.3860*		6.0 mm	3.3 mm
		K2005.4320	4.3 mm	2.0 mm	3.8 mm
		K2005.4340		4.0 mm	3.8 mm
		K2005.4360*		6.0 mm	3.8 mm
		K2005.5020	5.0 mm	2.0 mm	4.4 mm
		K2005.5040		4.0 mm	4.4 mm
		K2005.5060*		6.0 mm	4.4 mm
		K2005.6020	6.0 mm	2.0 mm	5.1 mm
		K2005.6040		4.0 mm	5.1 mm
		K2005.6060*		6.0 mm	5.1 mm
	CAMLOG® Healing cap PS, wide body sterile, for Platform Switching with CAMLOG® Implants with K article numbers Material Titanium alloy	K2004.3840	3.8 mm	4.0 mm	5.0 mm
		K2004.3860		6.0 mm	5.0 mm
		K2004.4340	4.3 mm	4.0 mm	5.5 mm
		K2004.4360		6.0 mm	5.5 mm
		K2004.5040	5.0 mm	4.0 mm	6.2 mm
		K2004.5060		6.0 mm	6.2 mm
		K2004.6040	6.0 mm	4.0 mm	7.2 mm
		K2004.6060		6.0 mm	7.2 mm
	CAMLOG® Healing cap PS, bottleneck sterile, for Platform Switching with CAMLOG® Implants with K article numbers Material Titanium alloy	K2001.3840	3.8 mm	4.0 mm	4.0 mm
		K2001.3860		6.0 mm	4.0 mm
		K2001.4340	4.3 mm	4.0 mm	4.5 mm
		K2001.4360		6.0 mm	4.5 mm
		K2001.5040	5.0 mm	4.0 mm	5.2 mm
		K2001.5060		6.0 mm	5.2 mm

* suitable for bite registration

Healing caps are for single use only and must not be resterilized.

Anatomical healing caps are available in two versions via our DEDICAM® CAD/CAM services:

1. Gingindividual Concept Pro are individual PEEK healing caps for patient-specific restorations.
2. Gingindividual Concept Basic are prefabricated PEEK healing caps in eight predefined tooth shapes which can also be used as scanbodies. DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

Prosthetics





Scanbodies

	Article	Art. No.	\emptyset
 10 mm	CAMLOG® Scanbody** incl. CAMLOG® Abutment screw, sterile Material PEEK	K2610.3310	3.3 mm
		K2610.3810*	3.8 mm
		K2610.4310*	4.3 mm
		K2610.6010*	5.0 mm
			6.0 mm
 10 mm	CAMLOG® Scanbody multi-use** incl. CAMLOG® Abutment screw Material Titanium alloy	K2630.3300	3.3 mm
		K2630.3800*	3.8 mm
		K2630.4300*	4.3 mm
		K2630.6000*	5.0 mm
			6.0 mm
 10.2 mm	CAMLOG® ScanPost for Sirona® incl. CAMLOG® Abutment screw Material Titanium alloy	K2620.3306	3.3 mm
		K2620.3806*	3.8 mm
		K2620.4306*	4.3 mm
		K2620.5006*	5.0 mm
		K2620.6006*	6.0 mm

* can also be used for Platform Switching

** Please check whether the CAMLOG® Scanbody is available in the CAD software used.

CAD libraries for selected CAMLOG® Prosthetic components are available for free download at:

www.biohorizonscamlog.com/cad-libraries

Matching Sirona® Scanbodies size S for CAMLOG® ScanPosts and CAMLOG® Titanium base CAD/CAM, crown, with \emptyset 3.3/3.8/4.3 mm:
 Article number 6431311

Matching Sirona® Scanbodies size L for CAMLOG® ScanPosts and CAMLOG® Titanium base CAD/CAM, crown, with \emptyset 5.0/6.0 mm:
 Article number 6431329

Sirona® Scanbodies are available from Dentsply Sirona or the specialized trade.

Impression taking

	Article	Art. No.	Ø
 <p>3 mm 10 mm</p>	CAMLOG® Impression post, cylindrical, open tray incl. fixing screw, sterile Material Titanium alloy	K2125.3300	3.3 mm
		K2125.3800	3.8 mm
		K2125.4300	4.3 mm
		K2125.5000	5.0 mm
		K2125.6000	6.0 mm
 <p>10.7 mm</p>	CAMLOG® Impression post, cylindrical, closed tray incl. impression cap, bite registration cap and fixing screw, sterile Material Titanium alloy/PBT	K2115.3300	3.3 mm
		K2115.3800	3.8 mm
		K2115.4300	4.3 mm
		K2115.5000	5.0 mm
		K2115.6000	6.0 mm
 <p>3 mm 10 mm</p>	CAMLOG® Impression post, wide body, open tray incl. fixing screw, sterile Material Titanium alloy	K2124.3300	3.3 mm
		K2124.3800	3.8 mm
		K2124.4300	4.3 mm
		K2124.5000	5.0 mm
		K2124.6000	6.0 mm
 <p>10.7 mm</p>	CAMLOG® Impression post, wide body, closed tray incl. impression cap, bite registration cap and fixing screw, sterile Material Titanium alloy/PBT	K2114.3300	3.3 mm
		K2114.3800	3.8 mm
		K2114.4300	4.3 mm
		K2114.5000	5.0 mm
		K2114.6000	6.0 mm
 <p>3 mm 10 mm</p>	CAMLOG® Impression post, wide body, narrow emergence, open tray incl. fixing screw, sterile Material Titanium alloy	K2124.3301	3.3 mm
		K2124.3801	3.8 mm
		K2124.4301	4.3 mm
		K2124.5001	5.0 mm
		K2124.6001	6.0 mm
 <p>10.7 mm</p>	CAMLOG® Impression post, wide body, narrow emergence, closed tray incl. impression cap, bite registration cap and fixing screw, sterile Material Titanium alloy/PBT	K2114.3301	3.3 mm
		K2114.3801	3.8 mm
		K2114.4301	4.3 mm
		K2114.5001	5.0 mm
		K2114.6001	6.0 mm

Impression taking

Article	Quantity	Art. No.	Ø
 <p>PS</p> <p>3 mm 10 mm</p> <p>CAMLOG® Impression post PS, open tray incl. fixing screw, sterile</p> <p>Material Titanium alloy</p>	1	K2122.3800	3.8 mm
		K2122.4300	4.3 mm
		K2122.5000	5.0 mm
		K2122.6000	6.0 mm
 <p>PS</p> <p>10.7 mm</p> <p>CAMLOG® Impression post PS, closed tray incl. impression cap, bite registration cap and fixing screw, sterile</p> <p>Material Titanium alloy/PBT</p>	1	K2111.3800	3.8 mm
		K2111.4300	4.3 mm
		K2111.5000	5.0 mm
		K2111.6000	6.0 mm
 <p>Impression cap for impression post, closed tray, sterile</p> <p>Material PBT</p>	6	J2111.3310	3.3 mm
		J2111.3810	3.8 mm
		J2111.4310	4.3 mm
		J2111.5010	5.0 mm
		J2111.6010	6.0 mm

Anatomical impression posts, congruent in shape with the anatomical healing caps, are available in two versions via our DEDICAM® CAD/CAM services:

1. Gingivinal Concept Pro are individual PEEK impression posts for patient-specific restorations.
2. Gingivinal Concept Basic are prefabricated PEEK impression posts in eight predefined tooth shapes.


All PEEK impression posts are available for both open and closed impressions.

DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

Bite registration


Article	Quantity	Art. No.	Ø
 <p>8.1 mm</p> <p>CAMLOG® Bite registration post incl. fixing screw and bite registration cap, sterile</p> <p>Material Titanium alloy/PBT</p>	1	J2141.3300	3.3 mm
		J2141.3800	3.8 mm
		J2141.4300	4.3 mm
		J2141.5000	5.0 mm
 <p>Bite registration cap sterile</p> <p>Material PBT</p>	6	J2112.3310	3.3 mm
		J2112.3810	3.8 mm
		J2112.4310	4.3 mm
		J2112.5010	5.0 mm
		J2112.6010	6.0 mm

Cast fabrication

	Article	Quantity	Art. No.	Ø
	CAMLOG® Lab analog for cast models Material Titanium alloy	1	K3010.3300	3.3 mm
			K3010.3800	3.8 mm
			K3010.4300	4.3 mm
			K3010.5000	5.0 mm
			K3010.6000	6.0 mm
		3	K3010.3303	3.3 mm
			K3010.3803	3.8 mm
			K3010.4303	4.3 mm
			K3010.5003	5.0 mm
	CAMLOG® Implant analog for printed and cast models Material Titanium alloy	1	K3025.3300	3.3 mm
			K3025.3800	3.8 mm
			K3025.4300	4.3 mm
			K3025.5000	5.0 mm
			K3025.6000	6.0 mm
		3	K3025.3303	3.3 mm
			K3025.3803	3.8 mm
			K3025.4303	4.3 mm
			K3025.5003	5.0 mm
	Handle for implant analog Material Stainless steel	1	J3025.0010	3.3 mm
				3.8 mm
				4.3 mm
			J3025.0015	5.0 mm
		-		6.0 mm
			NT/JA-AN-00/3D	3.3 mm
			CAM 5.DIM.380 / NT/JA-AR-00/3D	3.8 mm
	DIM Analog® for the CAMLOG® Implant System for printed models, incl. thumbscrew Material Titanium alloy/Stainless steel	-	NT/JA-AW-00/3D	4.3 mm
				5.0 mm
			NT/JA-AX-00/3D	6.0 mm

Manufacturer DIM-Analog®: IMPLANT PROTESIS DENTAL 2004 S.I. | Carrer Rosa dels Vents 9-15 | 08338 Premià de Dalt (Barcelona) | Spain
 DIM Analog® is a registered trademark of the IPD Dental Group company.

Temporary restoration

	Article	Art. No.	\emptyset
 12 mm	CAMLOG® Temporary abutment, PEEK preparable, incl. CAMLOG® Abutment screw	K2241.3800	3.8 mm
	Material PEEK	K2241.4300	4.3 mm
		K2241.5000	5.0 mm
		K2241.6000	6.0 mm
 12 mm	CAMLOG® Temporary abutment PS, PEEK, for Platform Switching preparable, incl. CAMLOG® Abutment screw	K2208.3800	3.8 mm
	Material PEEK	K2208.4300	4.3 mm
		K2208.5000	5.0 mm
		K2208.6000	6.0 mm
 12 mm	CAMLOG® Temporary abutment, crown incl. CAMLOG® Abutment screw	K2239.3300*	3.3 mm
	Material Titanium alloy	K2239.3800	3.8 mm
		K2239.4300	4.3 mm
		K2239.5000	5.0 mm
		K2239.6000	6.0 mm
 12 mm	CAMLOG® Temporary abutment, bridge incl. CAMLOG® Abutment screw	J2339.3300	3.3 mm
	Material Titanium alloy	J2339.3800	3.8 mm
		J2339.4300	4.3 mm
		J2339.5000	5.0 mm
		J2339.6000	6.0 mm

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Titanium bases CAD/CAM

	Article	Art. No.	Ø	GH	
	CAMLOG® Titanium base CAD/CAM, crown incl. CAMLOG® Abutment screw and CAMLOG® Bonding aid (POM)	K2244.3348*	3.3 mm	0.4 mm	
	Material Titanium alloy/POM	K2244.3848	3.8 mm	0.3 mm	
		K2244.4348	4.3 mm		
		K2244.5048	5.0 mm		
		K2244.6048	6.0 mm		
	CAMLOG® Titanium base CAD/CAM, bridge incl. CAMLOG® Abutment screw and CAMLOG® Bonding aid (POM)	J2344.3348	3.3 mm	0.4 mm	
	Material Titanium alloy/POM	J2344.3848	3.8 mm		
		J2344.4348	4.3 mm		
		J2344.5048	5.0 mm		
		J2344.6048	6.0 mm		
	CAMLOG® Titanium base CAD/CAM PS for Platform Switching, crown incl. CAMLOG® Abutment screw and CAMLOG® Bonding aid (POM)	K2210.3808	3.8 mm	0.8 mm	
	Material Titanium alloy/POM	K2210.4308	4.3 mm		
		K2210.5008	5.0 mm		
	CAMLOG® Modeling aid for CAMLOG® Titanium bases CAD/CAM, crown burn-out				
	Material POM	J2244.3302	3.3 mm		
	CAMLOG® Bonding aid 2 units	J2244.3802	3.8 mm	-	
	Material POM	J2244.4302	4.3 mm		
		J2244.5002	5.0 mm		
		J2244.6002	6.0 mm		
	CAMLOG® Bonding aid 2 units				
	Material POM	J4009.1600	3.3 mm	-	
			3.8 mm		
			4.3 mm		
		J4009.2000	5.0 mm		
			6.0 mm		

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

The geometries of the CAMLOG® Titanium bases CAD/CAM are available as a CAD library for leading dental CAD systems.
 The libraries are available for free download at:

www.biohorizonscamlog.com/cad-libraries

DEDICAM® CAD/CAM prosthetics from Camlog

Individually CAD/CAM fabricated restorations on Titanium bases are available from Camlog through our DEDICAM® Service Division.
 DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

Titanium bases CAD/CAM free

	Article	Size	Art. No.	Ø	GH
 4.7 mm	CAMLOG® Titanium base CAD/CAM free, crown incl. abutment screw and lab screw Material Titanium alloy	short	K2247.3348*	3.3 mm	0.4 mm
			K2247.3848	3.8 mm	
			K2247.4348	4.3 mm	0.3 mm
			K2247.5048	5.0 mm	
 4.7 mm	CAMLOG® Titanium base CAD/CAM free PS, crown, for Platform Switching incl. abutment screw and lab screw Material Titanium alloy	short	K2247.3808	3.8 mm	
			K2247.4308	4.3 mm	0.8 mm
			K2247.5008	5.0 mm	
 6.5 mm	CAMLOG® Titanium base CAD/CAM free, crown incl. abutment screw and lab screw Material Titanium alloy	long	K2265.3848	3.8 mm	
			K2265.4348	4.3 mm	0.3 mm
			K2265.5048	5.0 mm	
 6.5 mm	CAMLOG® Titanium base CAD/CAM free PS, crown, for Platform Switching incl. abutment screw and lab screw Material Titanium alloy	long	K2265.3808	3.8 mm	
			K2265.4308	4.3 mm	0.8 mm
			K2265.5008	5.0 mm	
	Ballpoint Screwdriver hex, manual/wrench Material Stainless steel	short	J5319.0501**		24 mm
		long	J5319.0502**		32 mm
	Ballpoint screwdriver Hex, ISO shaft Material Stainless steel	short	J5319.0504**		27 mm
		long	J5319.0503**		35 mm

* Only for crown restorations in the region of the upper lateral and lower lateral and central incisors

** Only for use with angled screw channel

The CAMLOG® Abutment screw (M1.6/M2.0) is tightened with the ballpoint screwdrivers (see above, for angled screw channels) and with the screwdrivers, hex (for straight screw channels) (see page 98).

The geometries of the CAMLOG® Titanium bases CAD/CAM free are available as a CAD library for leading dental CAD systems.

The libraries are available for free download at:

www.biohorizonscamlog.com/cad-libraries

CAM blanks

Type AG

	Article	Quantity	Art. No.	Ø
	CAMLOG® CAM Titanium Blank, type AG Ø 12 mm, for the Ceramill® CAD/CAM system of Amann Girrbach, Shipment includes two separately packaged abutment screws	2	K2471.3327*	3.3 mm
			K2471.3827	3.8 mm
			K2471.4327	4.3 mm
			K2471.5027	5.0 mm
			K2471.6027	6.0 mm

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors
(Ø 3.3 mm not for double crown restorations)

The CAM titanium blanks, type AG, were developed jointly by CAMLOG Biotechnologies GmbH and Amann Girrbach AG. They feature the Amann Girrbach® patented connection geometry for the blank collet and are compatible with the Ceramill® CAD/CAM System.

The corresponding CAD libraries are available for download both at www.biohorizonscamlog.com/cad-libraries and from Amann Girrbach® via the AG.live portal or via the Software Manager.

Type ME

	Article	Quantity	Art. No.	Ø
	CAMLOG® CAM Titanium Blank, type ME Ø 12 mm, length 20 mm, Shipment includes two separately packaged abutment screws	2	K2441.3320*	3.3 mm
			K2441.3820	3.8 mm
			K2441.4320	4.3 mm
			K2441.5020	5.0 mm
			K2441.6020	6.0 mm
	CAMLOG® CAM Titanium Blank, type ME Ø 12 mm, length 20 mm, Shipment includes ten separately packaged abutment screws	10	K2442.3320*	3.3 mm
			K2442.3820	3.8 mm
			K2442.4320	4.3 mm
			K2442.5020	5.0 mm
			K2442.6020	6.0 mm
	CAMLOG® CAM CoCr Blank, type ME Ø 12 mm, length 20 mm, Shipment includes two separately packaged abutment screws	2	K2461.3320*	3.3 mm
			K2461.3820	3.8 mm
			K2461.4320	4.3 mm
			K2461.6020	5.0 mm
				6.0 mm

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors
(Ø 3.3 mm not for double crown restorations)

For the milling process, the CAM blank, type ME is fixed to a cylindrical section opposite the implant-abutment connection. Medentika® Preface® Abutment holders can be used as machine-specific clamping devices. These milling holders are available for selected machines from the particular machine manufacturer. The blanks require product-specific CAM libraries. If you have any questions about compatibility, please contact the DEDICAM® Technical Service at dedicam.cad@camlog.com.

Medentika® and Preface® are registered trademarks of Medentika GmbH, Hügelsheim, Germany.

CAM blanks

Type IAC

	Article	Quantity	Art. No.	\varnothing
	CAMLOG® CAM Titanium Blank, type IAC \varnothing 12 mm, length 12.5 mm, Shipment includes two separately packaged abutment screws Material Titanium alloy	2	K2431.3313*	3.3 mm
			K2431.3813	3.8 mm
			K2431.4313	4.3 mm
			K2431.5013	5.0 mm
			K2431.6013	6.0 mm
	CAMLOG® CAM Titanium Blank, type IAC \varnothing 12 mm, length 12.5 mm, Shipment includes ten separately packaged abutment screws Material Titanium alloy	10	K2432.3313*	3.3 mm
			K2432.3813	3.8 mm
			K2432.4313	4.3 mm
			K2432.5013	5.0 mm
			K2432.6013	6.0 mm
	CAMLOG® Collet for CAM Blank, type IAC \varnothing 6 mm, length 17 mm, incl. 2 fixing screws for CAM blank, type IAC Material Stainless steel	1	K3720.3300	3.3 mm
			K3720.3800	3.8 mm
			K3720.4300	4.3 mm
			K3720.6000	5.0 mm
				6.0 mm

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors
(\varnothing 3.3 mm not for double crown restorations)

For the milling process, the CAM titanium blank, type IAC, is fixated to the implant-abutment connection via the CAMLOG® Collet for CAM blanks. The machine-specific holders and adapters for the collet as well as the milling strategies are to be provided by the user.

The geometries of the CAMLOG® CAM blanks are available as a CAD library for leading dental CAD systems.
The libraries are available for free download at:
www.biohorizonscamlog.com/cad-libraries

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Esthomic® Abutments

	Article	Art. No.	Ø	GH
	CAMLOG® Esthomic® Abutments, straight incl. CAMLOG® Abutment screw Material Titanium alloy	K2226.3810	3.8 mm	1.0-1.8 mm
		K2226.3830		3.0-4.5 mm
		K2226.4310	4.3 mm	1.0-1.8 mm
		K2226.4330		3.0-4.5 mm
		K2226.5010	5.0 mm	1.0-1.8 mm
		K2226.5030		3.0-4.5 mm
		K2226.6010	6.0 mm	1.0-1.8 mm
		K2226.6030		3.0-4.5 mm
	CAMLOG® Esthomic® Abutments, Inset incl. CAMLOG® Abutment screw Material Titanium alloy	K2235.3315*	3.3 mm	1.5-2.8 mm
		K2235.3815	3.8 mm	
		K2235.4315	4.3 mm	
		K2235.5015	5.0 mm	
		K2235.6015	6.0 mm	
	CAMLOG® Esthomic® Abutments PS, straight incl. CAMLOG® Abutment screw Material Titanium alloy	K2202.3815	3.8 mm	1.5-2.5 mm
		K2202.4315	4.3 mm	
		K2202.5015	5.0 mm	
		K2202.6015	6.0 mm	

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Esthomic® Abutments

	Article	Art. No.	Ø	GH
	CAMLOG® Esthomic® Abutments, 15° angled, type A incl. CAMLOG® Abutment screw Material Titanium alloy	K2227.3810	3.8 mm	1.0-1.8 mm
		K2227.3830		3.0-4.5 mm
		K2227.4310	4.3 mm	1.0-1.8 mm
		K2227.4330		3.0-4.5 mm
		K2227.5010	5.0 mm	1.0-1.8 mm
		K2227.5030		3.0-4.5 mm
		K2227.6010	6.0 mm	1.0-1.8 mm
		K2227.6030		3.0-4.5 mm
		K2228.3810	3.8 mm	1.0-1.8 mm
		K2228.3830		3.0-4.5 mm
	CAMLOG® Esthomic® Abutments, 15° angled, type B incl. CAMLOG® Abutment screw Material Titanium alloy	K2228.4310	4.3 mm	1.0-1.8 mm
		K2228.4330		3.0-4.5 mm
		K2228.5010	5.0 mm	1.0-1.8 mm
		K2228.5030		3.0-4.5 mm
		K2228.6010	6.0 mm	1.0-1.8 mm
		K2228.6030		3.0-4.5 mm
		K2231.3810	3.8 mm	1.0-1.8 mm
		K2231.3830		3.0-4.5 mm
		K2231.4310	4.3 mm	1.0-1.8 mm
		K2231.4330		3.0-4.5 mm
	CAMLOG® Esthomic® Abutments, 20° angled, type A incl. CAMLOG® Abutment screw Material Titanium alloy	K2231.5010	5.0 mm	1.0-1.8 mm
		K2231.5030		3.0-4.5 mm
		K2231.6010	6.0 mm	1.0-1.8 mm
		K2231.6030		3.0-4.5 mm
		K2232.3810	3.8 mm	1.0-1.8 mm
		K2232.3830		3.0-4.5 mm
		K2232.4310	4.3 mm	1.0-1.8 mm
		K2232.4330		3.0-4.5 mm
		K2232.5010	5.0 mm	1.0-1.8 mm
		K2232.5030		3.0-4.5 mm
 PS	CAMLOG® Esthomic® Abutments PS, 15° angled, type A incl. CAMLOG® Abutment screw Material Titanium alloy	K2203.3815	3.8 mm	1.5-2.5 mm
		K2203.4315	4.3 mm	
		K2203.5015	5.0 mm	
		K2203.6015	6.0 mm	
		K2204.3815	3.8 mm	1.5-2.5 mm
 PS	CAMLOG® Esthomic® Abutments PS, 15° angled, type B incl. CAMLOG® Abutment screw Material Titanium alloy	K2204.4315	4.3 mm	
		K2204.5015	5.0 mm	
		K2204.6015	6.0 mm	

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Universal and telescope abutments

	Article	Art. No.	\varnothing
 11 mm	CAMLOG® Universal abutment incl. CAMLOG® Abutment screw Material Titanium alloy	K2211.3300*	3.3 mm
		K2211.3800	3.8 mm
		K2211.4300	4.3 mm
		K2211.5000	5.0 mm
		K2211.6000	6.0 mm
 11 mm 	CAMLOG® Universal abutment PS incl. CAMLOG® Abutment screw Material Titanium alloy	K2201.3800	3.8 mm
		K2201.4300	4.3 mm
		K2201.5000	5.0 mm
		K2201.6000	6.0 mm
 12 mm	CAMLOG® Telescope abutment for double crown restorations incl. CAMLOG® Abutment screw Material Titanium alloy	K2212.3800	3.8 mm
		K2212.4300	4.3 mm
		K2212.5000	5.0 mm
		K2212.6000	6.0 mm

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Gold-plastic abutments

	Article	Art. No.	\varnothing	Noble metal weight
 11.7 mm	CAMLOG® Gold-plastic abutment cast-on, incl. CAMLOG® Abutment screw Material Cast-on gold alloy/POM	K2246.3300*	3.3 mm	approx. 0.42 g
		K2246.3800	3.8 mm	approx. 0.46 g
		K2246.4300	4.3 mm	approx. 0.65 g
		K2246.5000	5.0 mm	approx. 0.81 g
		K2246.6000	6.0 mm	approx. 0.89 g

* only for crown restorations in the region of the upper lateral and lower lateral and central incisors
 $(\varnothing 3.3 \text{ mm not for double crown restorations})$

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the screwdrivers, hex (see page 98).

Multi-unit System

New

	Article	Size	Art. No.	Ø	GH	Dimension
	CAMLOG® Multi-unit abutment, straight sterile Material Titanium alloy		J2264.3310	3.3 mm	1.0 mm	
			J2264.3320		2.0 mm	
			J2264.3330		3.0 mm	
			J2264.3810	3.8 mm	1.0 mm	
			J2264.3820		2.0 mm	
			J2264.3830		3.0 mm	
			J2264.3840		4.0 mm	
			J2264.4310	4.3 mm	1.0 mm	
			J2264.4320		2.0 mm	
			J2264.4330		3.0 mm	
			J2264.4340		4.0 mm	
			J2264.5010	5.0 mm	1.0 mm	
			J2264.5020		2.0 mm	
			J2264.5030		3.0 mm	
 	Driver, for straight Multi-unit abutments Material Stainless steel	short	J5300.0039			Length 18 mm
			J5300.0040			
	Driver, for straight Multi-unit abutments with ISO shaft for handpiece Material Stainless steel		PXMUHAAH			Length 20 mm
	CAMLOG® Multi-unit abutment, 17° angled, type A incl. abutment screw with reduced head, hex, light blue anodized, sterile Material Titanium alloy		K2266.3310	3.3 mm	1.0-2.4 mm	
			K2266.3320		2.0-3.4 mm	
			K2266.3330		3.0-4.4 mm	
			K2266.3810	3.8 mm	1.0-2.4 mm	
			K2266.3820		2.0-3.4 mm	
			K2266.3830		3.0-4.4 mm	
			K2266.4310	4.3 mm	1.0-2.4 mm	
			K2266.4320		2.0-3.4 mm	
			K2266.4330		3.0-4.4 mm	
			K2266.5010	5.0 mm	1.0-2.4 mm	
			K2266.5020		2.0-3.4 mm	
			K2266.5030		3.0-4.4 mm	
	CAMLOG® Multi-unit abutment, 17° angled, type B incl. abutment screw with reduced head, hex, light blue anodized, sterile Material Titanium alloy		K2267.3310	3.3 mm	1.0-2.4 mm	
			K2267.3320		2.0-3.4 mm	
			K2267.3330		3.0-4.4 mm	
			K2267.3810	3.8 mm	1.0-2.4 mm	
			K2267.3820		2.0-3.4 mm	
			K2267.3830		3.0-4.4 mm	
			K2267.4310	4.3 mm	1.0-2.4 mm	
			K2267.4320		2.0-3.4 mm	
			K2267.4330		3.0-4.4 mm	
			K2267.5010	5.0 mm	1.0-2.4 mm	
			K2267.5020		2.0-3.4 mm	
			K2267.5030		3.0-4.4 mm	

	Article	Art. No.	Ø	GH
	CAMLOG® Multi-unit abutment, 30° angled, type A incl. abutment screw with reduced head, hex, light blue anodized, sterile Material Titanium alloy	K2268.3310	3.3 mm	1.0-3.39 mm
		K2268.3320		2.0-4.39 mm
		K2268.3810	3.8 mm	1.0-3.39 mm
		K2268.3820		2.0-4.39 mm
		K2268.3830	4.3 mm	3.0-5.39 mm
		K2268.4310		1.0-3.39 mm
		K2268.4320		2.0-4.39 mm
		K2268.4330	5.0 mm	3.0-5.39 mm
		K2268.5010		1.0-3.39 mm
		K2268.5020		2.0-4.39 mm
		K2268.5030		3.0-5.39 mm
	CAMLOG® Multi-unit abutment, 30° angled, type B incl. abutment screw with reduced head, hex, light blue anodized, sterile Material Titanium alloy	K2269.3310	3.3 mm	1.0-3.39 mm
		K2269.3320		2.0-4.39 mm
		K2269.3810	3.8 mm	1.0-3.39 mm
		K2269.3820		2.0-4.39 mm
		K2269.3830	4.3 mm	3.0-5.39 mm
		K2269.4310		1.0-3.39 mm
		K2269.4320		2.0-4.39 mm
		K2269.4330		3.0-5.39 mm
		K2269.5010	5.0 mm	1.0-3.39 mm
		K2269.5020		2.0-4.39 mm
		K2269.5030		3.0-5.39 mm
	CAMLOG® Multi-unit abutment Try-in, straight Material Titanium alloy	J3564.3300	3.3 mm	-
		J3564.3800	3.8 mm	
		J3564.4300	4.3 mm	
		J3564.5000	5.0 mm	
	CAMLOG® Multi-unit abutment Try-in, 17° angled, type A Material Titanium alloy	K3566.3300	3.3 mm	-
		K3566.3800	3.8 mm	
		K3566.4300	4.3 mm	
		K3566.5000	5.0 mm	
	CAMLOG® Multi-unit abutment Try-in, 17° angled, type B Material Titanium alloy	K3567.3300	3.3 mm	-
		K3567.3800	3.8 mm	
		K3567.4300	4.3 mm	
		K3567.5000	5.0 mm	
	CAMLOG® Multi-unit abutment Try-in, 30° angled, type A Material Titanium alloy	K3568.3300	3.3 mm	-
		K3568.3800	3.8 mm	
		K3568.4300	4.3 mm	
		K3568.5000	5.0 mm	
	CAMLOG® Multi-unit abutment Try-in, 30° angled, type B Material Titanium alloy	K3569.3300	3.3 mm	-
		K3569.3800	3.8 mm	
		K3569.4300	4.3 mm	
		K3569.5000	5.0 mm	

Multi-unit System

New

	Article	Art. No.	Dimension
	Orientation gauge for Ø 2.0 mm pilot drill hole Material Nitinol	J3551.0001	-
	Aligning tool for angled abutments, for insertion posts	J2269.0005	17°
	Material Stainless steel	J2269.0006	30°
	Healing cap for Multi-unit abutment Material Titanium alloy	PXMUCC	Height 3.9 mm
	Healing cap for Multi-unit abutment, wide body 2 units Material PEEK/titanium alloy	PXMUCC	Height 5.1 mm
	Impression cap for Multi-unit abutment, open tray incl. holding screw blue anodized Material Titanium alloy	PXMUDPC	Height 8.9 mm
	Impression cap for Multi-unit abutment, closed tray Material Titanium alloy	PXMUIC	Length 8 mm
	Titanium scanbody for Multi-unit abutment* Material Titanium alloy	PXMUTSB	-

* Please check whether the Scanbody is available for Multi-unit abutments in the CAD library used.
 CAD libraries for selected CAMLOG® Prosthetic components are available for free download at:
www.biohorizonscamlog.com/cad-libraries

	Article	Art. No.
	<p>Multi-unit lab analog for cast models</p> <p>Material Titanium alloy</p>	PXMUAR
	<p>Multi-unit implant analog for printed and cast models</p> <p>Material Stainless steel</p>	J3026.4800
	<p>Titanium coping for Multi-unit abutment incl. prosthetic screw, regular, for Multi-unit abutment, blue anodized</p> <p>Material Titanium alloy</p>	PXMUTC
	<p>Titanium coping for Multi-unit abutment, short incl. prosthetic screw, short, for Multi-unit abutment, blue anodized</p> <p>Material Titanium alloy</p>	PXMUTCS
	<p>Bonding base with plastic sleeve, burn-out, Passive-Fit, for Multi-unit abutment incl. two prosthetic screws, regular and long, for Multi-unit abutment, blue anodized</p> <p>Material Titanium alloy/Delrin</p>	PXMUPFC
	<p>Plastic coping for Multi-unit abutment, burn-out incl. prosthetic screw, regular, for Multi-unit abutment, blue anodized</p> <p>Material Delrin</p>	PXMUPC
	<p>Gold coping for Multi-unit abutment, cast-on incl. prosthetic screw, regular, for Multi-unit abutment, blue anodized</p> <p>Material Cast-on gold alloy/Delrin</p>	PXMUGC

Multi-unit System

New

	Article	Quantity	Size	Art. No.	Ø	Thread
	ODSecure® Attachment for Multi-unit abutment* Ø 4.8 mm	1	-	J2273.4801	-	-
	Material Titanium alloy					
	Polishing protection for Multi-unit caps and bases	5	-	PXMUPA	-	-
	Material Titanium alloy					
	CAMLOG® Abutment screw with reduced head, hex, light blue anodized	1	-	J4004.1601	3.3 mm 3.8 mm 4.3 mm	M1.6
	Material Titanium alloy			J4004.2001	5.0 mm	M2.0
	CAMLOG® Lab screw with reduced head, hex, partially light blue anodized	1	-	J4004.1600	3.3 mm 3.8 mm 4.3 mm	M1.6
	Material Titanium alloy			J4004.2000	5.0 mm	M2.0
	Prosthetic screw for Multi-unit abutment Hex, blue anodized, also for Passive Fit	1	short	PXMUPSS1	-	M1.4
		5		PXMUPSS		
		1	regular	PXMUPSR1		
		5		PXMUPSR		
		5	long	PXMUPSL		

* Auxiliary articles for OD Secure page 88.

	Article	Art. No.	Type	Ø	GH	PP Ø
	CAMLOG® Bar abutment, straight sterile Material Titanium alloy	J2254.3305	-	3.3 mm	0.5 mm	4.3 mm
		J2254.3320			2.0 mm	
		J2254.3805			0.5 mm	
		J2254.3820		3.8 mm	2.0 mm	
		J2254.3840			4.0 mm	
		J2254.4305			0.5 mm	
		J2254.4320		4.3 mm	2.0 mm	
		J2254.4340			4.0 mm	
		J2254.5005		5.0 mm	0.5 mm	6.0 mm
		J2254.5020			2.0 mm	
		J2254.5040			4.0 mm	
	CAMLOG® Bar abutment, 17° angled incl. light blue anodized CAMLOG® Abutment screw with reduced head, hex, sterile Material Titanium alloy	K2256.3325	A	3.3 mm	1.2-2.5 mm	4.3 mm
		K2256.3340			2.7-4.0 mm	
		K2257.3325			1.2-2.5 mm	
		K2257.3340			2.7-4.0 mm	
		K2256.3825	A	3.8 mm	1.2-2.5 mm	
		K2256.3840			2.7-4.0 mm	
		K2257.3825			1.2-2.5 mm	
		K2257.3840			2.7-4.0 mm	
		K2256.4325	A	4.3 mm	1.2-2.5 mm	
		K2256.4340			2.7-4.0 mm	
		K2257.4325			1.2-2.5 mm	
		K2257.4340			2.7-4.0 mm	
		K2256.5025	A	5.0 mm	0.7-2.5 mm	6.0 mm
		K2256.5040			2.2-4.0 mm	
		K2257.5025			0.7-2.5 mm	
		K2257.5040			2.2-4.0 mm	
	CAMLOG® Bar abutment, 30° angled incl. light blue anodized CAMLOG® Abutment screw with reduced head, hex, sterile Material Titanium alloy	K2258.3325	A	3.3 mm	0.3-2.5 mm	4.3 mm
		K2258.3340			1.8-4.0 mm	
		K2259.3325			0.3-2.5 mm	
		K2259.3340			1.8-4.0 mm	
		K2258.3825	A	3.8 mm	0.3-2.5 mm	
		K2258.3840			1.8-4.0 mm	
		K2259.3825			0.3-2.5 mm	
		K2259.3840			1.8-4.0 mm	
		K2258.4325	A	4.3 mm	0.3-2.5 mm	
		K2258.4340			1.8-4.0 mm	
		K2259.4325			0.3-2.5 mm	
		K2259.4340			1.8-4.0 mm	
		K2258.5035	A	5.0 mm	0.5-3.5 mm	6.0 mm
		K2258.5050			2.0-5.0 mm	
		K2259.5035			0.5-3.5 mm	
		K2259.5050			2.0-5.0 mm	

Type A and B see page 8

The CAMLOG® Abutment screw with reduced head, hex is tightened with the screwdrivers, hex (see page 98).


	Article	Size	Art. No.	\varnothing			Dimensions	
	Driver for straight bar abutments Material Stainless steel	short	J5300.0020	3.3 mm			18.6 mm	
				3.8 mm				
		long		4.3 mm				
		J5300.0025	5.0 mm					
	Orientation gauge for \varnothing 2.0 mm pilot drill hole Material Nitinol	-	J3551.0001	3.3 mm			-	
				3.8 mm				
				4.3 mm				
	Aligning tool for angled abutments, for insertion posts Material Stainless steel	-	J2269.0005				17°	
							30°	
			J2269.0006					
	Healing cap for bar abutment partially light blue anodized, sterile Material Titanium alloy	-	J2029.4300	3.3 mm	3.8 mm	4.3 mm	-	
				5.0 mm	6.0 mm			
			J2029.6000					
	Scanning cap for bar abutments* incl. prosthetic screw light blue anodized, sterile Material PEEK	-	J2610.4300	3.3 mm	3.8 mm	4.3 mm	-	
				5.0 mm	6.0 mm			
			J2610.6000					
	Scanning cap for bar abutments, multi-use* incl. prosthetic screw light blue anodized, multi-use Material Titanium alloy	-	J2630.4300	3.3 mm	3.8 mm	4.3 mm	-	
				5.0 mm	6.0 mm			
			J2630.6000					
	Impression cap for bar abutment, closed tray (bridge) partially light blue anodized, sterile Material Titanium alloy	short	J2129.4300	3.3 mm	3.8 mm	4.3 mm	6.5 mm	
			J2129.6000	5.0 mm	6.0 mm		7.0 mm	
		long	J2129.4310	3.3 mm	3.8 mm	4.3 mm	11.0 mm	
			J2129.6010	5.0 mm	6.0 mm			

* Please check whether the scan cap for bar abutments is available in the CAD library used.

CAD libraries for selected CAMLOG® Prosthetic components are available for free download at:
www.biohorizonscamlog.com/cad-libraries

	Article	Art. No.	Ø			Dimensions
	Driver for impression post and healing cap for bar abutments	J5300.0027	3.3 mm	3.8 mm	4.3 mm	19.1 mm
	Material Stainless steel	J5300.0028	5.0 mm	6.0 mm		
	Bar lab analog for bar abutments, for cast models	J3020.4300	3.3 mm	3.8 mm	4.3 mm	-
	Material Stainless steel	J3020.6000	5.0 mm	6.0 mm		
	Bar implant analog for bar abutments, for printed and cast models	J3025.4300	3.3 mm	3.8 mm	4.3 mm	-
	Material Stainless steel	J3025.6000	5.0 mm	6.0 mm		
	Titanium cap for bar abutment, for crown incl. prosthetic screw light blue anodized, sterile	J2259.4301	3.3 mm	3.8 mm	4.3 mm	-
	Material Titanium alloy	J2259.6001	5.0 mm	6.0 mm		
	Titanium cap for bar abutment, for bridge incl. prosthetic screw light blue anodized, sterile	J2259.4302	3.3 mm	3.8 mm	4.3 mm	-
	Material Titanium alloy	J2259.6002	5.0 mm	6.0 mm		
	Titanium cap without retention for bar abutment, for bridge incl. prosthetic screw light blue anodized	J2259.4322	3.3 mm	3.8 mm	4.3 mm	-
	Material Titanium alloy	J2259.6022	5.0 mm	6.0 mm		
	Titanium bonding base for bar abutment Passive-Fit	J2260.4301	3.3 mm	3.8 mm	4.3 mm	-
	Material Titanium alloy	J2260.6001	5.0 mm	6.0 mm		
	Bar sleeve for titanium bonding base burn-out, Passive-Fit, incl. prosthetic screw for bar abutments, hex (only for fabrication of the cast framework in conjunction with bar sleeves for titanium bonding base Passive-Fit)	J2261.4301	3.3 mm	3.8 mm	4.3 mm	-
	Material POM	J2261.6001	5.0 mm	6.0 mm		
	Crown base for bar abutment burn-out	J2256.4306	3.3 mm	3.8 mm	4.3 mm	-
	Material POM	J2256.6006	5.0 mm	6.0 mm		

	Article	Art. No.	Ø			Thread	Dimensions
	Base for bar abutment burn-out	J2257.4301	3.3 mm	3.8 mm	4.3 mm	-	-
	Material POM	J2257.6001	5.0 mm	6.0 mm	-	-	-
	Reworking reamer, for base for bar abutment plane surface, burn-out	J3711.0010	3.3 mm	3.8 mm	4.3 mm	-	-
	Material Stainless steel/Brass	J3711.0015	5.0 mm	6.0 mm	-	-	-
	Reworking reamer, for base for bar abutment screw seat, burn-out	J3711.0020	3.3 mm	3.8 mm	4.3 mm	-	-
	Material Stainless steel/Brass	J3711.0025	5.0 mm	6.0 mm	-	-	-
	Base for bar abutment cast-on	J2263.4300	3.3 mm	3.8 mm	4.3 mm	-	approx. 0.48 g
	Material Cast-on gold alloy/POM	J2263.6000	5.0 mm	6.0 mm	-		approx. 0.70 g
	Base for bar abutment solderable	J2258.4300	3.3 mm	3.8 mm	4.3 mm	-	-
	Material Solderable gold alloy	J2258.6000	5.0 mm	6.0 mm	-	-	-
	Base for bar abutment, titanium laser-weldable	J2262.4300	3.3 mm	3.8 mm	4.3 mm	-	-
	Material Titanium Grade 4	J2262.6000	5.0 mm	6.0 mm	-		
	Polishing protection for caps and bases for bar abutment	J3021.4300	3.3 mm	3.8 mm	4.3 mm	M1.6	-
	Material Titanium alloy	J3021.6000	5.0 mm	6.0 mm	-	M2.0	

	Article	Art. No.	Ø			Length	Thread
	CAMLOG® Abutment screw with reduced head, hex, light blue anodized	J4004.1601	3.3 mm	3.8 mm	4.3 mm	-	M1.6
	Material Titanium alloy	J4004.2001	5.0 mm				M2.0
	CAMLOG® Lab screw with reduced head, hex, partially light blue anodized	J4004.1600	3.3 mm	3.8 mm	4.3 mm	-	M1.6
	Material Titanium alloy	J4004.2000	5.0 mm				M2.0
	Prosthetic screw for bar abutments hex, light blue anodized (for final fixation of the restoration)	J4012.1601	3.3 mm	3.8 mm	4.3 mm	-	M1.6
	Material Titanium alloy	J4012.2001	5.0 mm	6.0 mm			M2.0
	Lab prosthetic screw for bar abutment, hex, brown anodized	J4013.1601	3.3 mm	3.8 mm	4.3 mm	-	M1.6
	Material Titanium alloy	J4013.2001	5.0 mm	6.0 mm			M2.0
	Screw, hex for bar abutment, light blue anodized, sterile	J4012.1610	-			10 mm	M1.6
	Material Titanium alloy	J4012.2010					M2.0
		J4012.1615				15 mm	M1.6
		J4012.2015					M2.0
		J4012.1620				20 mm	M1.6
		J4012.2020					M2.0
	PEEK screw for bar abutment hex, length 27 mm, sterile	J4009.1627	-			-	M1.6
	Material PEEK	J4009.2027					M2.0

Lab screws may not be used on patients!

The CAMLOG® Abutment screws (M1.6/M2.0) and the prosthetic screws for bar abutments (M1.6/M2.0) are tightened using the screwdrivers, hex (see page 98).

Ball abutment

	Article	Art. No.	\varnothing	GH	L
	CAMLOG® Ball abutments, male part incl. stabilizing ring Material Titanium alloy/Plastic	J2249.3315	3.3 mm	1.5 mm	-
		J2249.3330		3.0 mm	
		J2249.3815	3.8 mm	1.5 mm	
		J2249.3830		3.0 mm	
		J2249.3845		4.5 mm	
		J2249.4315		1.5 mm	
		J2249.4330	4.3 mm	3.0 mm	
		J2249.4345		4.5 mm	
		J2249.5015	5.0 mm	1.5 mm	
		J2249.5030		3.0 mm	
		J2249.5045		4.5 mm	
	Driver for ball abutment, manual/wrench Material Stainless steel	J5300.0011	-	-	18.3 mm
	Matrix CM Dalbo®-Plus for ball abutment, incl. lamella retention insert and duplicating aid Material Titanium Grade 4/Gold alloy	05003503	3.3 mm	-	-
			3.8 mm		
			4.3 mm		
			5.0 mm		
	Lamella retention insert for matrix CM Dalbo®-Plus Material Gold alloy	05003504	3.3 mm	-	-
			3.8 mm		
			4.3 mm		
			5.0 mm		
	Screwdriver activator for ball abutment matrix CM Dalbo®-Plus Material Stainless steel	07000389	-	-	-
	Model analog for ball abutment incl. stabilizing ring Material Titanium alloy/Plastic	J3015.3300	3.3 mm	-	-
		J3015.3800	3.8 mm		
		J3015.4300	4.3 mm		
		J3015.5000	5.0 mm		

Dalbo®-Plus is a registered trademark of Cendres + Métaux SA, Biel, Switzerland.

	Article	Quantity	Art. No.	Ø	GH
 <p>2.5 mm GH</p>		CAMLOG® ODSecure® Abutment	1	3.3 mm	1.0 mm
			J2273.3310		2.0 mm
			J2273.3320		3.0 mm
			J2273.3330		4.0 mm
			J2273.3340		5.0 mm
			J2273.3350		6.0 mm
			J2273.3360		
			J2273.3810	3.8 mm	1.0 mm
			J2273.3820		2.0 mm
			J2273.3830		3.0 mm
			J2273.3840		4.0 mm
			J2273.3850		5.0 mm
			J2273.3860		6.0 mm
		1	J2273.4310	4.3 mm	1.0 mm
			J2273.4320		2.0 mm
			J2273.4330		3.0 mm
			J2273.4340		4.0 mm
			J2273.4350		5.0 mm
			J2273.4360		6.0 mm
		1	J2273.5010	5.0 mm	1.0 mm
			J2273.5020		2.0 mm
			J2273.5030		3.0 mm
			J2273.5040		4.0 mm
			J2273.5050		5.0 mm
			J2273.5060		6.0 mm
		1	J2273.4801	-	-
		2	ODSIC	-	-
		2	ODSA	-	-
		2	ODS-CAK	-	-

	Article	Quantity	Color	Retention	Divergence	Art. No.
	ODSecure® Xtend housing cap yellow anodized, incl. Lab processing insert Material Titanium alloy/Nylon	2	-	-	0°–50°	ODS-XH
	ODSecure® Housing cap pink anodized, incl. Lab processing insert Material Titanium alloy/Nylon	2	-	-	0°–30°	ODS-HCPM
	ODSecure® Retention cap insert Material Nylon	4	purple	Hard approx. 6 lbs/2.7 kg	-	ODSRC-V
			clear	Medium approx. 4 lbs/1.8 kg		ODSRC-C
			pink	Soft approx. 2.5 lbs/1.2 kg		ODSRC-P
			yellow	Extra soft approx 1.5 lbs/0.6 kg		ODSRC-Y
	ODSecure® Cap extractor tool Material Stainless steel/Nylon	1	-	-	-	ODSCT
	ODSecure® Block-out spacer clear Material Silicone	4	-	-	-	ODS-BS
	ODSecure® Lab processing insert Material Nylon	4	black	-	-	ODS-PM
	ODSecure® Castable male castable Material Polystyrene	2	-	-	-	ODSCM

Locator®

	Article	Quantity	Art. No.	Ø	GH	L
	CAMLOG® Locator® Abutment Material Titanium alloy/TiN	1	J2253.3310 J2253.3320 J2253.3330 J2253.3340 J2253.3810 J2253.3820 J2253.3830 J2253.3840 J2253.3850 J2253.4310 J2253.4320 J2253.4330 J2253.4340 J2253.4350 J2253.5010 J2253.5020 J2253.5030 J2253.5040 J2253.5050	3.3 mm 3.8 mm 4.3 mm 5.0 mm	1.0 mm 2.0 mm 3.0 mm 4.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm	-
	Driver for Locator® Abutments manual/wrench Material Stainless steel	1	J2253.0001	-	-	24.3 mm
	Locator® Instrument threepart Material Stainless steel	1	J2253.0002	-	-	83.0 mm
	Locator® Abutment holder sleeve for golden component of the Locator® Instrument Material Polysulfone	4	08394	-	-	-
	Locator® Impression cap Material Aluminum/Polyethylene	4	J2253.0200	-	-	-
	Locator® Analog Material Aluminum	4	J2253.0340 J2253.0350	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-	-
	Locator® Block out spacer Material Teflon	20	J2253.0401	-	-	-

	Article	Quantity	Color	Retention	Divergence	Art. No.
	Locator® Processing replacement male Material Polyethylene	4	-	-	-	J2253.0402
	Locator® Male processing package Content per kit: 1 Retention housing with processing replacement male 1 Block out spacer white 1 Replacement male clear 1 Replacement male pink 1 Replacement male blue Material Titanium alloy/Polyethylene/Teflon/Nylon	2	-	-	-	J2253.0102
	Locator® Male processing package for extended range Content per kit: 1 Retention housing with processing replacement male 1 Block out spacer white 1 Replacement male green 1 Replacement male orange 1 Replacement male red Material Titanium alloy/Polyethylene/Teflon/Nylon	2	-	-	-	J2253.0112*
	Locator® Replacement male Material Nylon	4	clear	strong	0°–10°	J2253.1005
			pink	medium		J2253.1003
			blue	light		J2253.1002
	Locator® Replacement male for extended range Material Nylon	4	green	strong	10°–20°	J2253.2004*
			orange	medium		J2253.2003*
			red	light		J2253.2002*
			gray	none	0°–20°	J2253.2000*


* not permitted for Implant Ø 3.3 mm

Manufacturer Locator®: Zest Anchors | 2875 Loker Avenue East, Carlsbad | California 92010 | USA
Locator® and Locator R-Tx® are registered trademarks of Zest Anchors.

Locator®

	Article	Quantity	Art. No.
	Locator® Angle measurement guide Material Stainless steel	1	J2253.0003
	Locator® Parallel post Material Polyethylene	4	J2253.0004

Locator R-Tx®

	Article	Quantity	Color	Art. No.	Ø	GH
	CAMLOG® Locator R-Tx® Abutment incl. titanium housing with processing replacement male black, block-out spacer white and four different retention inserts Material Titanium alloy/Nylon	1	-	30800-01 30800-02 30800-03 30800-04 30801-01 30801-02 30801-03 30801-04 30801-05 30802-01 30802-02 30802-03 30802-04 30802-05 30803-01 30803-02 30803-03 30803-04 30803-05	3.3 mm 3.8 mm 4.3 mm 5.0 mm	1.0 mm 2.0 mm 3.0 mm 4.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm 1.0 mm 2.0 mm 3.0 mm 4.0 mm 5.0 mm
	Locator R-Tx® Impression coping Material Polyethylene	4	-	30017-01	-	-
	Locator R-Tx® Analog Material Aluminum	4	-	30014-01 30015-01 30016-01	3.3 mm 3.8 mm 4.3 mm 5.0 mm	-
	Locator R-Tx® Titanium housing with processing insert Material Titanium alloy/Polyethylene	4	black	30013-01	-	-
	Locator® Block out spacer Material Teflon	20	white	J2253.0401	-	-
	Locator R-Tx® Processing insert Material Polyethylene	4	black	30012-01	-	-

	Article	Quantity	Color	Retention	Art. No.	Ø
	Locator R-Tx® Processing spacer Material Polyethylene	4	-	-	30018-01	-
	Locator R-Tx® Retention insert Material Nylon	4	gray	none	30001-01	-
		4	blue	light	30002-01	
		4	pink	medium	30003-01	
		4	white	strong	30004-01	
	Locator R-Tx® Retention insert tool with plastic grip Material Stainless steel	1	-	-	30021-01	-

The CAMLOG® Locator R-Tx® Abutments are tightened with the screwdrivers, hex (see page 98).

Abutment and lab screws

	Article	Quantity	Size	Art. No.	Ø	Thread
	CAMLOG® Abutment screw, hex Material Titanium alloy	1	-	J4005.1601	3.3 mm 3.8 mm 4.3 mm	M1.6
				J4005.2001	5.0 mm 6.0 mm	M2.0
	CAMLOG® Lab screw, hex brown anodized Material Titanium alloy	1	-	J4006.1601	3.3 mm 3.8 mm 4.3 mm	M1.6
				J4006.2001	5.0 mm 6.0 mm	M2.0
		3	-	J4006.1603	3.3 mm 3.8 mm 4.3 mm	M1.6
				J4006.2003	5.0 mm 6.0 mm	M2.0
	CAMLOG® Abutment screw* with reduced head, hex, light blue anodized Material Titanium alloy	1	-	J4004.1601	3.3 mm 3.8 mm 4.3 mm	M1.6
				J4004.2001	5.0 mm	M2.0
	CAMLOG® Lab screw* with reduced head, hex, partially light blue anodized Material Titanium alloy	1	-	J4004.1600	3.3 mm 3.8 mm 4.3 mm	M1.6
				J4004.2000	5.0 mm	M2.0
	Prosthetic screw for Multi-unit abutment hex, blue anodized, also for Passive Fit Material Titanium alloy	1	short	PXMUPSS1	-	M1.4
		5		PXMUPSS		
		1	regular	PXMUPSR1		
		5		PXMUPSR		
		5	long	PXMUPSL		

* for angled CAMLOG® Multi-unit abutment and angled CAMLOG® Bar abutment

The CAMLOG® Abutment screws (M1.6/M2.0) are tightened with the ballpoint screwdrivers (see page 70 for angled screw channels) and with the screwdrivers, hex (for straight screw channels) (see page 98).

Lab screws may not be used on patients!

	Article	Quantity	Art. No.	Ø	Thread
	Prosthetic screw for bar abutments hex, light blue anodized (for final fixation of the restoration)	1	J4012.1601	3.3 mm	M1.6
	Material Titanium alloy			3.8 mm	
		1		4.3 mm	
		J4012.2001	5.0 mm	M2.0	
	Lab prosthetic screw for bar abutment, hex, brown anodized	1	J4013.1601	3.8 mm	M1.6
	Material Titanium alloy			4.3 mm	
		1		5.0 mm	M2.0
		J4013.2001	6.0 mm		

Lab screws may not be used on patients!

Prosthetic instruments

	Article	Size	Art. No.	Ø	L
	Torque wrench until maximal 30 Ncm	-	J5320.1030	-	-
	Material Stainless steel				
	Gingival height indicator, straight		J3550.3300	3.3 mm	
			J3550.3800	3.8 mm	
	Material Titanium alloy		J3550.4300	4.3 mm	
			J3550.5000	5.0 mm	
	Screwdriver hex, manual/wrench	extra short	J5317.0510		14.5 mm
		short	J5317.0501		22.5 mm
	Material Stainless steel	long	J5317.0502		30.3 mm
	Screwdriver hex, ISO shaft	short	J5317.0504		18.0 mm
	Material Stainless steel	long	J5317.0503		26.0 mm
	Adapter ISO shaft for angled hand piece/wrench	-	J5002.0011	-	21.0 mm
	Material Stainless steel				
	Wrench adapter				
	Material Stainless steel		J5002.0013	-	12.5 mm
	Prosthetic tray universal (without content) sterilizable	-	J5330.8700	-	162 x 73 x 29 mm
	Material Radel®, silicone				

Instruments for dental technicians

	Article	Art. No.	Ø
	Handle for implant analog Material Stainless steel	J3025.0010	3.3 mm 3.8 mm 4.3 mm
		J3025.0015	5.0 mm 6.0 mm
	CAMLOG® Universal holder set incl. 2 CAMLOG® Lab screws, hex, and 1 CAMLOG® Abutment collet each Material Stainless steel/Titanium alloy	J3709.0010	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm
	Universal holder Material Stainless steel	J3709.0015	-
	CAMLOG® Abutment collets for universal holder Material Titanium alloy	J3709.3300 J3709.3800 J3709.4300 J3709.5000 J3709.6000	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm
	Reamers for dilating the plaster model, for universal holder incl. color-coded guide pin Material Stainless steel/Titanium alloy	J3706.3300 J3706.3800 J3706.4300 J3706.5000 J3706.6000	3.3 mm 3.8 mm 4.3 mm 5.0 mm 6.0 mm

Selection abutments

	Article	Art. No.
	CAMLOG® Selection abutment kit (Content: 2 units each, according to table below)	K8011.1000

Content: CAMLOG® Selection abutment kit					
Article	Material	Ø	Ø	Ø	GH
CAMLOG® Esthomic® Selection abutment, straight*	POM	3.8 mm	4.3 mm	5.0 mm	1.0-1.8
CAMLOG® Esthomic® Selection abutment, 15° angled, type A*					3.0-4.5
CAMLOG® Esthomic® Selection abutment, 15° angled, type B*					1.0-1.8
CAMLOG® Esthomic® Selection abutment, 20° angled, type A*					
CAMLOG® Esthomic® Selection abutment, 20° angled, type B*					

* These products are not available singly.

Attention, do not use selection abutments on patients!

Auxiliary article



Implants for practice

	Article	Art. No.	Ø	L
	CAMLOG® PROGRESSIVE-LINE Implant for practice incl. snap-in insertion post and cover screw, brown anodized	K1901.3813	3.8 mm	13 mm
	Material Titanium alloy	K1901.4313	4.3 mm	
	CAMLOG® SCREW-LINE Implant for practice incl. snap-in insertion post and cover screw, brown anodized	K1049.3813	3.8 mm	13 mm
	Material Titanium alloy	K1049.4313	4.3 mm	

Attention, do not use Implants for practice on patients!

Insertion posts

	Article	Quantity	Art. No.	Ø
	CAMLOG® Insertion post, screw-mounted for CAMLOG® Lab implant/implant analog, incl. fixing screw	2	K2026.3303	3.3 mm
	Material Titanium alloy		K2026.3803	3.8 mm
			K2026.4303	4.3 mm
			K2026.5003	5.0 mm

Demonstration models

	Article	Art. No.
	<p>CAMLOG® Demonstration model, acrylic glass upper jaw, 4 CAMLOG® SCREW-LINE Implants, 4 × Ø 4.3 mm</p> <p>Material Acrylic glass/Titanium</p>	K8070.1020
	<p>CAMLOG® Demonstration model, acrylic glass lower jaw, 4 CAMLOG® SCREW-LINE Implants, 4 × Ø 4.3 mm</p> <p>Material Acrylic glass/Titanium</p>	K8050.1040
	<p>Edentulous mandible incl. mounting plate</p> <p>Material Plastic</p>	J8070.2050

Macro models


	Article	Art. No.
	<p>CAMLOG® PROGRESSIVE-LINE Macro model Scale 3:1</p> <p>Content: 1 CAMLOG® PROGRESSIVE-LINE Implant 1 CAMLOG® Esthomic® Abutment, straight 1 CAMLOG® Abutment screw, hex 1 CAMLOG® Screwdriver, hex 1 Premolar, suitable for CAMLOG® Esthomic® Abutment, straight 1 Acrylic base</p> <p>Material Plastic/Stainless steel</p>	K8010.1400
	<p>CAMLOG® SCREW-LINE Macro model Scale 3:1</p> <p>Content: 1 CAMLOG® SCREW-LINE Implant 1 CAMLOG® Esthomic® Abutment, straight 1 CAMLOG® Abutment screw, hex 1 Screwdriver, hex 1 Premolar, suitable for CAMLOG® Esthomic® Abutment, straight 1 Acrylic base</p> <p>Material Plastic/Stainless steel</p>	K8010.1010

Literature

	Article	Media No. / Art. No.
	Patient brochure Dental implants – inspired by nature	M-0431-BRO-EN-INT- CL-00-052023
	COMFOUR® Patient brochure Bridge instead of dentures – dental prosthesis with feel-good factor	M-0431-BRO-EN-INT- CL-00-052023
	Biomaterial patient brochure Stable bone and a firm gingiva – the basis of oral health	M-0151-BRO-EN-INT- BHCL-00-052023
	Implant pass Patient Documentation and Implant Card	J8000.0372
	Patient advice sheets Set, A4	M-0584-FLY-EN-INT- BHCL-00-052023

	Article	Media No.
	Presentation folder A4, laminated	M-0258-BUE-EN-INT- BHCL-00-052023
	Poster Format: 50 x 70 cm	M-1628-PST-EN-INT- BHCL-00-052023
	Appointment pad 50 sheets/pad, A7 Packaging units: 5 units	M-1629-FOR-EN-INT- BHCL-00-052023

Indication overview

Single-tooth restoration		Bridge
Cemented	Screwed	Cemented
		
Temporary abutments, PEEK, incl. PS	Temporary abutments, PEEK, incl. PS	Temporary abutments, PEEK, incl. PS
		
Esthomic® Abutments, incl. PS	Temporary abutment, crown, titanium alloy	Esthomic® Abutments, incl. PS
		
Titanium bases CAD/CAM, crown, incl. PS	Bar abutments	
		
Titanium bases CAD/CAM free, incl. PS	Titanium bases CAD/CAM, crown, incl. PS	
 		 
Universal abutment, incl. PS		Universal abutment, incl. PS
CAM blanks		CAM blanks
		
Gold-plastic abutment	Gold-plastic abutment	Gold-plastic abutment

restoration	Hybrid restoration	
Screwed	Removable (full denture)	
		
Temporary abutments Titanium alloy, bridge		
		
Bar abutments	Multi-unit Abutments	
		
Titanium bases CAD/CAM, bridge		
		
	Locator® Anchoring system	ODSecure® System
		
		Ball abutment
Double crown restoration		
	Universal abutment, incl. PS	CAM blanks
		
		Telescope abutment
		
		Gold-plastic abutment
		
		Titanium base CAD/CAM, crown, incl. PS

Implant overview

PROGRESSIVE-LINE

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	L
 CAMLOG® PROGRESSIVE-LINE Implant, Promote® plus with snap-in insertion post	-	K1076.3809	K1076.4309	K1076.5009	9 mm
	K1076.3311	K1076.3811	K1076.4311	K1076.5011	11 mm
	K1076.3313	K1076.3813	K1076.4313	K1076.5013	13 mm
	K1076.3316	K1076.3816	K1076.4316	K1076.5016	16 mm
 CAMLOG® PROGRESSIVE-LINE Implant, Promote® plus with screw-mounted insertion post	-	K1075.3809	K1075.4309	K1075.5009	9 mm
	K1075.3311	K1075.3811	K1075.4311	K1075.5011	11 mm
	K1075.3313	K1075.3813	K1075.4313	K1075.5013	13 mm
	K1075.3316	K1075.3816	K1075.4316	K1075.5016	16 mm

SCREW-LINE

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	L
 CAMLOG® SCREW-LINE Implant, Promote® with snap-in insertion post	-	K1046.3809	K1046.4309	K1046.5009	K1046.6009	9 mm
	K1046.3311	K1046.3811	K1046.4311	K1046.5011	K1046.6011	11 mm
	K1046.3313	K1046.3813	K1046.4313	K1046.5013	K1046.6013	13 mm
	K1046.3316	K1046.3816	K1046.4316	K1046.5016	K1046.6016	16 mm
 CAMLOG® SCREW-LINE Implant, Promote® plus with snap-in insertion post	-	K1056.3809	K1056.4309	K1056.5009	K1056.6009	9 mm
	K1056.3311	K1056.3811	K1056.4311	K1056.5011	K1056.6011	11 mm
	K1056.3313	K1056.3813	K1056.4313	K1056.5013	K1056.6013	13 mm
	K1056.3316	K1056.3816	K1056.4316	K1056.5016	K1056.6016	16 mm
 CAMLOG® SCREW-LINE Implant, Promote® with screw-mounted insertion post	-	K1045.3809	K1045.4309	K1045.5009	-	9 mm
	K1045.3311	K1045.3811	K1045.4311	K1045.5011		11 mm
	K1045.3313	K1045.3813	K1045.4313	K1045.5013		13 mm
	K1045.3316	K1045.3816	K1045.4316	-		16 mm
 CAMLOG® SCREW-LINE Implant, Promote® plus with screw-mounted insertion post	-	K1055.3809	K1055.4309	K1055.5009	-	9 mm
	K1055.3311	K1055.3811	K1055.4311	K1055.5011		11 mm
	K1055.3313	K1055.3813	K1055.4313	K1055.5013		13 mm
	K1055.3316	K1055.3816	K1055.4316	-		16 mm

Prosthetics overview

Healing caps

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Healing cap, cylindrical	J2015.3320	J2015.3820	J2015.4320	J2015.5020	J2015.6020	2.0 mm
	J2015.3340	J2015.3840	J2015.4340	J2015.5040	J2015.6040	4.0 mm
	J2015.3360	J2015.3860	J2015.4360	J2015.5060	J2015.6060	6.0 mm
 CAMLOG® Healing cap, wide body	J2014.3320	J2014.3820	J2014.4320	J2014.5020	J2014.6020	2.0 mm
	J2014.3340	J2014.3840	J2014.4340	J2014.5040	J2014.6040	4.0 mm
	-	J2014.3860	J2014.4360	J2014.5060	J2014.6060	6.0 mm
 CAMLOG® Healing cap, wide body, narrow emergence	J2024.3340	J2024.3840	J2024.4340	J2024.5040	J2024.6040	4.0 mm
	J2024.3360	J2024.3860	J2024.4360	J2024.5060	J2024.6060	6.0 mm
 CAMLOG® Healing cap, bottleneck	J2011.3340	J2011.3840	J2011.4340	J2011.5040	J2011.6040	4.0 mm
	-	J2011.3860	J2011.4360	J2011.5060	J2011.6060	6.0 mm
 PS CAMLOG® Healing cap PS, cylindrical	-	K2005.3820	K2005.4320	K2005.5020	K2005.6020	2.0 mm
	-	K2005.3840	K2005.4340	K2005.5040	K2005.6040	4.0 mm
	-	K2005.3860	K2005.4360	K2005.5060	K2005.6060	6.0 mm
 PS CAMLOG® Healing cap PS, wide body	-	K2004.3840	K2004.4340	K2004.5040	K2004.6040	4.0 mm
	-	K2004.3860	K2004.4360	K2004.5060	K2004.6060	6.0 mm
 PS CAMLOG® Healing cap PS, bottleneck	-	K2001.3840	K2001.4340	K2001.5040	-	4.0 mm
	-	K2001.3860	K2001.4360	K2001.5060		6.0 mm

Digital implant impression taking

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Scanbody	K2610.3310	K2610.3810	K2610.4310	K2610.6010	K2610.6010	-
 CAMLOG® Scanbody multi-use	K2630.3300	K2630.3800	K2630.4300	K2630.6000	K2630.6000	-
 CAMLOG® ScanPosts for Sirona®	K2620.3306	K2620.3806	K2620.4306	K2620.5006	K2620.6006	-

Prosthetics overview

Conventional implant impression taking

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Impression post, cylindrical, open tray	K2125.3300	K2125.3800	K2125.4300	K2125.5000	K2125.6000	-
 CAMLOG® Impression post, cylindrical, closed tray	K2115.3300	K2115.3800	K2115.4300	K2115.5000	K2115.6000	-
 CAMLOG® Impression post, wide body, open tray	K2124.3300	K2124.3800	K2124.4300	K2124.5000	K2124.6000	-
 CAMLOG® Impression post, wide body, closed tray	K2114.3300	K2114.3800	K2114.4300	K2114.5000	K2114.6000	-
 CAMLOG® Impression post, wide body, narrow emergence, open tray	J2124.3301	J2124.3801	J2124.4301	J2124.5001	J2124.6001	-
 CAMLOG® Impression post, wide body, narrow emergence, closed tray	J2114.3301	J2114.3801	J2114.4301	J2114.5001	J2114.6001	-
 CAMLOG® Impression post PS, open tray	-	K2122.3800	K2122.4300	K2122.5000	K2122.6000	-
 CAMLOG® Impression post PS, closed tray	-	K2111.3800	K2111.4300	K2111.5000	K2111.6000	-

Bite registration

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Bite registration post	J2141.3300	J2141.3800	J2141.4300	J2141.5000	-	-

Cast fabrication

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Lab analog for cast models	K3010.3300	K3010.3800	K3010.4300	K3010.5000	K3010.6000	-
	K3010.3303	K3010.3803	K3010.4303	K3010.5003	-	
 CAMLOG® Implant analog for printed and cast models	K3025.3300	K3025.3800	K3025.4300	K3025.5000	K3025.6000	-
 DIM Analog® for the CAMLOG® Implant System for printed models	NT/JA-AN- 00/3D	CAM 5.DIM.380 / NT/JA-AR- 00/3D	NT/JA-AW- 00/3D	NT/JA-AX- 00/3D	NT/JA-AX- 00/3D	-

Abutments for crown and bridge restorations

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Temporary abutment, PEEK	-	K2241.3800	K2241.4300	K2241.5000	K2241.6000	-
 CAMLOG® Temporary abutment PS, PEEK, for Platform Switching	-	K2208.3800	K2208.4300	K2208.5000	K2208.6000	-
 CAMLOG® Temporary abutment, crown	K2239.3300	K2239.3800	K2239.4300	K2239.5000	K2239.6000	-
 CAMLOG® Temporary abutment, bridge	J2339.3300	J2339.3800	J2339.4300	J2339.5000	J2339.6000	-

Prosthetics overview

Abutments for crown and bridge restorations

Article		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Esthomic® Abutments, straight	-		K2226.3810	K2226.4310	K2226.5010	K2226.6010	1.0–1.8 mm
			K2226.3830	K2226.4330	K2226.5030	K2226.6030	3.0–4.5 mm
 CAMLOG® Esthomic® Abutments, 15° angled, type A	-		K2227.3810	K2227.4310	K2227.5010	K2227.6010	1.0–1.8 mm
			K2227.3830	K2227.4330	K2227.5030	K2227.6030	3.0–4.5 mm
 CAMLOG® Esthomic® Abutments, 15° angled, type B	-		K2228.3810	K2228.4310	K2228.5010	K2228.6010	1.0–1.8 mm
			K2228.3830	K2228.4330	K2228.5030	K2228.6030	3.0–4.5 mm
 CAMLOG® Esthomic® Abutments, 20° angled, type A	-		K2231.3810	K2231.4310	K2231.5010	K2231.6010	1.0–1.8 mm
			K2231.3830	K2231.4330	K2231.5030	K2231.6030	3.0–4.5 mm
 CAMLOG® Esthomic® Abutments, 20° angled, type B	-		K2232.3810	K2232.4310	K2232.5010	K2232.6010	1.0–1.8 mm
			K2232.3830	K2232.4330	K2232.5030	K2232.6030	3.0–4.5 mm
  CAMLOG® Esthomic® Abutments PS, straight, for Platform Switching	-		K2202.3815	K2202.4315	K2202.5015	K2202.6015	1.5–2.5 mm
  CAMLOG® Esthomic® Abutments PS, 15° angled, type A, for Platform Switching	-		K2203.3815	K2203.4315	K2203.5015	K2203.6015	1.5–2.5 mm
  CAMLOG® Esthomic® Abutments PS, 15° angled, type B, for Platform Switching	-		K2204.3815	K2204.4315	K2204.5015	K2204.6015	1.5–2.5 mm
 CAMLOG® Esthomic® Abutments, Inset	K2235.3315	K2235.3815	K2235.4315	K2235.5015	K2235.6015		1.5–2.5 mm
 CAMLOG® Universal abutment	K2211.3300	K2211.3800	K2211.4300	K2211.5000	K2211.6000		-
  CAMLOG® Universal Abutment PS, for Platform-Switching with CAMLOG® Implants with K article numbers	-		K2201.3800	K2201.4300	K2201.5000	K2201.6000	-

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Gold-plastic abutment	K2246.3300	K2246.3800	K2246.4300	K2246.5000	K2246.6000	-
 CAMLOG® Titanium bases CAD/CAM, crown	K2244.3348	K2244.3848	K2244.4348	K2244.5048	K2244.6048	0.3–0.4 mm
 CAMLOG® Titanium bases CAD/CAM PS, crown	-	K2210.3808	K2210.4308	K2210.5008	-	0.8 mm
 CAMLOG® Titanium bases CAD/CAM, bridge	J2344.3348	J2344.3848	J2344.4348	J2344.5048	J2344.6048	0.4 mm
 CAMLOG® Titanium base CAD/CAM free, crown, short	K2247.3348	K2247.3848	K2247.4348	K2247.5048	-	0.3–0.4 mm
 CAMLOG® Titanium base CAD/CAM free PS, crown, short, for Platform Switching	-	K2247.3808	K2247.4308	K2247.5008	-	0.8 mm
 CAMLOG® Titanium base CAD/CAM free, crown, long	-	K2265.3848	K2265.4348	K2265.5048	-	0.3 mm
 CAMLOG® Titanium base CAD/CAM free PS, crown, long, for Platform Switching	-	K2265.3808	K2265.4308	K2265.5008	-	0.8 mm

Prosthetics overview

CAM blanks

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® CAM Titanium Blank, type IAC	K2431.3313	K2431.3813	K2431.4313	K2431.5013	K2431.6013	-
	K2432.3313	K2432.3813	K2432.4313	K2432.5013	K2432.6013	
 CAMLOG® CAM Titanium Blank, type ME	K2441.3320	K2441.3820	K2441.4320	K2441.5020	K2441.6020	-
	K2442.3320	K2442.3820	K2442.4320	K2442.5020	K2442.6020	
 CAMLOG® CAM CoCr Blank, type ME	K2461.3320	K2461.3820	K2461.4320	K2461.6020	K2461.6020	-
 CAMLOG® CAM Titanium Blank, type AG	K2471.3327	K2471.3827	K2471.4327	K2471.5027	K2471.6027	-

DEDICAM® CAD/CAM prosthetics from Camlog

Individually CAD/CAM fabricated titanium abutments are available from Camlog through our DEDICAM® Service Division. DEDICAM® Services are not available in all countries. Please ask your local BioHorizons/Camlog representative for details.

Multi-unit Abutments

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	GH
 CAMLOG® Multi-unit abutment, straight	J2264.3310	J2264.3810	J2264.4310	J2264.5010	1.0 mm
	J2264.3320	J2264.3820	J2264.4320	J2264.5020	2.0 mm
	J2264.3330	J2264.3830	J2264.4330	J2264.5030	3.0 mm
	-	J2264.3840	J2264.4340	-	4.0 mm
 CAMLOG® Multi-unit abutment, 17° angled, type A	K2266.3310	K2266.3810	K2266.4310	K2266.5010	1.0 mm
	K2266.3320	K2266.3820	K2266.4320	K2266.5020	2.0 mm
	K2266.3330	K2266.3830	K2266.4330	K2266.5030	3.0 mm
 CAMLOG® Multi-unit abutment, 17° angled, type B	K2267.3310	K2267.3810	K2267.4310	K2267.5010	1.0 mm
	K2267.3320	K2267.3820	K2267.4320	K2267.5020	2.0 mm
	K2267.3330	K2267.3830	K2267.4330	K2267.5030	3.0 mm
 CAMLOG® Multi-unit abutment, 30° angled, type A	K2268.3310	K2268.3810	K2268.4310	K2268.5010	1.0 mm
	K2268.3320	K2268.3820	K2268.4320	K2268.5020	2.0 mm
	-	K2268.3830	K2268.4330	K2268.5030	3.0 mm
 CAMLOG® Multi-unit abutment, 30° angled, type B	K2269.3310	K2269.3810	K2269.4310	K2269.5010	1.0 mm
	K2269.3320	K2269.3820	K2269.4320	K2269.5020	2.0 mm
	-	K2269.3830	K2269.4330	K2269.5030	3.0 mm

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	GH
 Healing cap for Multi-unit abutment	PXMUCC	PXMUCC	PXMUCC	PXMUCC	-
 Healing cap for Multi-unit abutment, wide body	PXMUCC	PXMUCC	PXMUCC	PXMUCC	-
 Impression cap for Multi-unit abutment, open tray	PXMUDPC	PXMUDPC	PXMUDPC	PXMUDPC	-
 Impression cap for Multi-unit abutment, closed tray	PXMUIC	PXMUIC	PXMUIC	PXMUIC	-
 Titanium scanbody for Multi-unit abutment	PXMUTSB	PXMUTSB	PXMUTSB	PXMUTSB	-
 Multi-unit lab analog	PXMUAR	PXMUAR	PXMUAR	PXMUAR	-
 Multi-unit implant analog	J3026.4800	J3026.4800	J3026.4800	J3026.4800	-
 Titanium coping for Multi-unit abutment	PXMUTC	PXMUTC	PXMUTC	PXMUTC	-
 Titanium coping for Multi-unit abutment, short	PXMUTCS	PXMUTCS	PXMUTCS	PXMUTCS	-
 Plastic base for Multi-unit abutment, burn-out	PXMUPC	PXMUPC	PXMUPC	PXMUPC	-
 Titanium bonding base with plastic sleeve, burn-out, Passive-Fit, for Multi-unit abutment	PXMUPFC	PXMUPFC	PXMUPFC	PXMUPFC	-
 Gold coping for Multi-unit abutment, cast-on	PXMUGC	PXMUGC	PXMUGC	PXMUGC	-
 ODSecure® Attachment for Multi-unit abutment	J2273.4801	J2273.4801	J2273.4801	J2273.4801	-
 Polishing protection for Multi-unit caps and bases	PXMUPA	PXMUPA	PXMUPA	PXMUPA	-

Prosthetics overview

COMFOUR® Abutments

	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	
Article	Art. No.					GH
 CAMLOG® Bar abutment, straight	J2254.3305	J2254.3805	J2254.4305	J2254.5005	-	0.5 mm
	J2254.3320	J2254.3820	J2254.4320	J2254.5020		2.0 mm
	-	J2254.3840	J2254.4340	J2254.5040		4.0 mm
 CAMLOG® Bar abutment, 17° angled, type A	K2256.3325	K2256.3825	K2256.4325	K2256.5025	-	2.5 mm
	K2256.3340	K2256.3840	K2256.4340	K2256.5040		4.0 mm
 CAMLOG® Bar abutment, 17° angled, type B	K2257.3325	K2257.3825	K2257.4325	K2257.5025	-	2.5 mm
	K2257.3340	K2257.3840	K2257.4340	K2257.5040		4.0 mm
 CAMLOG® Bar abutment, 30° angled, type A	K2258.3325	K2258.3825	K2258.4325	K2258.5035	-	2.5 mm/3.5 mm*
	K2258.3340	K2258.3840	K2258.4340	K2258.5050		4.0 mm/5.0 mm*
 CAMLOG® Bar abutment, 30° angled, type B	K2259.3325	K2259.3825	K2259.4325	K2259.5035	-	2.5 mm/3.5 mm*
	K2259.3340	K2259.3840	K2259.4340	K2259.5050		4.0 mm/5.0 mm*
	J2029.4300	J2029.4300	J2029.4300	J2029.6000	J2029.6000	-
	J2129.4300	J2129.4300	J2129.4300	J2129.6000	J2129.6000	-
	J2129.4310	J2129.4310	J2129.4310	J2129.6010	J2129.6010	-
	J2610.4300	J2610.4300	J2610.4300	J2610.6000	J2610.6000	-
	J2630.4300	J2630.4300	J2630.4300	J2630.6000	J2630.6000	-
	J3020.4300	J3020.4300	J3020.4300	J3020.6000	J3020.6000	-
	J3025.4300	J3025.4300	J3025.4300	J3025.6000	J3025.6000	-

* GH 3.5 and 5.0 mm only for Ø 5.0 mm

		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	
Article		Art. No.					GH
	Titanium cap for bar abutment, for crown	J2259.4301	J2259.4301	J2259.4301	J2259.6001	J2259.6001	-
	Titanium cap for bar abutment, for bridge	J2259.4302	J2259.4302	J2259.4302	J2259.6002	H2259.6002	-
	Titanium cap without retention for bar abutment, for bridge	J2259.4322	J2259.4322	J2259.4322	J2259.6022	J2259.6022	-
	Crown base for bar abutment, burn-out	J2256.4306	J2256.4306	J2256.4306	J2256.6006	J2256.6006	-
	Base for bar abutment, burn-out	J2257.4301	J2257.4301	J2257.4301	J2257.6001	J2257.6001	-
	Base for bar abutment, cast-on	J2263.4300	J2263.4300	J2263.4300	J2263.6000	J2263.6000	-
	Base for bar abutment, solderable	J2258.4300	J2258.4300	J2258.4300	J2258.6000	J2258.6000	-
	Base for bar abutment, titanium, laser-weldable	J2262.4300	J2262.4300	J2262.4300	J2262.6000	J2262.6000	-
	Titanium bonding base for bar abutment, Passive-Fit	J2260.4301	J2260.4301	J2260.4301	J2260.6001	J2260.6001	-
	Bar sleeve for titanium bonding base, burn-out, Passive-Fit	J2261.4301	J2261.4301	J2261.4301	J2261.6001	J2261.6001	-

Prosthetics overview

Hybrid restorations

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Locator® Abutment	J2253.3310	J2253.3810	J2253.4310	J2253.5010	-	1.0 mm
	J2253.3320	J2253.3820	J2253.4320	J2253.5020		2.0 mm
	J2253.3330	J2253.3830	J2253.4330	J2253.5030		3.0 mm
	J2253.3340	J2253.3840	J2253.4340	J2253.5040		4.0 mm
	-	J2253.3850	J2253.4350	J2253.5050		5.0 mm
 Locator® Impression cap	J2253.0200	J2253.0200	J2253.0200	J2253.0200	-	-
 Locator® Analog	J2253.0340	J2253.0340	J2253.0340	J2253.0350	-	-
 Locator® Male processing package	J2253.0102	J2253.0102	J2253.0102	J2253.0102	-	-
 Locator® Male processing package for extended range	-	J2253.0112	J2253.0112	J2253.0112	-	-
 Locator® Replacement male clear, strong	J2253.1005	J2253.1005	J2253.1005	J2253.1005	-	-
 Locator® Replacement male pink, medium	J2253.1003	J2253.1003	J2253.1003	J2253.1003	-	-
 Locator® Replacement male blue, light	J2253.1002	J2253.1002	J2253.1002	J2253.1002	-	-
 Locator® Replacement male for extended range, green, strong	-	J2253.2004	J2253.2004	J2253.2004	-	-
 Locator® Replacement male for extended range, orange, medium	-	J2253.2003	J2253.2003	J2253.2003	-	-
 Locator® Replacement male for extended range, red, light	-	J2253.2002	J2253.2002	J2253.2002	-	-
 Locator® Replacement male for extended range, gray, none	-	J2253.2000	J2253.2000	J2253.2000	-	-
 CAMLOG® Locator R-Tx® Abutment	30800-01	30801-01	30802-01	30803-01	-	1.0 mm
	30800-02	30801-02	30802-02	30803-02		2.0 mm
	30800-03	30801-03	30802-03	30803-03		3.0 mm
	30800-04	30801-04	30802-04	30803-04		4.0 mm
	-	30801-05	30802-05	30803-05		5.0 mm
 Locator R-Tx® Impression coping	30017-01	30017-01	30017-01	30017-01	-	-
 Locator R-Tx® Analog	30014-01	30015-01	30015-01	30016-01	-	-
 Locator R-Tx® Titanium housing	30013-01	30013-01	30013-01	30013-01	-	-
 Locator R-Tx® Processing insert	30012-01	30012-01	30012-01	30012-01	-	-
 Locator R-Tx® Processing spacer	30018-01	30018-01	30018-01	30018-01	-	-

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 Locator R-Tx® Retention insert gray, none	30001-01	30001-01	30001-01	30001-01	-	-
 Locator R-Tx® Retention insert blue, light	30002-01	30002-01	30002-01	30002-01	-	-
 Locator R-Tx® Retention insert pink, medium	30003-01	30003-01	30003-01	30003-01	-	-
 Locator R-Tx® Retention insert white, strong	30004-01	30004-01	30004-01	30004-01	-	-
 CAMLOG® Universal abutment	-	K2211.3800	K2211.4300	K2211.5000	K2211.6000	-
 CAMLOG® Universal abutment PS, for Platform Switching	-	K2201.3800	K2201.4300	K2201.5000	K2201.6000	-
 CAMLOG® Telescope abutment	-	K2212.3800	K2212.4300	K2212.5000	K2212.6000	-

Prosthetics overview

Hybrid restorations

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	GH
 CAMLOG® Ball abutments, male part	J2249.3315	J2249.3815	J2249.4315	J2249.5015	1.5 mm
	J2249.3330	J2249.3830	J2249.4330	J2249.5030	3.0 mm
	-	J2249.3845	J2249.4345	J2249.5045	4.5 mm
 Matrix CM Dalbo®-Plus	05003503	05003503	05003503	05003503	-
 Model analog for ball abutment	J3015.3300	J3015.3800	J3015.4300	J3015.5000	-
 CAMLOG® ODSecure® Abutment	J2273.3310	J2273.3810	J2273.4310	J2273.5010	1.0 mm
	J2273.3320	J2273.3820	J2273.4320	J2273.5020	2.0 mm
	J2273.3330	J2273.3830	J2273.4330	J2273.5030	3.0 mm
	J2273.3340	J2273.3840	J2273.4340	J2273.5040	4.0 mm
	J2273.3350	J2273.3850	J2273.4350	J2273.5050	5.0 mm
	J2273.3360	J2273.3860	J2273.4360	J2273.5060	6.0 mm
 ODSecure® Attachment for Multi-unit abutment	J2273.4801	J2273.4801	J2273.4801	J2273.4801	-
 ODSecure® Impression coping	ODSIC	ODSIC	ODSIC	ODSIC	-
 ODSecure® Analog	ODSA	ODSA	ODSA	ODSA	-
 ODSecure® Castable male	ODSCM	ODSCM	ODSCM	ODSCM	-
 ODSecure® Xtend housing cap, yellow anodized, 0°-50°	ODS-XH	ODS-XH	ODS-XH	ODS-XH	-
 ODSecure® Housing cap, pink anodized, 0°-30°	ODS-HCPM	ODS-HCPM	ODS-HCPM	ODS-HCPM	-
 ODSecure® Lab processing insert, black	ODS-PM	ODS-PM	ODS-PM	ODS-PM	-
 ODSecure® Retention cap insert, purple, hard	ODSRC-V	ODSRC-V	ODSRC-V	ODSRC-V	-
 ODSecure® Retention cap insert, clear, medium	ODSRC-C	ODSRC-C	ODSRC-C	ODSRC-C	-
 ODSecure® Retention cap insert, pink, soft	ODSRC-P	ODSRC-P	ODSRC-P	ODSRC-P	-
 ODSecure® Retention cap insert, yellow, extra soft	ODSRC-Y	ODSRC-Y	ODSRC-Y	ODSRC-Y	-
 ODSecure® Assortment Kit	ODS-CAK	ODS-CAK	ODS-CAK	ODS-CAK	-

Abutment and lab screws

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	GH
 CAMLOG® Abutment screw, hex	J4005.1601	J4005.1601	J4005.1601	J4005.2001	J4005.2001	-
 CAMLOG® Lab screw, hex	J4006.1601	J4006.1601	J4006.1601	J4006.2001	J4006.2001	-
	J4006.1603	J4006.1603	J4006.1603	J4006.2003	J4006.2003	
 CAMLOG® Abutment screw	J4004.1601	J4004.1601	J4004.1601	J4004.2001	-	-
 CAMLOG® Lab screw	J4004.1600	J4004.1600	J4004.1600	J4004.2000	-	-
 Prosthetic screw for Multi-unit abutment, short	PXMUPSS1	PXMUPSS1	PXMUPSS1	PXMUPSS1	-	-
	PXMUPSS	PXMUPSS	PXMUPSS	PXMUPSS	-	
 Prosthetic screw for Multi-unit abutment, regular	PXMUPSR1	PXMUPSR1	PXMUPSR1	PXMUPSR1	-	-
	PXMUPSR	PXMUPSR	PXMUPSR	PXMUPSR	-	
 Prosthetic screw for Multi-unit abutment, long	PXMUPSL	PXMUPSL	PXMUPSL	PXMUPSL	-	-
 Prosthetic screw for bar abutments	J4012.1601	J4012.1601	J4012.1601	J4012.2001	J4012.2001	-
 Lab prosthetic screw	J4013.1601	J4013.1601	J4013.1601	J4013.2001	J4013.2001	-

Screw overview Abutment and prosthetic screws – intraoral use

Implant-Abutment connection

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	Tightening torque
	M1.6		M2.0			
 Temporary abutments PEEK Scanbody ScanPost for Sirona®						
 Temporary titanium abutments, crown and bridge						tightened by hand**
 Esthomic® Abutments						
 Universal abutment Telescope abutment Gold-plastic abutment			10.5 mm  J4005.1601		10.5 mm  J4005.2001	
 Titanium bases CAD/CAM, crown and bridge						20 Ncm*
 Titanium bases CAD/CAM PS, crown						
 Titanium bases CAD/CAM free, crown and bridge						
 CAM blanks types AG, ME and IAC						
CAMLOG® Abutment screws with reduced head, light blue anodized						
 Multi-unit Abutments 17° and 30° angled			9.5 mm  J4004.1601		9.5 mm  J4004.2001	20 Ncm*
 Bar abutments 17° and 30° angled						

* with torque wrench J5320.1030

** optional for temporary titanium abutments: torque after completed healing phase 20 Ncm

All screws must be retightened with the corresponding torque after at least 5 minutes!

Abutment-Prosthetic connection

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Tightening torque
	M1.4				
 Caps and bases on Multi-unit abutments					
	3.7 mm 				
		PXMUPSS1			
	4.5 mm 				15 Ncm*
		PXMUPSR1			
	17.0 mm 				
		PXMUPSL			


Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	Tightening torque
	M1.6				M2.0	
 Scanning caps for bar abutments						
 Caps and bases for bar abutments	3.6 mm 			3.8 mm 		tightened by hand
					J4012.1601	J4012.2001
						15 Ncm*

* with torque wrench J5320.1030

All screws must be retightened with the corresponding torque after at least 5 minutes!


Screw overview Lab screws – extraoral use

Lab analog-Abutment connection

Article	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	Tightening torque
	M1.6		M2.0			
 Temporary abutments PEEK Scanbody ScanPost for Sirona®						
 Temporary titanium abutments, crown and bridge						
 Esthomic® Abutments						
 Universal abutment Telescope abutment Gold-plastic abutment			10.5 mm  J4006.1601		10.5 mm  J4006.2001	tightened by hand
 Titanium bases CAD/CAM, crown and bridge  Titanium bases CAD/CAM PS, crown						
 Titanium bases CAD/CAM free, crown and bridge						
 CAM blanks types AG, ME and IAC						
CAMLOG® Bonding aids						
 Titanium bases CAD/CAM, crown, incl. PS and bridge		27.5 mm  J4009.1600		27.5 mm  J4009.2000		tightened by hand
CAMLOG® Lab screws* with reduced head, partially light blue anodized						
 Multi-unit Abutments 17° and 30° angled		9.5 mm  J4004.1600		9.5 mm  J4004.2000		tightened by hand
 Bar abutments 17° and 30° angled						

* Lab screws may not be used on patients!


Abutment-Prosthetic connection

	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm
Article	Prosthetic screws for Multi-unit abutments, blue anodized			
 Caps and bases on Multi-unit abutments	3.7 mm  PXMUPSS1		4.5 mm  PXMUPSR1	
			17.0 mm  PXMUPSL	
	tightened by hand			

	Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	Ø 6.0 mm	
	M1.6		M2.0			
Article	Lab prosthetic screws* for bar abutments, brown anodized					Tightening torque
Scanning caps for bar abutments	3.6 mm 		3.8 mm 			tightened by hand
Caps and bases for bar abutments						
Titanium bonding base for bar abutments and bar sleeve for titanium bonding base, burn-out, Passive-Fit	Prosthetic screw for bar abutments*, for fabrication of the wax up on the bar sleeve for titanium bonding base, Passive-Fit, on the bar lab analog					
	5.5 mm 	J4005.1602		5.5 mm 	J4005.2002	

* Lab screws may not be used on patients!

Overview tightening torques

Article	Instrument	Tightening torque
Implant cover screw		
Healing caps cylindrical, wide body, wide body, narrow emergence and bottleneck		
Scanbody Scanbody multi-use ScanPost for Sirona®		tightened by hand*
Impression post Bite registration post	 J5317.0510	
Temporary abutment, PEEK Temporary abutment, crown and bridge	 J5317.0501	
Titanium bases CAD/CAM, crown and bridge Titanium bases CAD/CAM PS, crown	 J5317.0502	
Universal abutment Telescope abutment Gold-plastic abutment	 J5317.0504	20 Ncm
 J5317.0503		
Esthomic® Abutment, straight, 15° and 20° Esthomic® Abutment, Inset		
CAM blanks types IAC, ME and AG		



* optional for temporary titanium abutments: torque after completed healing phase 20 Ncm

All screws must be retightened with the corresponding torque after at least 5 minutes!

Article	Instrument	Tightening torque
 Titanium bases CAD/CAM free, crown	 J5317.0510  J5317.0501  J5317.0502  J5317.0504  J5317.0503  J5319.0501*  J5319.0502*  J5319.0504*  J5319.0503*	20 Ncm





* Only for use with angled screw channel

Overview tightening torques

Article	Instrument	Tightening torque
 Multi-unit abutment, straight	 J5300.0039  J5300.0040  PXMUHAAH	30 Ncm*
 Multi-unit abutment, 17° and 30° angled		20 Ncm*
 Healing caps for Multi-unit abutment		
 Titanium scanbody for Multi-unit abutment	 J5317.0510	
 Titanium caps for Multi-unit abutment	 J5317.0501	
 Plastic base for Multi-unit abutment, burn-out	 J5317.0502	15 Ncm*
 Titanium bonding base with plastic sleeve, burn-out, Passive-Fit, for Multi-unit abutment	 J5317.0504	
 Gold base for Multi-unit abutment, cast-on	 J5317.0503	
 ODSecure® Insert for Multi-unit abutment		

* with torque wrench J5320.1030

All screws must be retightened with the corresponding torque after at least 5 minutes!

Article	Instrument	Tightening torque								
		Ø 3.3 mm	Ø 3.8 mm	Ø 4.3 mm	Ø 5.0 mm	3.3	3.8	4.3	5.0	6.0
 Bar abutments, straight	 J5300.0020  J5300.0021  J5300.0025	20 Ncm*	30 Ncm*							
 Bar abutments, 17° and 30° angled						20 Ncm*				
 Healing cap for bar abutment										
 Scanning caps for bar abutments	 J5317.0510					tightened by hand				
 Titanium caps for bar abutment, for crown/bridge	 J5317.0501									
 Crown base for bar abutment, burn-out	 J5317.0502					15 Ncm*				
 Bases for bar abutment, burn-out, cast-on, solderable, laser-weldable	 J5317.0504									
 Titanium bonding bases for bar abutment, Passive-Fit	 J5317.0503									
 ODSecure® Abutment						20 Ncm*	30 Ncm*			
 Locator R-Tx® Abutment										
 Impression cap for bar abutment, closed tray	 J5300.0027  J5300.0028					tightened by hand				
 Ball abutment	 J5300.0011					20 Ncm*	30 Ncm*			
 Locator® Abutment	 J2253.0001									

* with torque wrench J5320.1030

All screws must be retightened with the corresponding torque after at least 5 minutes!

Materials

Titanium Grade 4	
Properties (ASTM F67 and DIN EN ISO 5832-2)	
Chemical structure (in %)	O ≤ 0.4
	Fe ≤ 0.5
	C ≤ 0.08
	N ≤ 0.05
	H ≤ 0.0125
	Ti Rest
Mechanical properties	Tensile strength ≥ 550 MPa
	Elongation at break ≥ 10 %

Titanium alloy Ti-6Al-4V ELI	
Properties (ASTM F136)	
Chemical structure (in %)	Al 5.5–6.5
	V 3.5–4.5
	Fe ≤ 0.25
	C ≤ 0.08
	N ≤ 0.05
	O ≤ 0.13
Mechanical properties	H ≤ 0.012
	Ti Rest
Mechanical properties	Tensile strength ≥ 860 MPa
	Elongation at break ≥ 10 %

Cast-on gold alloy CAMLOG® Gold-plastic abutment	
Properties	
Chemical structure (in %)	Au 60
	Pd 20
	Pt 19
	Ir 1
Physical properties	Melting range 1400–1490 °C
	Density 17.5 g/cm³
	E-Modul 136 GPa
	Coefficient of thermal expansion (25–500°C) 11.9 10⁻⁶ K⁻¹
	Coefficient of thermal expansion (25–600°C) 12.2 10⁻⁶ K⁻¹
	Color white
Mechanical properties	Status cold-formed
	Hardness HV5 > 215
	Tensile strength (Rm) > 750 MPa
	0.2% Elongation limit (Rp 0.2%) > 650 MPa
	Elongation at break > 2 %

Cast-on gold alloy bar base for bar abutment	
Properties	
Chemical structure (in %)	Au 60
	Pt 19
	Pd 20
	Ir 1
Physical properties	Density 17.5 g/cm³
	Color white
	Liquidus 1490 °C
	Solidus 1400 °C
	Coefficient of thermal expansion (25–500°C) 12.5 10⁻⁶ K⁻¹
	Coefficient of thermal expansion (25–600°C) 12.6 10⁻⁶ K⁻¹
	E-Modul 136 GPa
Mechanical properties	hardened 700 °C / 30 min
	Hardness HV5 210
	0.2% Elongation limit 450–570 MPa
	Elongation at break min. 10 %
	Tensile strength MPa 530–650

Solderable gold alloy bar base for bar abutment		
Properties		
Chemical structure (in %)	Au	68.60
	Pt	2.45
	Ag	11.85
	Pd	3.95
	Cu	10.60
	Zn	2.50
	Ir	0.05
	Rh	-
	Ru	-
Physical properties	Color	yellow
	Melting range	880–940°C
Mechanical properties	Hardness annealed HV5	175
	hardened HV5	275
	self hardened HV5	240

CoCr alloy		
Properties (ASTM F1537-20 and ISO 5832-12)		
Chemical structure (in wt %)	Cr	26.0–30.0
	Mo	5.0–7.0
	Fe	≤ 0.75
	Ni	≤ 0.1*
	Mn	< 1.0
	Si	< 1.0
	N	< 0.25
	C	≤ 0.14
	Co	Rest
Physical properties	Coefficient of thermal expansion (25–500°C)	14.2–14.4 10^{-6} K^{-1}
	Tensile strength	> 827 MPa
Mechanical properties	Breaking strength	1172–1400 MPa
	Elongation at break	> 12 %
	Hardness (HRC)	38–48

* ASTM F1537-20 and ISO 5832-12: ≤ 1.0 weight-%

Further documentation

Further information on the CAMLOG® Products can be found in the following documents:

- CAMLOG® Working Instructions
- CAMLOG® Instructions for Use
- Preparation instructions
- Camlog literature overview
- Clinical evidence and science

The documents are available from the local Camlog representative.

See also:

<https://ifu.camlog.com>
www.camlog.com

References

- 1 Conserva E. Initial stability after placement of a new buttress-threaded implant. A case series study. *Implants*. 2019(3): 24-28.
- 2 Ruppin J. One-year clinical experience with Progressive-Line implants. *EDI journal*. 2020(4): 54-63.
- 3 CAMLOG® IMPLANT SYSTEM/CONELOG® IMPLANT SYSTEM – Die Promote® Oberfläche – eine hochmoderne Titanoberfläche für die Implantologie. M-0173-WPR-DACH-CL-00-022022.
- 4 Semper-Hogg W, Kraft S, Stiller S, Mehrhof J, Nelson K. Analytical and experimental position stability of the abutment in different dental implant systems with a conical implant-abutment connection. *Clin Oral Investig*. 2013;17(3): 1017-23.
- 5 Semper-Hogg W, Zulauf K, Mehrhof J, Nelson K. The influence of torque tightening on the position stability of the abutment in conical implant-abutment connections. *Int J Prosthodont* 2015;28(5):538-41.

Legal

General disclaimer

The information provided is intended for marketing purposes only and does not qualify the user to use the product in a clinical setting. To ensure correct application, please refer to the relevant Instructions for Use and the Working Instructions before use.

Trademarks and copyright

Protected trade names (trademarks) are not always specially indicated. The absence of such a reference does NOT mean that it is not a protected trademarked name. The document including all its parts is protected by copyright. You may download the content regarding the intended use, but changes to or reproduction of the content are not permitted. Any use outside the narrow limits of copyright law without the prior written consent of CAMLOG Biotechnologies GmbH is prohibited and is subject to legal sanctions.

Unless otherwise stated, all product names, whether printed in capital letters or accompanied by the trademark symbol, are trademarks of BioHorizons Inc. or CAMLOG Biotechnologies GmbH, their subsidiaries, affiliated companies, or their licensors. Locator®, Locator R-Tx®, R-Tx, ZEST, and Zest Dental Solutions, as well as the color and shape of the replacement males, are registered trademarks of ZEST IP Holdings, LLC. Dalbo®-Plus is a registered trademark of Cendres + Métaux SA, Biel, Switzerland. DIM-Analog® is a registered trademark of the IPD Dental Group company.

The referenced trademarks may not be registered in all countries. All third party trademarks belong to the respective trademark owners. CAMLOG Biotechnologies GmbH can only place products on the market after approval by the competent national authorities. Therefore, not all products and services are available in all countries.

Manufacturer

CAMLOG® and CONELOG® Products are manufactured by:

ALTATEC GmbH | Maybachstr. 5 | 71299 Wimsheim | Germany

Customized DEDICAM® Products are manufactured by:

ALTATEC GmbH | Maybachstr. 5 | 71299 Wimsheim | Germany

Biotech Dental Digital SAS | 305 Allées de Craponne | 13300 Salon de Provence | France

Locator® and Locator R-Tx® are manufactured by Zest Anchors LLC.

Dalbo®-Plus is manufactured by Cendres + Métaux SA, Biel, Switzerland.

The drill shaft extension is manufactured by Gebr. Brasseler GmbH & Co. KG, Lemgo, Germany.

The torque wrench 10–70 Ncm is manufactured by Josef Ganter Feinmechanik GmbH, Dauchingen, Germany.

DIM-Analog® is manufactured by IMPLANT PROTESIS DENTAL 2004 S.I., Premià de Dalt (Barcelona), Spain.


Notes

Notes

€ 0123



+E2193800100031D



+\$0120200001DD

Art. No. J8001.0003 Rev. 12.09.2025

Headquarters

CAMLOG Biotechnologies GmbH | Margarethenstr. 38 | 4053 Basel | Switzerland
Telephone +41 61 565 41 00 | Fax +41 61 565 41 01 | info@camlog.com | www.bhclgroup.com